MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS 1963-A

# DEPARTMENT OF OCEAN ENGINEERING

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

CAMBRIDGE, MASSACHUSETTS 02139

THE COUPLED THREE DEGREE OF FREEDOM MOTION RESPONSE OF
A DRYDOCKED SUBMARINE TO SEISMIC LOAD

BY
DALE EDWARD SIGMAN
OCEAN ENGINEERING - COURSE XIIIA
MECHANICAL ENGINEERING - COURSE II

JUNE 1986

THE COUPLED THREE DEGREE OF FREEDOM MOTION RESPONSE
OF A DRYDOCKED SUBMARINE TO SEISMIC LOAD

by

DALE EDWARD SIGMAN
B.S., Kansas University
(1980)

SUBMITTED TO THE DEPARTMENT OF OCEAN ENGINEERING AND
MECHANICAL ENGINEERING IN PARTIAL FULFILLMENT OF THE
REQUIREMENTS FOR THE DEGREES OF

OCEAN ENGINEER
and
MASTER OF SCIENCE IN MECHANICAL ENGINEERING

at the

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

June 1986

© DALE E. SIGMAN, 1986

Signature of Author_____
                        Department of Ocean Engineering
                                          May 1986

Certified by:_____
                              Professor Dale G. Karr
                                    Thesis Supervisor

Certified by:_____
                            Professor J. Karl Hedrick
                                        Thesis Reader

Accepted by:_____
                      Professor A.D. Carmichael, Chairman
          Ocean Engineering Department Graduate Committee

Accepted by:_____
                          Professor A.A. Sonin, Chairman
      Mechanical Engineering Department Graduate Committee

# THE COUPLED THREE DEGREE OF FREEDOM MOTION RESPONSE OF A
## DRYDOCKED SUBMARINE TO SEISMIC LOAD

by

DALE EDWARD SIGMAN

Submitted to the Department of Ocean Engineering and
Mechanical Engineering in partial fulfillment of the
Requirements for the Degrees of Ocean Engineer and Master of
Science in Mechanical Engineering.

## ABSTRACT

A mathematical model is developed to analyze the seismic
response of a drydocked vessel in three degrees of freedom;
vessel rotation about its keel and vessel horizontal and
vertical translations relative to the drydock cradle. Data
from eleven actual vessel-drydock systems and the time
acceleration history of an earthquake are implemented to
predict vessel three degree of freedom response during an
earthquake. Vessel seismic response and the resultant drydock
forces are compared to vessel-drydock system failure criteria
to determine stability of the system during earthquakes. The
three degree of freedom vessel response model is compared to a
one and two degree of freedom vessel response models and a
model in which seismic loading is simulated by a single static
force. The three degree of freedom vessel motion is shown to
be the most accurate method for analyzing vessel-drydock
system failure criteria.

THESIS SUPERVISOR:    Dale G. Karr, Ph.D.

      TITLE:    Assistant Professor of Ocean Engineering

*NAVAl PostGRADuATe School*
*MONTeRey CA 93943- 5000*
*N00228-85-G-3262*

## ACKNOWLEDGEMENTS

Accession For

| NTIS GRA&I | ☒ |
| DTIC TAB | ☐ |
| Unannounced | ☐ |
| Justification | form 5b per |

By

Distribution/

Availability Codes

Dist | Avail and/or Special

A-1

QUALITY INSPECTED 4

TABLE OF CONTENTS

# TABLE OF CONTENTS (Cont.)

## LIST OF FIGURES

## LIST OF FIGURES (Cont.)

Page

## LIST OF FIGURES (Cont.)

# LIST OF TABLES

# 1.0 INTRODUCTION

## 1.1. Background

In the design of a drydock for military vessels, an important factor is the environmental-generated forces that are found in the drydock cradle which supports the ship. Earthquakes and the wind are considered the two most significant environmental loading factors. This thesis explores the seismic loading aspect of the problem.

Regardless of its location, any U.S. Navy ship that is nuclear powered and in drydock is considered to be in a high seismic risk area. Currently the Navy defines a high seismic risk area as one in which earthquake forces be approximated by a steady horizontal force of 0.2 g times the vessel mass acting at the center of gravity. The drydock can be analyzed to see if it can withstand this quasi-static loading.

## 1.2 Previous Work

In 1981 B.V. Viscomi studied the seismic response of a drydocked submarine using a single degree of freedom model [14]. This analysis assumed that the vessel was allowed to rotate about the keel. Viscomi used the time history acceleration record of the North-South component of the 1946 El Centro, CA Earthquake, California Institute of Technology processing scheme. The vessel was analyzed for system failure (i.e. the vessel lifting off of a row of side blocks).

A thesis by C.F. Barker in 1985 [1] used a two degree of freedom model to study seismic response. Employing the 1946 El Centro Earthquake, Massachusetts Institute of Technology

-11-

standard processing scheme, Barker analyzed rotation about the keel plus horizontal relative translation between the vessel and the drydock cradle perpendicular to the vessel longitudal axis. The two degree of freedom model permitted the analysis of drydock cradle failure: block sliding and tipping, which were not possible to analyze in Viscomi's one degree of freedom model, along with block liftoff.

### 1.3  Contributions of This Thesis

This thesis develops a three degree of freedom model of a vessel in drydock. Motion will be permitted in three directions: rotation about the keel and relative translations, horizontal and vertical, between the vessel and the drydock cradle. The three degree of freedom model will make possible the analysis of drydock cradle failure: additional block crushing forces due to vertical motion, which was not conceivable in the previous one and two degree of freedom models developed by Viscomi and Barker respectively, along with block sliding, tipping and liftoff.

The seismic input for the three degree of freedom model is the time acceleration history of the North-South component of the 1946 El Centro, CA Earthquake, Massachusetts Institute of Technology standard processing scheme. The MIT version of the El Centro Earthquake acceleration record is described in reference [9] , and is displayed graphically in Figure 1.1.

### 1.4  Outline of This Thesis

Section  2 of this thesis describes the vessel-drydock system for the reader and introduces terms which are used throughout the thesis. Section  3 describes the various

-12-

failure mechanisms found in the vessel-drydock system which can occur.

Section 4 examines the modelling of the vessel-drydock system under seismic loading. Section 4.1 describes the quasi-static loading method, and Section 4.2 develops the one degree of freedom equation of vessel motion model. Section 4.3 develops the two degree of freedom equations of vessel motion model. Finally, Section 4.4 develops the three degree of freedom equations of motion model.

Section 5 discusses the system parameters that are required for the mathematical model found in Section 4. Included in this Section is the modelling of block stiffness. Eleven typical vessel-drydock system configurations are studied to be implemented into Section 6.

Section 6 examines methods of evaluating the one, two and three degree of freedom models found in Section 4. Section 6.1 evaluates the linear equations of motion models using modal analysis method. Section 6.2 evaluates both linear and non-linear equations of motion models using a fourth-order Runge-Kutta numerical analysis scheme. Section 6.3 explains the response spectrum method of determining the maximum value of vessel seismic response. Section 6.4 determines system response using quasi-static force method.

Section 7 describes the development and testing of the one, two and three degree of freedom vessel motion computer programs, and contains the results for a seismic analysis of several actual vessel-drydock systems.

Section 8 summarizes the response predictions for several

-13-

actual vessel-drydock systems obtained with quasi-static, one degree of freedom, two degree of freedom and three degree of freedom analysis methods, and conclusions are drawn.

Appendix 1 is an example listing of the fourth-order Runge-Kutta computer program. Appendix 2 is an example listing of the modal analysis computer program. Finally, Appendix 3 describes the modal analysis of the two and three degree of freedom vessel-drydock systems and predicts maximum system response using the response spectrum method of analysis and modal participation factors.
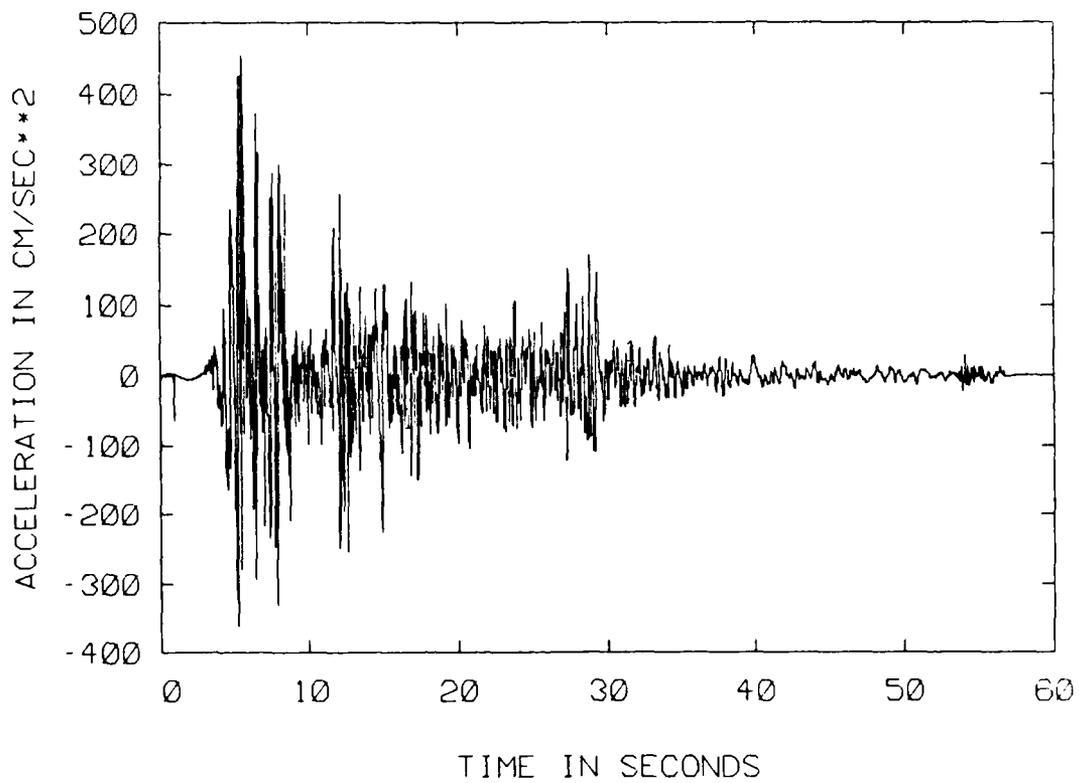
**FIGURE 1.1**
Acceleration Time History, El Centro Earthquake, 1946

-15-

## 2.0  THE VESSEL-DRYDOCK SYSTEM

### 2.1  General Description

In order to perform inspection, maintentance and repair on the outer hull of a ship, it is necessary to place the vessel in a drydock.  A drydock is a concrete encasement built into the earth.  At one end of the drydock is a flood gate to allow the entry and departure of the vessel.  A cradle, formed by drydock blocks, is built upon the drydock floor in order to support the ship once the water is pumped out of the encasement.  The drydock must be able to hold the weight of the vessel and cradle.

Due to the various hull configurations associated with the different classes of ships, the cradle component of the drydock-cradle-vessel system is varied to suit a particular docking situation.  The cradle accomplishes the transfer of vessel weight to the drydock floor, provides stable support to the vessel and allows access to the vessel hull.  This cradle is usually constructed of timber, concrete, or a timber-concrete composite.

### 2.2  System Component

The primary components of the drydock-cradle-vessel system are shown in Figure 2.1.  This section defines terms, related to docking, used in this thesis to describe the system components.

1. __Blocks__ - The units, consisting of timber, concrete, steel and other materials, which together make up the cradle.

2. __Cradle__ - A framework of blocks which supports the vessel when the drydock is dewatered.

3. __KG__ - The distance between the vessel baseline (ship's keel) to its vertical center of gravity.

4. __Keel Blocks__ - The center blocks, directly beneath the vessel's keel.

5. __Pier__ - A column built of blocks that extends from the ship hull to dock floor.

6. __Side Blocks__ - The blocks located to the right and left of the keel blocks.

7. __Ton__ - A long ton, 2240 lbs.

8. __g__- Acceleration of gravity, 32.2 ft/sec$^2$.
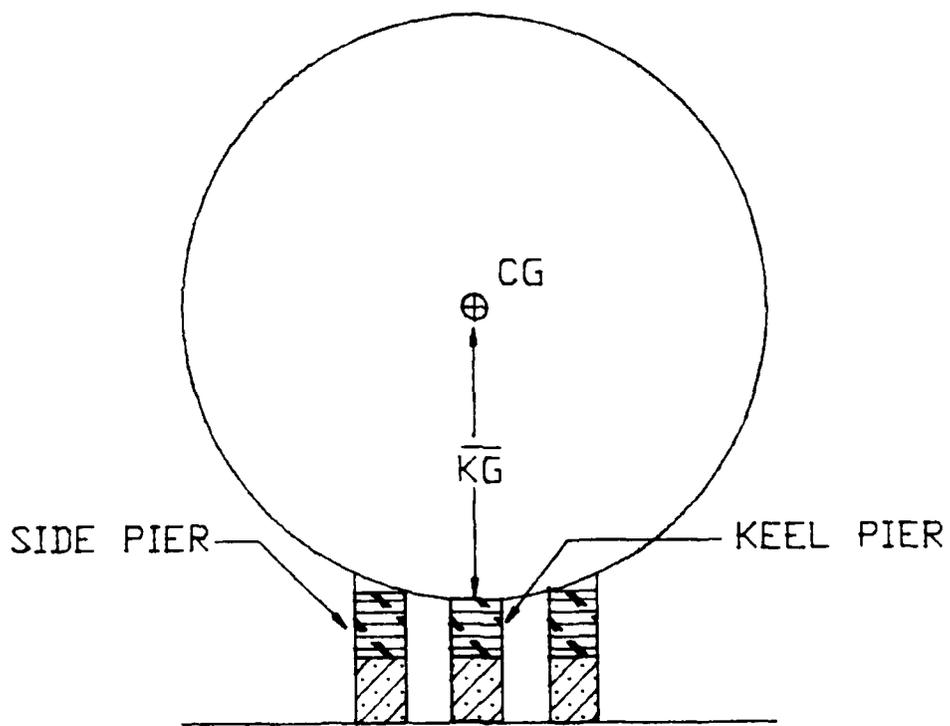
**FIGURE 2.1**
**Vessel-Drydock System**

## 3.0 VESSEL-DRYDOCK SYSTEM FAILURE MECHANISMS

There are four failure modes that the vessel-drydock system can exhibit: block crushing, block sliding, block overturning and block liftoff (i.e. the liftoff of vessel from a row of blocks).

### 3.1 Block Crushing[6]

A block can support compressive stresses linearly until the blocks' proportional limit is exceeded. The proportional limit is a material property of the block and is the maximum compressive stress at which stress is still linearly proportional to strain. If the compressive proportional limit is exceeded, the block is considered to have failed.

### 3.2 Block Sliding[6]

Due to friction at the interfaces between the blocks and the vessel and between blocks with other blocks, drydock blocks will have the tendency to resist sliding when subjected to vertical and horizontal loads. This is true when in the absence of mechanical fasteners.

First consider the blocks that form the keel pier. Figure 3.1 shows that the resistance of the keel pier to sliding is

$$H = \mu_1 V \quad \text{(block-block interface)}$$

and $H = \mu_2 V$ (vessel-block interface)

where

    $H$ = horizontal resisting force

    $\mu_1$ = coefficient of friction, block-block interface

    $\mu_2$ = coefficient of friction, block-vessel interface

    $V$ = vertical load on the blocks.

Failure of the keel pier due to sliding will occur when the ratio of horizontal force to the vertical force is greater than the lowest coefficient of friction found in the block. In other words, sliding occurs when

$$\frac{H}{V} > (\mu_1 \text{ or } \mu_2).$$

As with the keel piers, the resistance of the side piers to sliding will depend on the interface which offers the least resistance, the block-vessel interface or the block-block interface. However, this case is more complicated due to the complex geometry of the side pier as shown in Figure 3.2.

The block-vessel interface of the side pier is examined and shown in Figure 3.3. An arbitrary force F at some angle from vertical is applied to the face for the side block cap. At this interface, the horizontal and vertical block force reactions are:

Normal Force = $H \sin\phi + V \cos\phi$

Tangential Force = $H \cos\phi - V \sin\phi$

where          $H$ = Horizontal Reaction

              $V$ = Vertical Reaction

              $\phi$ = Block Inclination Angle.

Using the formula for horizontal sliding resistance, $H = \mu V$, previously introduced in the keel pier case and the above equations yields

$$H \cos\phi - V \sin\phi = \mu_2 (H \sin\phi + V \cos\phi).$$

Rearranging the above equation gives

$$\frac{H}{V} = \frac{\mu_2 \cos\phi + \sin\phi}{\cos\phi - \mu_2 \sin\phi}$$

or

$$\frac{H}{V} = \mu_2'$$

where
$$\mu_2' = \frac{\mu_2 \cos\phi + \sin\phi}{\cos\phi - \mu_2\sin\phi} \quad .$$

For the block-block interface of the side pier, sliding resistance is found by taking the vertical and horizontal components of the applied force, F, and using them in the formula $H = \mu_1 V$. Like in the keel pier, failure of the side pier due to sliding will occur when the following is satisfied

$$\frac{H}{V} > (\mu_1 \text{ or } \mu_2').$$

There is a critical angle $\alpha$ where no slippage occurs. Referring again to Figure 3.3, this angle can be calculated by comparing the maximum tangential force $F_{t\ max}$ the interface can have without slipping and the corresponding normal force $F_n$. The following relationship holds

$$F_{t\ max} = \mu F_n$$

Finally,

$$\alpha = \text{arc tan } \mu.$$

Since the applied force F acts in a straight line through all blocks to the ground, the angle $\alpha$ for each interface must be calculated. If force F is applied outside of these angles, slippage will occur.

### 3.3  Block Overturning[11]

The third failure mechanism is the overturning of a block due to an applied force. The line of action of this force must fall within the middle one-third of the base of the block, as shown in Figure 3.4, or the block will tip over.

In order to show the region that the block will remain upright, the inclined force F must be broken into a transverse

component $F_h$ and a vertical component $F_v$. Superposing the
bending and axial stresses caused by $F_h$ and $F_v$ gives the
resultant stress at any point in the block as

$$\sigma_x = -\frac{Ly}{I_z} F_h - \frac{F_v}{A}$$

where L = block height

A = base area, here bh

$I_z$ = base moment of intertia, here $bh^3/12$.

The minimum stress point on the bottom of the block
occurs at point M (Figure 3.4), a distance -h/2 from the z
axis. Hence,

$$(\sigma_x)_m = \frac{6L}{bh} F_h - \frac{F_v}{bh} \quad.$$

When $\sigma_{xm}$ at M is negative, compressive stress is present and
the block is stable. When $\sigma_{xm}$ at M is positive, tensile
stress is present and the block will overturn since no
fasteners hold block to the ground to develop tensile stress.
The limit of block stability is when

$$(\sigma_x)_m = 0.$$

Thus, the following equation holds

$$F_h = \frac{h}{6L} F_v.$$

This condition exists when force F is applied at an angle such
that the line of force lies within the one-third of the base
of the block. If the line of force is outside this region,
the block will tip.

### 3.4 Vessel Liftoff[14]

The fourth and final failure mode occurs when the vessel
breaks contact with either the side or keel piers. This
failure occurs when the dynamic deflection of a row of blocks
is equal to, or exceeds the average static deflection of the

blocks.   The static deflection of blocks is given by

$$\delta_s = \frac{W}{2K_{sv} + K_{kv}}$$

where          $W$ = submarine weight

$K_{sv}$ = side pier vertical stiffness

$K_{kv}$ = keel pier vertical stiffness.

The dynamic deflection can be due to vertical displacement $y$, rotational displacement $\theta$, or a combination of both.
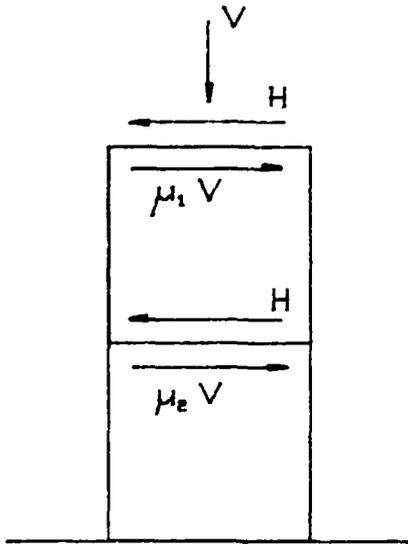
FIGURE 3.1
Keel Pier Forces
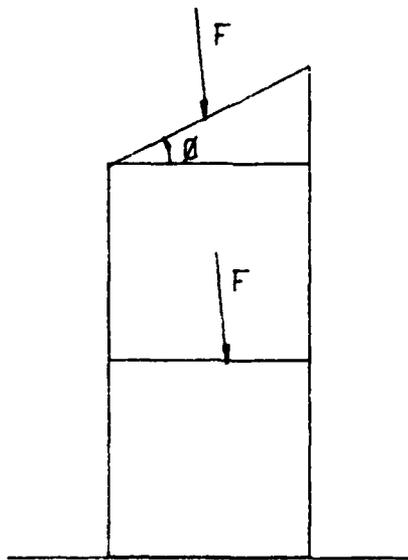


FIGURE 3.2
Side Pier Forces, General

--24--
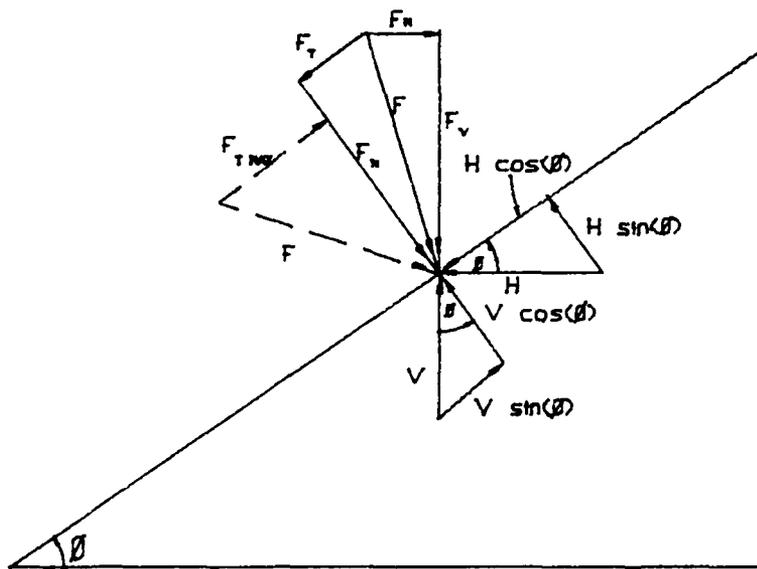
FIGURE 3.3
Side Pier Forces, Block-Vessel Interface.
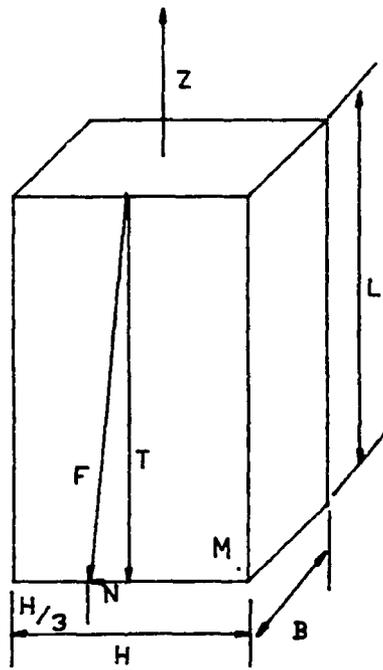
FIGURE 3.4
Block Tipping Forces

## 4.0 MATHEMATICAL MODELS OF VESSEL-DRYDOCK SYSTEM

This portion of the thesis discusses the modelling of the drydocked submarine subjected to a seismic load. Models will include a quasi-static method, one, two and three degree of freedom mathematical models. The models developed in this section will be analyzed in Section 6 and 7 to predict the vessel seismic response.

### 4.1 The Quasi-static Method of Modelling Seismic Response

#### 4.1.1 Approach[5,6]

Current U.S. Navy design method for submarine's seismic response will be examined in this section. The submarine is described as a rigid cylindrical body with its weight evenly dispersed longitudinally.

The quasi-static force method replaces the earthquake motions by a force corresponding to the vessel mass time 0.2 g. This force is horizontally applied to the submarine's center of gravity in the tranverse direction. The drydock blocking system is determined by the evaluation of the loads generated by the quasi-static force.

#### 4.1.2 Force Equations

The application of the static force to the center of gravity of the submarine in drydock is represented in Figure 4.1. The seismic overturning moment, $M_S$, is defined as

$$M_S = (\Delta/g)(a)(\overline{KG})(2240) \quad \text{ft-lb}$$

where

$\Delta$ = vessel displacement in long tons

$g$ = acceleration of gravity

$a$ = vessel's center of gravity acceleration.

-27-

Current U.S. Navy design practice states that the acceleration
of the submarine's center of gravity, a, should be set equal
to 0.2 g.  Hence

$$M_s = 448(\Delta)(\overline{KG}) \text{ ft-lb}$$

After determining the seismic overturning moment, the
number of sideblocks required on one side of the vessel is

$$N = \frac{M_s}{A \ S_p L}$$

where

    $N$ = # of side blocks required in the row

    $A$ = contact area of a block in square inches

    $S_p$ = proportional limit of the block cap in $lb/in^2$

    $L$ = distance between centerline of keel and side
        blocks, in feet, as shown in Figure 4.1.

### 4.1.3 Vessel Response in the Quasi-static Load Method

The application of a force applied at a vessel's center
of gravity will generate reactionary side block forces in the
vertical direction to oppose the seismic moment, as shown in
Figure 4.2.  Summation of moments about the keel yields the
equation

$$\Sigma M = M_s - L(F_{sr} + F_{mr}) + L(F_{sl} - F_{ml}) = 0 \qquad (4.1.1)$$

where

  $F_s$ = static pier forces (left and right)

  $F_m$ = pier forces due to the applied moment (left and right),

Due to symmetry in the vessel-drydock system,      the
applied moment resistive forces in the side blocks are equal

in magnitude but opposite in direction.  Thus, Equation 4.1.1
simplifies to the form

$$M_s = 2L(F_m)$$ (4.1.2)

where $F_m = F_{ml} = F_{mr}$.

The force $F_m$ is equal to the side pier compression
displacement, $\delta m$, times its vertical stiffness, $K_{vs}$.  This
compression displacement can be expressed as

$$\delta_m = L \sin(\theta).$$ (4.1.3)

where $\theta$ = angle or vessel rotation about its keel.
Assuming the rotational angle is small, Equations 4.2.1 and
4.1.3 are combined to yield

$$\theta = \frac{M_s}{2L^2 K_{sv}} .$$ (4.1.4)

## 4.2  One Degree of Freedom:  Rotational Response

### 4.2.1  Approach

A one degree of freedom mathematical model of a submarine
in drydock is developed in this section.  The submarine is
identified as a rigid cylindrical body with an even
longitudinal weight distribution.  The system damping and
stiffness are provided by the drydock blocking arrangement.
System excitation is due to seismic ground accelerations.
Other assumptions are

- The keel and side piers remain vertical during the
  ground motions,

- no slippage between the block cradle and drydock, and

- the keel and side piers bases accelerate at the same
  rate as the drydock (ground).

The idealized model of the vessel-drydock system is shown

in Figure 4.3. In this system, vessel motion is restricted to rotation about the keel. The side piers are modelled as vertical due to typically small angles or inclination of the tops of the side piers. Only vertical displacements in the side piers are considered.

The one degree of freedom mathematical model predicts and analyzes vessel rotational response about its keel caused by seismic ground accelerations normal to the submarine's longitudinal axis. The resultant angle or rotation, expressed in radians, and side pier forces, generated by the rotation, are compared to applicable pier failure criteria found in Section 3, to see if the blocking arrangment will remain intacted.

### 4.2.2 One Degree of Freedom Equation of Motion Model

For the one degree of freedom case, the keel is the origin with clockwise rotation, $\theta$, positive. The simplified vessel-block system showing coordinate $\theta$ at rest and when excited are shown in Figures 4.3 and 4.4 respectively. The moment equilibrium equation about the keel (origin) is:

$$\Sigma M_k = I_k \ddot{\theta} + \overline{MKG}\ddot{x}_g - \overline{MKG}\ddot{y}_g \sin\theta$$

$$= B/2(F_{1sv} - F_{1dv}) - B/2(F_{2sv} + F_{2dv}) + \overline{WKG} \sin\theta \quad (4.2.1)$$

where  $I_k$ = Mass moment of inertia of vessel about the keel

$\qquad$ M = Vessel Mass

$F_{1sv}, F_{2sv}$ = static side block forces in the vertical direction (Figure 4.4)

$F_{1dv}, F_{2dv}$ = dynamic side block forces in the vertical

direction (Figure 4.4)

$W$ = vessel weight (Mg)

and $\ddot{x}_g, \ddot{y}_g$ = seismic ground accelerations in their respective directions

This equation can be simplified by the following:

1.) The left and right side block rows have the same vertical spring constant, $K_{sv}$, have the same static deflection and equal but opposite dynamic deflection due to symmetry, i.e.

$$F_{1sv} = F_{2sv} = F_{sv} \qquad (4.2.2)$$

and $|F_{1dv}| = |F_{2dv}| = F_{dv}.$ $\qquad (4.2.3)$

2.) The dynamic side block force, $F_{dv}$, as seen from Figure 4.5 equals to a force due to the modelled spring displacement plus a dissipative force due to system damping. In other words,

$$F_{dv}(\text{spring}) = (B/2)K_{sv} \sin\theta$$

and $F_{dv}(\text{dissipative}) = C(B/2)\dot{\theta}$

or when combined,

$$F_{dv} = B/2 \ (K_{sv} \sin\theta + C\dot{\theta}) \qquad (4.2.4)$$

where $K_{sv}$ = vertical spring constant of the side blocks

$C$ = vertical damping coefficient of the side blocks

Substituting Equations 4.2.2, 4.2.3, and 4.2.4 into Equation 4.2.1 and rearranging components yields

$$I_k\ddot{\theta} + (B^2/2)C\dot{\theta} + [(B^2/2)K_{sv} - W \overline{KG}] \sin\theta$$
$$= -MKG \ \ddot{x}_g + MKG \ \ddot{y}_g \sin\theta \qquad (4.2.5)$$

An additional simplification is that since $\theta$ is very small, $\sin\theta \approx \theta.$

The final simplification is that damping is expressed as a

fraction of critical damping. To do this, allow

$$(B^2/2)C = \xi \quad C_{cr} = 2\xi I_k \omega_n$$

where $\xi$ = viscous damping factor$\left(B^2C/2C_{cr}\right)$

$C_{cr}$ = critical damping coefficient = $2I_k \omega_n$

$\omega_n$ = system undamped natural frequency.

Now, Equation 4.2.5 simplified to

$$I_k \ddot{\theta} + 2\xi I_K \omega_n \dot{\theta} + [(B^2/2)K_{sv} - WKG]\theta$$

$$= -M\overline{KG}\,\ddot{x}_g + M\overline{KG}\,\ddot{y}_g\,\theta \qquad (4.2.6)$$

The non-linear term, $M\overline{KG}\,\ddot{y}_g\theta$, found in the equation of motion will be removed at this time to linearize Equation 4.2.6 since $\theta$ is assumed to be small. The effects of the non-linear term will be evaluated in Section 6 and 7.

The final form of the linearized one degree of freedom equation of motion is

$$m_1\ddot{\theta} + c_1\dot{\theta} + k_1\theta = -m_2\,\ddot{x}_g \qquad (4.2.7)$$

where $m_1 = I_k$

$c_1 = 2\xi\,I_k\omega_n$

$k_1 = (B^2/2)K_{sv} - W\,\overline{KG}$

$m_2 = M\,\overline{KG}.$

In matrix form,

$$\begin{bmatrix} o & m \\ m_1 & c_1 \end{bmatrix}\begin{bmatrix} \ddot{\theta} \\ \dot{\theta} \end{bmatrix} + \begin{bmatrix} -m_1 & o \\ o & k_1 \end{bmatrix}\begin{bmatrix} \dot{\theta} \\ \theta \end{bmatrix} = \begin{bmatrix} o \\ -m_2 & \ddot{x}_g \end{bmatrix}.$$

To simplify the explanation, the matrices will be redefined as

$$[\underline{A}]\{\dot{\underline{Y}}\} + [\underline{B}]\{\underline{Y}\} = \{\underline{E}(t)\} \qquad (4.2.8)$$

where

$$[\underline{A}] = \begin{bmatrix} o & m_1 \\ m_1 & c_1 \end{bmatrix} \qquad [\underline{B}] = \begin{bmatrix} -m_1 & o \\ o & k_1 \end{bmatrix}$$

$$\{\underline{y}\} = \begin{bmatrix} \dot{\theta} \\ \\ \theta \end{bmatrix} \qquad \{\underline{E}(t)\} = \begin{bmatrix} 0 \\ \\ -m_2 \quad \ddot{x}_g \end{bmatrix}.$$

Equations 4.2.6 and 4.2.8 will be solved in Sections 6 and 7.

### 4.3 Two Degree of Freedom: Rotational and Horizontal Translation Response

#### 4.3.1 Approach

This section develops a two degree of freedom mathematical model of a drydocked submarine. As in the case of the one degree of freedom (Section 4.2.1), the model assumptions still hold, i.e. a rigid cylindrical body, keel and side piers remain vertical, no slippage between the block cradle and drydock, and the bases of the keel and side piers accelerate at the same rate as the drydock (ground).

The idealized model of the vessel-drydock system is shown in Figure 4.6. In this system, vessel motion is restricted to rotation about the keel, and in horizontal transverse translation relative to the keel and side pier supports. The approach for determining vessel-drydock failue is identical to the one degree of freedom case except for the addition of sliding and tipping failure modes.

The two degree of freedom mathematical model predicts and analyzes submarine rotational and transitional response caused by seismic ground accelerations normal to the vessel's longitudinal axis. The rotational response is in radians, the translational response in inches, and both responses are expressed as a function of time. The keel and side pier forces are compared to applicable pier failure criteria found

-33-

in Section 3.

### 4.3.2  Two Degree of Freedom Equation of Motion Model

As in the one degree of freedom case, the keel is the origin for the two degree of freedom system with clockwise rotation, $\theta$, is positive.  The linear relative translation coordinate, x, is defined with respect to vessel and drydock translation relative to the ground.  Defining u as the position of the submarine keel relative to the ground, then the following relationships hold:

$$x = u - x_g$$

$$u = x + x_g$$

and $$\ddot{u} = \ddot{x} + \ddot{x}_g. \tag{4.3.1}$$

The simplified vessel-block system showing coordinates ($\theta$ and x) at rest and when excited are shown in Figures 4.6 and 4.7 respectively.

A balance of forces in the x direction, as shown in Figure 4.7, yields the first equation of motion

$$\Sigma F_x = M\ddot{u} + M\overline{KG}\,\ddot{\theta} = (F_{1sh} - F_{1dh}) - (F_{2sh} + F_{2dh})$$
$$- (F_{3sh} + F_{3dh}) \tag{4.3.2}$$

where $F_{1sh}$, $F_{2sh}$, $F_{3sh}$ = static block forces in the horizontal direction at their respective position

$F_{1dh}$, $F_{2dh}$, $F_{3dh}$ = dynamic block forces in the horizontal direction at their respective position.

The above equation can be simplified by the following:

1)  The left and right side block rows have the same horizontal spring constant, $K_{sh}$, have equal but opposite static horizontal deflection and the same dynamic horizontal

-34-

deflection due to symmetry, i.e.,

$$F_{1sh} + F_{2sh} = 0$$

$$F_{1dh} = F_{2dh} \cdot \qquad (4.3.3)$$

Also, the keel block rows do not experience any net static
horizontal deflection since the inclination angle of the block
cap is zero. Hence

$$F_{3sh} = 0. \qquad (4.3.4)$$

2) The dynamic block forces, $F_{dh}$ as seen from Figure 4.7
equals to a force due to the modelled springs plus a
dissipative force due to system damping. In other words

$$F_{dh} \text{ (spring)} = F_{1dh} \text{ (spring)} + F_{2dh}\text{(spring)} + F_{3dh} \text{ (spring)}$$

$$= K_{sh}x + K_{sh} \; x + K_{kh}x$$

$$F_{dh} \text{ (spring)} = (2K_{sh} + K_{kh})x$$

Likewise

$$F_{dh} \text{ (dissipative)} = C_x \dot{x}$$

so

$$F_{dh} = (2K_{hs} + K_{hk})x + C_x \dot{x} \qquad (4.3.5)$$

where $K_{sh}$ = side pier stiffness

$K_{kh}$ = keel pier stiffness

$C_x$ = system horizontal damping coefficient.

Substituting Equations 4.3.1, 4.3.3, 4.3.4, and 4.3.5
into Equation 4.3.2 and rearranging components yields

$$m_{11} \; \ddot{x} + m_{12} \; \ddot{\theta} + c_1 \; \dot{x} + k_{11} \; x = -m_{11} \; \ddot{x}_g \qquad (4.3.6)$$

where $m_{11} = M$

$m_{12} = M \; \overline{KG}$

$c_1 = C_x$ = system horizontal damping coefficient

$k_{11} = (2K_{sh} + K_{kh})$ = system horizontal stiffness

Summing the moments about the origin in a similar fashion

-35-

as the previous degree of freedom case, as shown in Figure 4.7, yields the second equation of motion,

$$\Sigma M_K = I_k \ddot{\theta} + M\overline{KG}\,\ddot{u} - M\overline{KG}\,\ddot{y}_g \sin\theta$$

$$= B/2(F_{1sv} - F_{1dv}) - B/2(F_{2sv} + F_{2dv}) + W\overline{KG}\sin\theta \quad (4.3.7)$$

The second equation can be reduced as it was in the one degree of freedom case to

$$I_k \ddot{\theta} + M\overline{KG}\,\ddot{x} + C_\theta \dot{\theta} + (B^2/2\,K_{sv} - W\overline{KG})\theta$$
$$= MKG\,\ddot{x}_g + MKG\,\ddot{y}_g\theta. \quad (4.3.8)$$

Once again, the non-linear term, $M\overline{KG}\,y_g\,\theta$, found in Equation 4.3.8 will be removed leaving a linearized equation since $\theta$ is assumed to be small. The effects of the nonlinear term will be evaluated in Sections 6 and 7.

Now the system of equations for the two degree of freedom vessel-drydock system is as follows,

$$m_{11}\ddot{x} + m_{12}\ddot{\theta} + c_{11}\dot{x} + k_{11}x = -m_{11}\ddot{x}_g \quad (4.3.9a)$$

and

$$m_{22}\ddot{\theta} + m_{21}\ddot{x} + c_{12}\dot{\theta} + k_{22}\theta = -m_{21}\ddot{x}_g \quad (4.3.9b)$$

where    $m_{11} = M$

$m_{21} = m_{12} = M\overline{KG}$

$m_{22} = I_k$

$c_1$ = system horizontal damping coefficient

$c_2$ = system rotational damping coefficient

$k_{11} = 2K_{sh} + K_{kh}$

$k_{22} = B^2/2\,K_{sv} - W\overline{KG}$.

These two equations of motion are coupled in the mass times

acceleration term, which is known as inertial coupling. Also the equations are coupled in the damping term, because the system's two natural modes have translation and rotation involved in them. This model uses 5 percent of the critical damping coefficient as system damping. To evaluate damping, a modal analysis for the system is performed. This analysis is performed in Appendix 3. Substituting damping coefficients into Equations 4.3.9a and 4.3.9b, the equations of motion can be expressed in matrix notation as Equation 4.3.10:

$$[\underline{M}] \{\underline{\ddot{y}'}\} + [\underline{C}] \{\underline{\dot{y}'}\} + [\underline{K}] \{\underline{y'}\} = \{E'(t)\} \quad (4.3.10)$$

where

$$\{\underline{y'}\} = \text{Response Vector} = \begin{Bmatrix} x \\ \theta \end{Bmatrix}$$

$$[\underline{M}] = \text{Mass Matrix} = \begin{bmatrix} m_{11} & m_{12} \\ m_{21} & m_{22} \end{bmatrix}$$

$$[\underline{C}] = \text{Damping Matrix} = \begin{bmatrix} c_{11} & c_{12} \\ c_{21} & c_{22} \end{bmatrix}$$

$$[\underline{K}] = \text{Stiffness Matrix} = \begin{bmatrix} k_{11} & 0 \\ 0 & k_{22} \end{bmatrix}$$

$$\{E'(t)\} = \text{Seismic Forcing Vector} = \begin{Bmatrix} -m_{11} \ddot{x}_g \\ -m_{21} \ddot{x}_g \end{Bmatrix} .$$

To simplify the explanation, the matrices will be redefined as

$$[\underline{A}] \{\underline{\dot{y}}\} + [\underline{B}] \{\underline{y}\} = \{\underline{E}(t)\} \quad (4.3.11)$$

where

$$[\underline{A}] = \begin{bmatrix} 0 & [\underline{M}] \\ [\underline{M}] & [\underline{C}] \end{bmatrix}$$

$$[\underline{B}] = \begin{bmatrix} -[\underline{M}] & O \\ O & [\underline{K}] \end{bmatrix}$$

$$\{y\} = \begin{Bmatrix} \{\underline{y}'\} \\ \\ \{\underline{y}'\} \end{Bmatrix}$$

$$\{\underline{E}(t)\} = \begin{Bmatrix} O \\ \{E'(t)\} \end{Bmatrix}.$$

Equations 4.3.6, 4.3.8, and 4.3.11 will be solved in Sections 6 and 7.

### 4.4  Three Degree of Freedom:  Rotational, Horizontal, and Vertical Translation Response

#### 4.4.1  Approach

This section develops a three degree of freedom mathematical model of a drydocked submarine.  The idealized model of the vessel-drydock system is shown in Figure 4.8.  In this system, vessel motion is restricted to rotation about the keel, and in horizontal transverse and vertical translations relative to the keel and side pier supports.  The approach for determining vessel-drydock failure is identical to the two degree of freedom case.

The three degree of freedom mathematical model predicts and analyzes submarine rotational, horizontal and vertical

-38-

transitional responses caused by seismic ground accelerations normal to the vessel's longitudinal axis. The rotational response is in radians, the translational response in inches, and all three responses are expressed as a function of time. The keel and side pier forces generated by the responses are compared to applicable pier failure criteria found in section 3 to check blocking stability.

### 4.4.2 Three Degree of Freedom Equation of Motion Model

As in the two degree of freedom case, the keel is the origin for the three degree of freedom system with absolute rotation, $\theta$, and translation coordinate, x, is the horizontal vessel motion relative to the drydock. The linear relative translation coordinate, y, is defined with respect to vessel and drydock translation relative to the ground. This coordinate y describes the vertical motion of the vessel hull relative to the drydock and the drydock blocks. Defining v as the position of the submarine keel relative to the ground, then the following relationships hold;

$$y = v - y_g$$
$$v = y + y_g$$

and

$$\ddot{v} = \ddot{y} + \ddot{y}_g \qquad (4.4.1)$$

Likewise,

$$\ddot{u} = \ddot{x} + \ddot{x}_g \qquad (4.4.2)$$

The simplified vessel-block system showing coordinates (x, y and $\theta$) at rest and when excited are shown in Figure 4.8 and 4.9 respectively.

As developed in Section 4.3.2, the first and third equations of motion in the three degree of freedom model are

$$M\ddot{x} + M\overline{KG}\ddot{\theta} + C_x\dot{x} + (2K_{sh} + K_{kh})\ddot{x} = -M\ddot{x}_g \qquad (4.4.3)$$

-39-

and

$$I_k \ddot{\theta} + M\overline{KG}\ddot{x} - M\overline{KG}\ddot{y}\theta + C\dot{\theta}$$
$$+ [(B^2/2)K_{sv} - W\overline{KG}]\theta = -M\overline{KG}\ddot{x}_g + M\overline{KG}\ddot{y}_g\theta . \qquad (4.4.4)$$

A balance of forces in the y direction, as shown in Figure 4.9, yields the second equation of motion

$$\Sigma F_y = M\ddot{v} = (F_{1sv} - F_{1dv}) + (F_{2sv} - F_{2dv})$$
$$+ (F_{3sv} - F_{3dv}) - W. \qquad (4.4.5)$$

The above equations can be simplified by the following:

1) The vessel weight, W, must be equal to the summation of static block forces so that static equilibrium holds true, i.e.

$$F_{1sv} + F_{2sv} + F_{3sv} = W \qquad (4.4.6)$$

2) The dynamic block forces, $F_{dv}$, as seen from Figure 4.9 equals to a force due to the modelled springs plus a dissipative force due to system damping. These dynamic block forces are only a function of vertical displacement, y, and velocity, $\dot{y}$. The formulation of these forces is identical to the procedure used in Section 4.3.2 and will not be repeated. The final form of the dynamic block forces, $F_{dv}$, is

$$F_{dv} = (2K_{sv} + K_{kv})y + C_y\dot{y} \qquad (4.4.7)$$

where  $K_{sv}$ = side pier vertical stiffness

$K_{kv}$ = keel pier vertical stiffness

$C_y$ =  system vertical damping coefficient.

Substituting Equations 4.4.1, 4.4.2, 4.4.6 and 4.4.7 into Equation 4.4.5 and rearranging components yields

$$M\ddot{y} + C_y\dot{y} + (2K_{sv} + K_{kv})y = -M\ddot{y}_g. \qquad (4.4.8)$$

The above equation along with Equations 4.4.3 and 4.4.4

-40-

formulate the three equations of motion for the three degree of freedom model.

The non-linear terms, $M\overline{KG}\ddot{y}\theta$ and $M\overline{KG}\ddot{y}_g\theta$, found in Equation 4.4.4 will be removed at this time leaving a linearized equation since $\theta$ is assumed to be small.  The effects of the non-linear terms will be evaluated in Section 6 and 7.

Now the system of equations for the three degree of freedom is as follows;

$$m_{11}\ddot{x} + m_{13}\ddot{\theta} + c_1\dot{x} + k_{11}x = -m_{11}\ddot{x}_g \qquad (4.4.9a)$$

$$m_{22}\ddot{y} + c_2\dot{y} + k_{22}y = -m_{22}\ddot{y}_g \qquad (4.4.9b)$$

$$m_{33}\ddot{\theta} + m_{31}\ddot{x} + c_3\dot{\theta} + k_{33}\theta = -m_{31}\ddot{x}_g \qquad (4.4.9c)$$

where  $m_{11} = m_{22} = M$

$m_{13} = m_{31} = M\overline{KG}$

$m_{33} = I_k$

$c_1$ = system horizontal damping coefficient

$c_2$ = system vertical damping coefficient

$c_3$ = system rotational damping coefficient

$k_{11} = 2K_{sh} + K_{kh}$

$k_{22} = 2K_{sv} + K_{kv}$

$k_{33} = B^2/2\ K_{sv} - W\overline{KG}.$

The first and third equations of motions, Equations 4.4.11a and 4.4.11c, respectively, are coupled in the mass times acceleration term, which is known as inertial coupling.  Also, these equations are coupled in the damping term because two of the system's three natural modes have horizontal translation and rotation involved in them.  The second equation of motion, Equation 4.4.11b, is uncoupled from the rest of equations.

Hence, the last natural mode of the system only depends on
vertical translation.

In order to introduce damping, this model uses 5 percent
of the critical damping coefficient as system damping.  To
evaluate damping, a modal analysis for the system in question
must be performed.  This analysis is performed in Appendix 3 .
System damping coefficients can be found using this modal
anlaysis technique, but for now, the coefficients will be left
in terms of $c_{11}$, $c_{13}$, $c_{22}$, $c_{31}$ and $c_{33}$.  Substituting these
coefficients into Equations 4.4.11a, 4.4.11b, and 4.4.11c, the
equations of motion can be expressed in matrix notation as
Equation 4.4.12:

$$[\underline{M}]\ \{\ddot{\underline{y}}'\} + [\underline{C}]\ \{\dot{\underline{y}}'\} + [\underline{K}]\ \{\underline{y}'\} = \{\underline{E}'(t)\} \quad (4.4.10)$$

where

$$\{y'\} \quad = \text{Response Vector} = \begin{Bmatrix} x \\ y \\ \theta \end{Bmatrix}$$

$$[\underline{M}] \quad = \text{Mass Matrix} = \begin{bmatrix} m_{11} & 0 & m_{13} \\ 0 & m_{22} & 0 \\ m_{31} & 0 & m_{33} \end{bmatrix}$$

$$[\underline{K}] \quad = \text{Stiffness Matrix} = \begin{bmatrix} k_{11} & 0 & 0 \\ 0 & k_{22} & 0 \\ 0 & 0 & k_{33} \end{bmatrix}$$

$$\{E'(t)\} = \text{Seismic Forcing Vector} = \begin{Bmatrix} -m_{11}\ \ddot{x}_g \\ -m_{22}\ \ddot{y}_g \\ -m_{31}\ \ddot{x}_g \end{Bmatrix}$$

$$[\underline{C}] \quad = \text{Damping Matrix} = \begin{bmatrix} c_{11} & 0 & c_{13} \\ 0 & c_{22} & 0 \\ c_{31} & 0 & c_{33} \end{bmatrix}$$

-42-

To simplify the explanation the matrices will be redefined as

$$[\underline{A}] \ \{\dot{\underline{Y}}\} + [\underline{B}] \ \{\underline{Y}\} = \{\underline{E}(t)\} \qquad\qquad (4.4.11)$$

where

$$[A] = \begin{bmatrix} O & [\underline{M}] \\ \\ [\underline{M}] & [\underline{C}] \end{bmatrix}$$

$$[\underline{B}] = \begin{bmatrix} -[\underline{M}] & O \\ \\ O & [\underline{K}] \end{bmatrix}$$

$$\{\underline{Y}\} = \begin{Bmatrix} \{\dot{\underline{Y}}'\} \\ \\ \{\underline{Y}'\} \end{Bmatrix}$$

$$\{\underline{E}(t)\} = \begin{Bmatrix} O \\ \\ \{E'(t)\} \end{Bmatrix}$$

Equations 4.4.3, 4.4.4, 4.4.8, and 4.4.11 will be solved in Section 6 and 7.
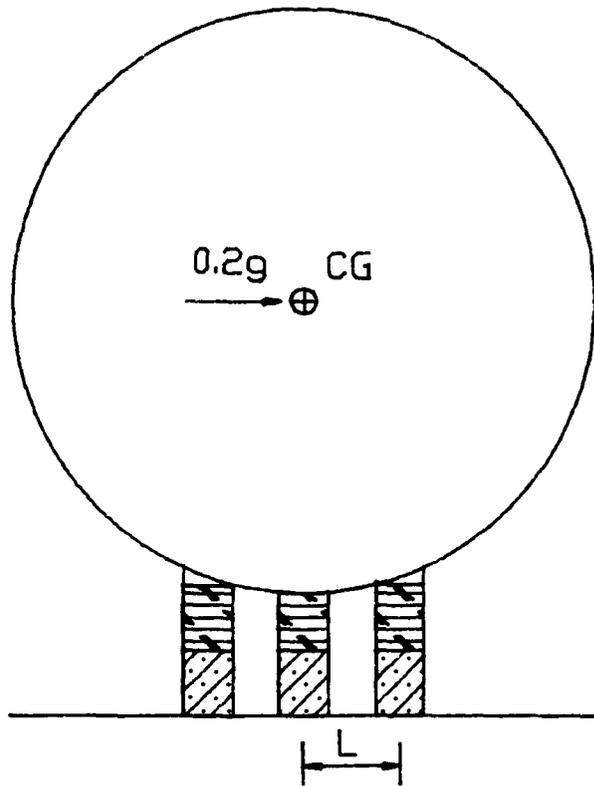
FIGURE 4.1
Vessel-Drydock System with Applied Quasi- static Force
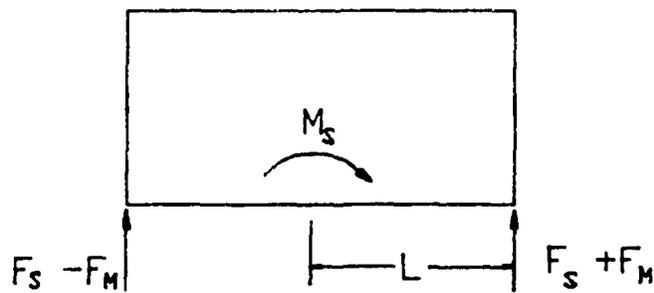


FIGURE 4.2
Vessel-Drydock System Force Diagram with Applied Quasi-static
Force
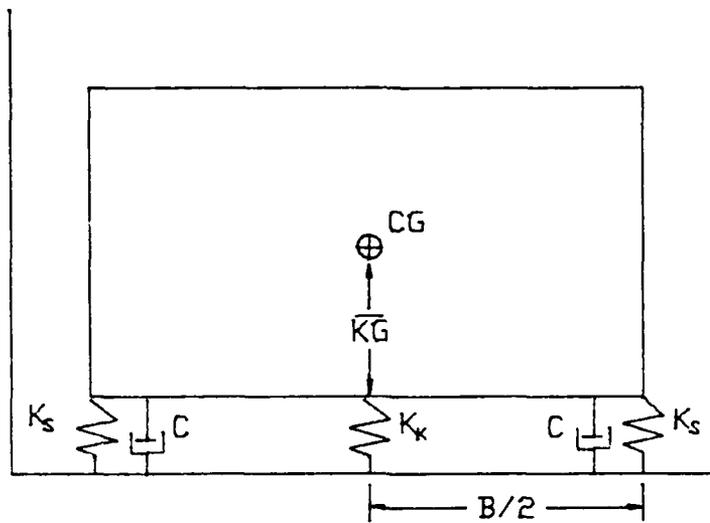
**FIGURE 4.3**
Idealized One Degree of Freedom Vessel- Drydock System at Rest
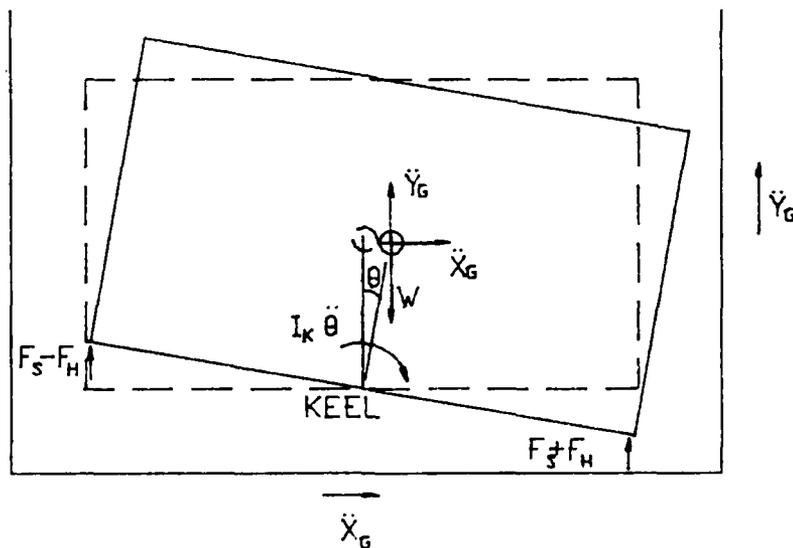


**FIGURE 4.4**
Idealized One Degree of Freedom Vessel- Drydock System,
Excited
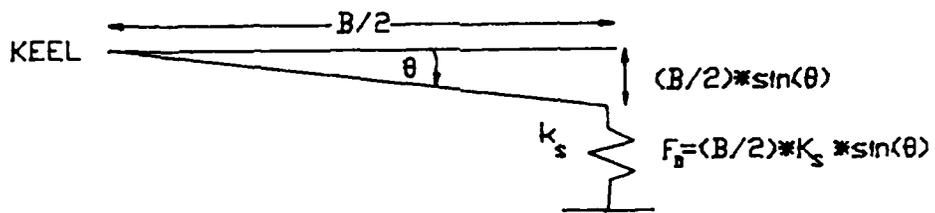
FIGURE 4.5
Dynamic Side Block Force
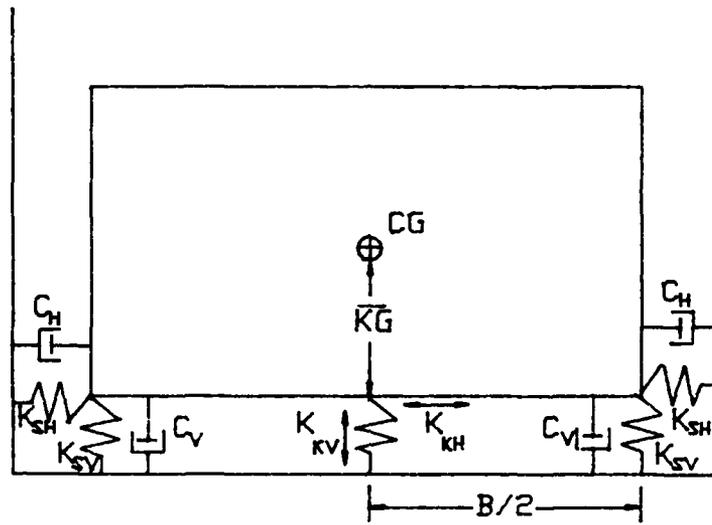
FIGURE 4.6
Idealized Two Degree of Freedom Vessel-Drydock System at Rest
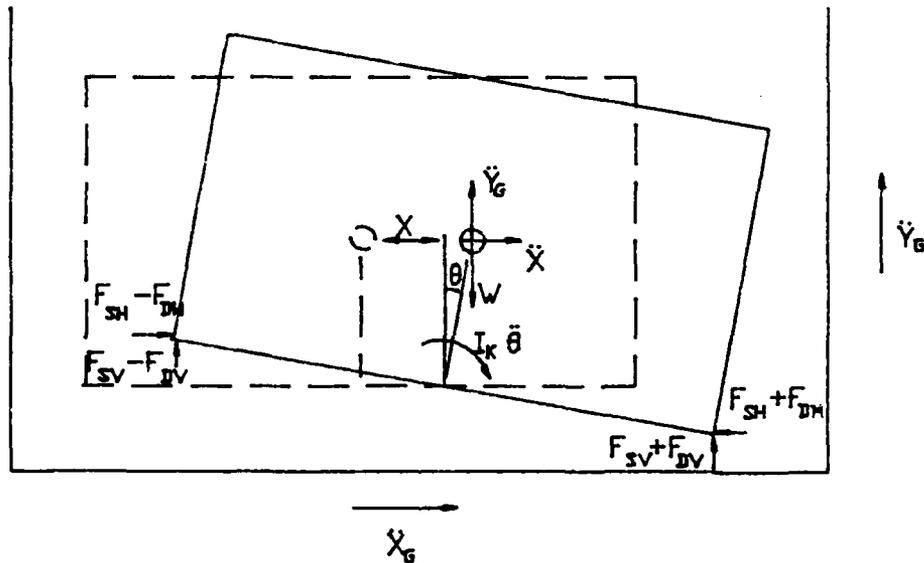


FIGURE 4.7
Idealized Two Degree of Freedom Vessel-Drydock System,
Excited

47
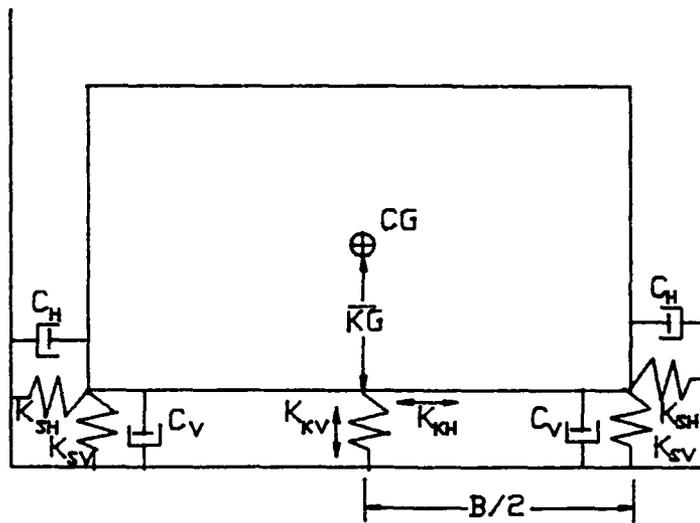
FIGURE 4.8
Idealized Three Degree of Freedom Vessel-Drydock System at
Rest
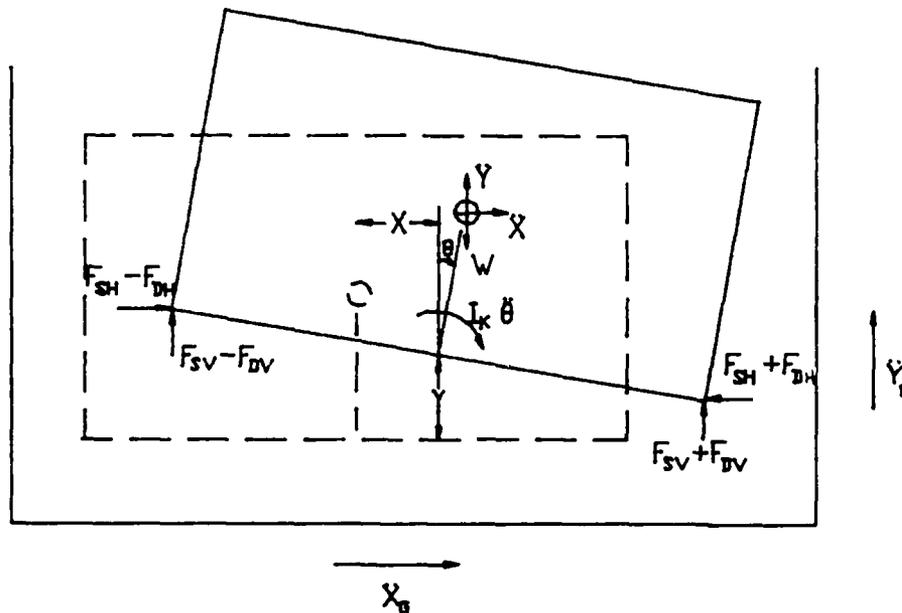


FIGURE 4.9
Idealized Three Degree of Freedom Vessel-Drydock System,
Excited

-48-

## 5.0 SYSTEM PARAMETERS

In order to study the response of a vessel-drydock system to seismic loading, eleven typical configurations have been selected for implementation into the one, two and three degrees of freedom models developed in the previous section. This section explores these eleven systems along with the modeling of the pier blocks for stiffness.

### 5.1 Vessel-Drydock System Parameters

Eleven drydock system configurations have been chosen for analysis and are defined in Table 5.1. The vessel-drydock parameters, corresponding to each system, were taken from the appropriate NAVSEA drawings.

TABLE 5.1

Vessel-Drydock Configurations

| System | Hull | Block Type | Longitudinal Block Spring | NAVSEA Drawing |
|--------|------|-----------|---------------------------|----------------|
| 1 | 616 | Composite | 8 ft | 845-2006640 |
| 2 | 616 | Composite | 16 ft | 845-2006640 |
| 3 | 616 | Timber | 8 ft | 845-2006640 |
| 4 | 616 | Timber | 16 ft | 845-2006640 |
| 5 | 616 | Timber Side/ Concrete Keel | 16 ft | 845-2006640 |
| 6 | 726 | Composite | 8 ft | 845-4862749 |
| 7 | 726 | Composite | 12 ft | 845-4862749 |
| 8 | 726 | Composite | 16 ft | 845-4862749 |
| 9 | 688 | Composite/Timber | 12 ft | 845-4403511 |
| 10 | 637 | Composite/Timber | 12 ft | 845-2140554 |
| 11 | 637 | Composite/Timber | 12 ft | 845-2140554 |

Table 5.2 lists the vessel radii, weight, distance from center of gravity to keel, KG, moments of inertia about vessel center of gravity, $I_{c.g.}$ and keel, $I_k$, and side block transverse spacing, B.

TABLE 5.2

Key Vessel Parameters

| SYSTEM | Hull Radius (inches) | Weight (Kips) | KG (inches) | $I_{cg}$ (K-in-sec$^2$) | $I_k$ (K-in-sec$^2$) | B (inches) |
|--------|----------------------|---------------|-------------|-------------------------|----------------------|------------|
| 1-5    | 198                  | 16,396        | 193         | 831,257                 | 2,411,000            | 144        |
| 6-8    | 252                  | 37,656        | 223         | 3,097,535               | 7,949,000            | 180        |
| 9      | 198                  | 13,624        | 193         | 691,852                 | 2,007,000            | 138        |
| 10-11  | 190                  | 9,529         | 174         | 445,592                 | 1,193,000            | 138        |

## 5.2  Block Parameters[11]

The models developed in Section 4 require the evaluation of the block's vertical and horizontal spring stiffness constants, $K_v$ and $K_h$. The spring stiffness is the amount of force required to produce one unit of displacement in the respective direction. In order to facilitate the use of Hooke's law in evaluating spring constants, the assumption of homogeneous isotropic behavior will be used for the block materials: wood and concrete. Both the side and keel piers must be analyzed for $K_v$ and $K_h$.

### 5.2.1  Vertical Stiffness $K_v$[11]

Using Hooke's Law, the linear relationship between vertical applied force and deformation can be written as

$$\frac{F}{A} = \frac{Eh}{H}$$

where  F = vertical force

A = area under applied force

E = modulus of elasticity

h = change in height

H = original height.

Hence, the spring constant for a given material is

$$k_v = \frac{F}{h} = \frac{EA}{H} \; .$$

(5.1)

For the eleven drydock configurations, two types of standard blocks (composite and timber) are used. A standard composite block which is composed of a softwood cap, a hardwood middle portion, and a concrete bottom can be modelled as a series of three springs (Figure 5.1). The resultant block spring stiffness is

$$k_{v \; block} = [(1/k_{cap}) + (1/k_{oak}) + (1/k_{con})]^{-1}$$
(5.2)

where

$k_{cap}$ = softwood cap spring constant

$k_{oak}$ = hardwood middle spring constant

$k_{con}$ = concrete bottom spring constant.

All three constants listed above are calculated from Equation 5.1. A standard timber block is composed of a softwood cap and a hardwood body (Figure 5.2). Its block spring constant is

$$k_{v \; block} = [(1/k_{cap}) + (1/k_{oak})]^{-1}.$$
(5.3)

The total vertical stiffness for a drydock configuration can be computed by multiplying $k_{v \; block}$ times the number of blocks. The keel pier has a total vetical stiffness of

-51-

$$K_{kv} = k_v \text{ block} * n_k$$

and for the side pier

$$K_{sv} = k_v \text{ block} * n_s$$

whre $n_k$ and $n_s$ are the number of blocks in one row for their respective pier.

The values of total vertical stiffness for both keel and side blocks of the eleven drydock configurations are found in Table 5.4. The following parameters are used in the formulation of Table 5.4:

$A$ = cross-sectional area of softwood cap

$E_{cap}$ = 22.5 ksi

$E_{oak}$ = 31.675 ksi

$E_{con}$ = 2,000 ksi

$H_{cap}$ = 4 inches

$H_{oak}$ = 29 inches for composite block

   = 56 inches for timber block

$H_{con}$ = 27 inches.

### 5.2.2 Horizontal Stiffness $K_h$ [11]

In order to determine the horizontal stiffness, two types of deformation must be looked at. They are the block-cap displacements due to bending and shear deformations. Modelling as a continuous cantilever beam subjected to a concentrated lateral force at the cap surface (Figure 5.3), the bending displacement due to the applied force P of a composite block is

$$d_B = \frac{P(H_1 + H_2 + H_3)}{3E_1 I} + \frac{P(E_1 - E_2)(H_2 + H_3)}{3E_1 E_2 I}$$

-52-

$$+ \quad \frac{P(E_2 I - E_3 I_3) H_3}{3E_2 E_3 I I_3} \tag{5.4}$$

where $H_1$ = height of concrete (27 inches)

$H_2$ = height of hardwood (29 inches)

$H_3$ = height of softwood cap (4 inches)

$E_1$ = modulus of elasticity of concrete

$E_2$ = modulus of elasticity of hardwood

$E_3$ = modulus of elasticity of softwood cap

$I$ = moment of inertia of block's cross-section

$I_3$ = moment of inertia of cap's cross-section.

For the bending displacement of a timber block, Equation 5.4 still holds true with the alterations:

$H_1$ = height of hardwood (27 inches)

$E_1$ = modulus of elasticity of hardwood.

In shear, deformation can be determined by modelling the composite block as an element subjected to shear stress at the top (Figure 5.4). The shear displacement becomes

$$d_s = \frac{(1+\nu_{con}) P H_1}{AE} + \frac{2(1+\nu_{wood}) P H_2}{AE_2}$$

$$+ \frac{2(1+\nu_{wood}) P H_3}{AE_3}$$

$$\tag{5.5}$$

where $A$ = area of cap's cross section

$\nu_{wood}$ = Poisson's ratio for wood (0.30 is used)

$\nu_{con}$ = Poisson's ratio for concrete (0.15 is used).

By redefining $H_1$ and $E_1$, Equation 5.5 yields the shear displacement of a timber block.

The horizontal spring constant of any one block can be determined through the Hooke's Law relation

$$k_h = P/(d_B + d_S) \tag{5.6}$$

The total horizontal stiffnesses for the keel and side piers are

$$K_{kh} = k_h * n_k$$

and $K_{sh} = k_h * n_s$ .

The values for the total area of the rows of blocks for each of the eleven systems are listed in Table 5.3. Also listed are the corresponding total area of the cap blocks for a row of side or keel blocks. The values of total horizontal and vertical stiffnesses of the keel and side piers for the eleven drydock configurations are listed in Table 5.4.

TABLE 5.3

Keel Pier Cross-Sectional Area Analysis

| Systems | Cap Width (ins) | Cap Depth (ins) | Cap Area (in²) | Number of Keel | Total Cap Area (in²) | Block Width (ins) | Block Depth (ins) | Block Area (in²) | Number of Keel | Total Block Area (in²) | Cap Height (ins) | Wood Height (ins) | Cement Heitht (ins) | Block Height (ins) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 24 | 42 | 1008 | 55 | 55440 | 48 | 42 | 2016 | 55 | 110880 | 4 | 29 | 27 | 60 |
| 2 | 24 | 42 | 1008 | 55 | 55440 | 48 | 42 | 2016 | 55 | 110880 | 4 | 29 | 27 | 60 |
| 3 | 24 | 42 | 1008 | 55 | 55440 | 48 | 42 | 2016 | 55 | 110880 | 4 | 56 | 0 | 60 |
| 4 | 24 | 42 | 1008 | 55 | 55440 | 48 | 42 | 2016 | 55 | 110880 | 4 | 56 | 0 | 60 |
| 5 | 24 | 42 | 1008 | 55 | 55440 | 48 | 42 | 2016 | 55 | 110880 | 4 | 29 | 27 | 60 |
| 6 | 36 | 42 | 1512 | 72 | 108864 | 48 | 42 | 2016 | 72 | 145152 | 4 | 29 | 27 | 60 |
| 7 | 36 | 42 | 1512 | 72 | 108864 | 60 | 42 | 2520 | 72 | 181440 | 4 | 29 | 27 | 60 |
| 8 | 36 | 42 | 1512 | 72 | 108864 | 60 | 42 | 2520 | 72 | 181440 | 4 | 29 | 27 | 60 |
| 9 | 24 | 42 | 1008 | 42 | 42336 | 60 | 42 | 2520 | 42 | 105840 | 4 | 56 | 0 | 60 |
| 10 | 24 | 42 | 1008 | 30 | 30240 | 48 | 42 | 2016 | 30 | 60480 | | | | |
|  | 12 | 42 | 504 | 4 | 2016 | 48 | 42 | 2016 | 4 | 8064 | | | | |
|  |  |  |  |  | 32256 |  |  |  |  | 68544 | 4 | 56 | 0 | 60 |
| 11 | 24 | 42 | 1008 | 30 | 30240 | 48 | 42 | 2016 | 30 | 60480 | | | | |
|  | 12 | 42 | 504 | 4 | 2016 | 48 | 42 | 2016 | 4 | 8064 | | | | |
|  |  |  |  |  | 32256 |  |  |  |  | 68544 | 4 | 56 | 0 | 60 |

TABLE 5.3 (continued)

Side Pier Cross-Sectional Area Analysis

| Systems | Cap Width (ins) | Cap Depth (ins) | Cap Area (in²) | Number of Keel | Cap Area (in²) | Block Width (ins) | Block Depth (ins) | Block Area (in²) | Number of Keel | Block Area (in²) | Cap Height (ins) | Wood Height (ins) | Cement Height (ins) | Block Height (ins) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 24 | 12 | 288 | 29 | 8532 | 48 | 42 | 2016 | 29 | 58464 | 4 | 29 | 27 | 60 |
| 2 | 24 | 12 | 288 | 15 | 4320 | 48 | 42 | 2016 | 15 | 30240 | 4 | 29 | 27 | 60 |
| 3 | 24 | 12 | 288 | 29 | 8352 | 48 | 42 | 2016 | 29 | 58464 | 4 | 56 | 0 | 60 |
| 4 | 24 | 12 | 288 | 15 | 4320 | 48 | 42 | 2016 | 15 | 30240 | 4 | 56 | 0 | 60 |
| 5 | 24 | 12 | 288 | 15 | 4320 | 48 | 42 | 2016 | 15 | 30240 | 4 | 56 | 0 | 60 |
| 6 | 36 | 36 | 1296 | 44.5 | 57672 | 48 | 42 | 2016 | 44.5 | 89712 | 4 | 29 | 27 | 60 |
| 7 | 36 | 36 | 1296 | 29.5 | 38232 | 60 | 42 | 2520 | 29.5 | 74340 | 4 | 29 | 27 | 60 |
| 8 | 36 | 36 | 1296 | 22.5 | 29160 | 60 | 42 | 2520 | 22.5 | 56700 | 4 | 29 | 27 | 60 |
| 9 | 24 | 20 | 480 | 19 | 9120 | 60 | 42 | 2520 | 19 | 47880 | 4 | 29 | 27 | 60 |
| 10 | 24 | 24 | 576 | 13 | 7488 | 48 | 42 | 2016 | 13 | 26208 | 4 | 29 | 27 | 60 |
| 11 | 24 | 24 | 576 | 10.5 | 6048 | 48 | 42 | 2016 | 10.5 | 21168 | 4 | 29 | 27 | 60 |

# TABLE 5.4

## Total Keel and Side Pier Stiffness in Pounds Per Inch

| System | $K_{kv}$ | $K_{sv}$ | $K_{kh}$ | $K_{sh}$ |
|---|---|---|---|---|
| 1 | 50089159 | 7545899. | 14018741 | 2612721 |
| 2 | 50089159 | 3903051. | 14018741 | 1351407. |
| 3 | 28493109 | 4292468. | 5161684. | 1282216. |
| 4 | 28493109 | 2220242. | 5161684. | 663215.3 |
| 5 | 50089159 | 2220242. | 14018741. | 663215.3 |
| 6 | 98356895 | 52105736 | 24330635 | 16104611 |
| 7 | 98356895 | 34542004 | 24330635 | 10676090 |
| 8 | 98356895 | 26345596 | 24330635 | 8142780. |
| 9 | 21758374 | 8239775. | 3941650. | 2683291. |
| 10 | 16577809 | 6765289. | 3072572. | 2139500. |
| 11 | 16577809 | 5464271. | 3072572. | 1728057. |
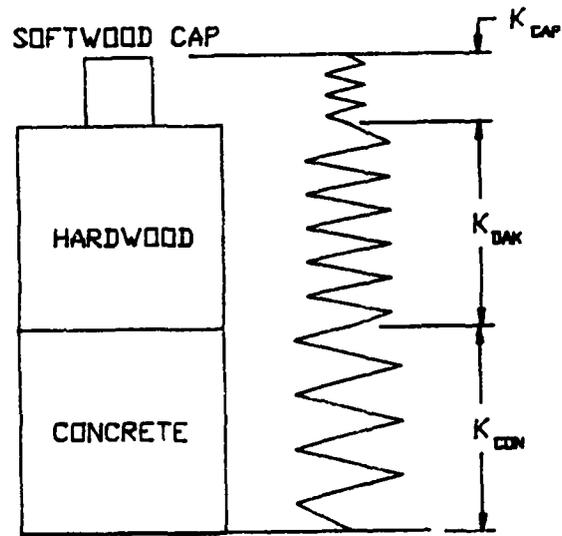
FIGURE 5.1
Standard Composite Block Stiffness Model
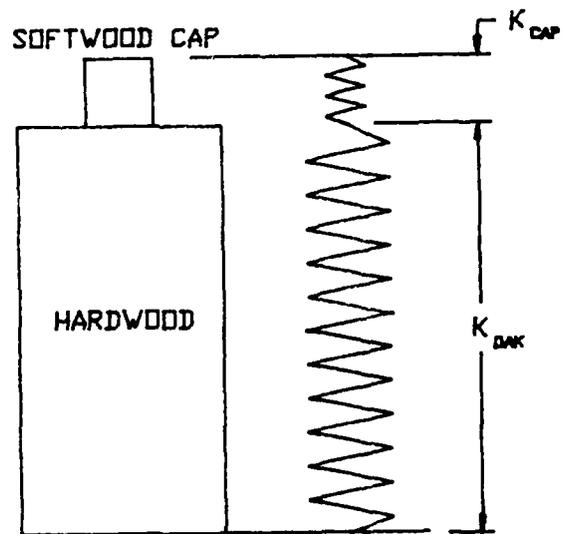


FIGURE 5.2
Standard Timber Block Stiffness Model
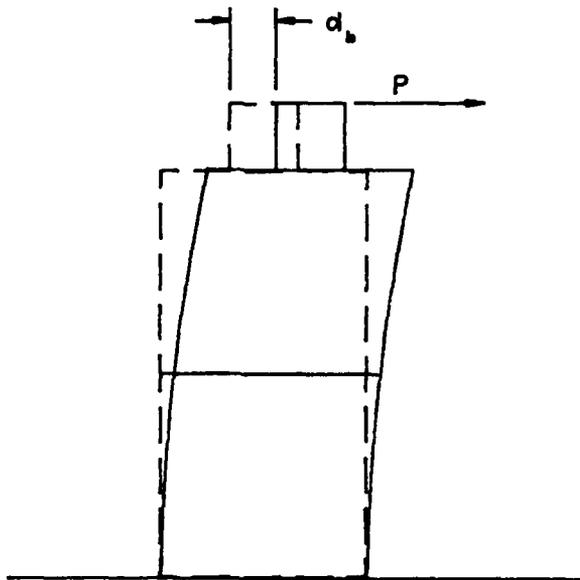
FIGURE 5.3
Standard Block in Bending
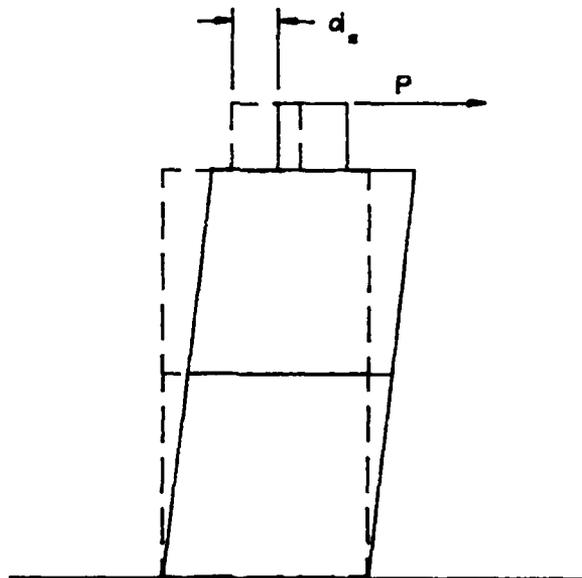


FIGURE 5.4
Standard Block in Shear

## 6.0 VESSEL RESPONSE TO SEISMIC EXCITATION

This portion of the thesis discusses methods of determining the seismic response of the vessel-drydock system mathematical models developed in Section 4. The numerical analysis schemes to be implemented are a modal analysis method (Section 6.1) which looks at the linearized equations of motion, and a fourth order Runge-Kutta numerical method (Section 6.2) which analyzes the non-linear aspect and also verifies the linear solution. Section 6.3 incorporates a response spectrum analysis to solve the mathematical models. Finally, Section 6.4 generates system response for the eleven vessel-drydock configurations using the quasi-static force method.

### 6.1 Vessel Response Using Modal Analysis

In order to use the modal analysis method described herein, only the linearized equations of motion mathematical models can be evaluated. These are Equations 4.2.8, 4.3.11 and 4.4.11 which correspond to the one, two, and three degree of freedom models respectively. Since all three linearized equations are in the form

$$[\underline{A}]\{\dot{\underline{Y}}\} + [\underline{B}]\{\underline{Y}\} = \{\underline{E}(t)\},$$

the three degree of freedom model will be analyzed. The other two cases are just a reduced version of the third.

To solve the linearized three degree of freedom equations of motion (4.4.11) in matrix notation and obtain system responses as a function of time, the problem is solved as an eigenvalue problem with a procedure described in reference [13]. As a first step, the equations are decoupled.

To accomplish this, first consider the free vibration problem

$$[\underline{A}]\{\dot{Y}\} + [\underline{B}]\{Y\} = 0 \qquad (6.1.1)$$

Assuming Equation 6.1.1 has a solution in the form

$$\{Y\} = \{\psi\}\, e^{\lambda t} ,$$

Equation 6.1.1 can be expressed as

$$\lambda[\underline{A}]\{\psi\} + [\underline{B}]\{\psi\} = 0. \qquad (6.1.2)$$

where $\lambda$ = complex eigenvalues

$\{\psi\}$ = modal vectors.

Solving the matrix determinant problem

$$|\lambda[\underline{A}] + [\underline{B}]| = 0 \qquad (6.1.3)$$

yields the eigenvalues. In the three degree of freedom case, [$\underline{A}$] and [$\underline{B}$] are 6 x 6 matrices hence the solution of Equation 6.1.3 will yield 6 eigenvalues. These eigenvalues will be comprised of three sets of complex conjugates. Now the modal vectors can be found by substituting the eigenvalues back into Equation 6.1.2 and solving. The modal vectors are then combined to form the modal matrix [$\psi$] where

$$[\psi] = [\{\psi\}_1 \ \{\psi\}_2 \ \{\psi\}_3 \ \{\psi\}_4 \ \{\psi\}_5 \ \{\psi\}_6].$$

The equations of motion can then be decoupled by using the modal matrix, i.e.

$$[\psi]^T [\underline{A}][\psi] = [\diagdown A \diagdown]$$

and

$$[\psi]^T [\underline{B}][\psi] = [\diagdown B \diagdown]$$

where $[\diagdown A \diagdown]$ and $[\diagdown B \diagdown]$ are diagonal matrices.

Once the modal matrix is found, the forced vibration problem is analyzed. Assume the following

$$\{Y\} = [\psi]\{z\}$$

and $\qquad \{z\} = [\psi]^{-1}\{Y\},$

-61-

where z is a complex coordinate system. Equation 4.4.1 is now expressed as

$$[\underline{A}] \; [\psi] \; \{\dot{z}\} + [\underline{B}] \; [\psi] \; \{z\} = \{\underline{E}(t)\}.$$

Using $[\psi]^T$, the above equation can now be in the form

$$[\smile A \smile] \; \{\dot{z}\} + [\smile B \smile] \; \{z\} = [\psi]^T\{\underline{E}\} \equiv \{N(t)\}.$$

This will yield six uncoupled equation of motion in the form

$$a_{ii} \; \dot{z}_i(t) + b_{ii} \; z_i(t) = N_i(t), \quad i = 1,6$$

or $\quad \dot{z}_i(t) - \nu_i \; z_i(t) = (1/a_{ii}) \; N_i(t)$ \hfill (6.1.4)

where $\nu_i = -b_{ii}/a_{ii}$.

The solution of Equation 6.1.4 is

$$z_i(t) = \frac{1}{a_{ii}} \int_0^t e^{\,\nu_i(t-\tau)} \; N_i(\tau) \; d\tau, \quad i = 1,6. \hspace{1em} (6.1.5)$$

Once Equation 6.1.5 is solved, the $\{\underline{y}\}$ matrix is found by the relationship

$$\{\underline{y}\} = [\psi] \; \{z\}.$$

Recalling from Section 4.4.2 the terms of the three degree of freedom equations of motion $\{\underline{y}\}$ matrix is

$$\{\underline{y}\} = \begin{bmatrix} \dot{x} \\ \dot{y} \\ \dot{\theta} \\ x \\ y \\ \theta \end{bmatrix}.$$

Hence, the desired vessel-drydock system response can be found in the fourth, fifth and sixth terms of the $\{\underline{y}\}$ matrix, i.e. $x$, $y$ and $\theta$.

## 6.2 Vessel Response: Fourth Order Runge-Kutta Numerical Method

A fourth order Runge-Kutta numerical scheme is chosen to analyze the non-linear equations of motion due to its simplicity and easy use of computer programming. It also will be used to verify solutions found by other methods. The non-linear Equations 4.2.6; 4.3.6 and 4.3.8; 4.4.3. 4.4.4 and 4.4.8 correspond to the one, two and three degree of freedom models respectively. Since all three systems of equations are similar in form, only the three degree of freedom non-linear model will be developed.

The three degree of freedom non-linear equations of motion are

$$m_{11} \ddot{x} + m_{13} \ddot{\theta} + c_{11} \dot{x} + c_{13} \dot{\theta} + k_{11} x = -m_{11} \ddot{x}_g$$

$$m_{22} \ddot{y} + c_{22} \dot{y} + k_{22} y = -m_{22} \ddot{y}_g$$

and

$$m_{33} \ddot{\theta} + m_{31} \ddot{x} - m_{31} \ddot{y} \theta + c_{33} \dot{\theta} + c_{31} \dot{x} + k_{31} \theta$$
$$= -m_{31} \ddot{x}_g + m_{31} \ddot{y}_g \theta .$$

The coefficient of the above equations can be found in Section 4.4.2. These equations can be rearranged into

$$\ddot{x} + \frac{m_{13}}{m_{11}} \ddot{\theta} = -\frac{c_{11}}{m_{11}} \dot{x} - \frac{c_{13}}{m_{11}} \dot{\theta} - \frac{k_{11}}{m_{11}} x - x_g \qquad (6.1.2a)$$

$$\ddot{y} = -\frac{c_{22}}{m_{22}} \dot{y} - \frac{k_{22}}{m_{22}} y - \ddot{y}_g \qquad (6.1.2b)$$

and

$$\ddot{\theta} + \frac{m_{31}}{m_{33}} \ddot{x} = -\frac{c_{33}}{m_{33}} \dot{\theta} - \frac{c_{31}}{m_{33}} \dot{x} - \left( \frac{k_{33}}{m_{33}} + \frac{m_{31}c_{22}}{m_{33}m_{22}} \dot{y} + \frac{m_{31}k_{22}}{m_{22}m_{33}} y \right) \theta$$
$$- \frac{m_{31}}{m_{33}} \ddot{x}_g . \qquad (6.2.1c)$$

-63-

Equations 6.2.1a, 6.2.1b and 6.2.1c can be made into an equivalent first order system by the following substitutions

$$\dot{x} = R = e_1(t,x,R,T)$$

$$\dot{y} = S = f_1(t,y,S)$$

$$\dot{\theta} = T = g_1(t,\theta,y,R,S,T)$$

$$\dot{R} + \frac{m_{13}}{m_{11}}\dot{T} = e_2(t,x,R,T)$$

$$\dot{S} = f_2(t,y,S)$$

$$\dot{T} + \frac{m_{31}}{m_{13}}R = g_2(t,\theta,y,R,S,T).$$

The Runge-Kutta formulas [8] for this system are

$$k_{11} = hR_n \qquad \ell_{11} = h\{e_2(t,x_n,R_n,T_n)\}$$

$$k_{11} = hS_n \qquad \ell_{12} = h\{f_2(t,y_n,S_n)\}$$

$$k_{11} = hT_n \qquad \ell_{13} = h\{g_2(t,\theta_n,y_n,R_n,S_n,T_n)\}$$

$$k_{21} = h(R_n + \tfrac{1}{2}\ell_{11}) \quad \ell_{21} = h\{e_2(t,x_n + \tfrac{1}{2}k_{11},R_n + \tfrac{1}{2}\ell_{11},T_n + \tfrac{1}{2}\ell_{13})\}$$

$$k_{22} = h(S_n + \tfrac{1}{2}\ell_{12}) \quad \ell_{22} = h\{f_2(t,y_n + \tfrac{1}{2}k_{12},S_n + \tfrac{1}{2}\ell_{12})\}$$

$$k_{23} = h(T_n + \tfrac{1}{2}\ell_{13}) \quad \ell_{23} = h\{g_2(t,\theta_n + \tfrac{1}{2}k_{13},y_n + \tfrac{1}{2}k_{12},$$

$$R_n + \tfrac{1}{2}\ell_{11},\ S_n + \tfrac{1}{2}\ell_{12},\ T_n + \tfrac{1}{2}\ell_{13})\}$$

$$k_{31} = h(R_n + \tfrac{1}{2}\ell_{21})\ \ell_{31} = h\{e_2(t,x_n + \tfrac{1}{2}k_{21},R_n + \tfrac{1}{2}\ell_{21},T_n + \tfrac{1}{2}\ell_{23})\}$$

$$k_{32} = h(S_n + \tfrac{1}{2}\ell_{22})\ \ell_{32} = h\{f_2(t,y_n + \tfrac{1}{2}k_{22},S_n + \tfrac{1}{2}\ell_{22})\}$$

$$k_{33} = h(T_n + \tfrac{1}{2}\ell_{23})\ \ell_{33} = h\{g_2(t,\theta_n + \tfrac{1}{2}k_{23},y_n + \tfrac{1}{2}k_{22},R_n + \tfrac{1}{2}\ell_{21},$$

$$S_n + \tfrac{1}{2}\ell_{22},T_n + \tfrac{1}{2}\ell_{23})\}$$

$$k_{41} = h(R_n + \ell_{31}) \quad \ell_{41} = h\{e_2(t, x_n + k_{31}, R_n + \ell_{31}, T_n + \ell_{33})\}$$

$$k_{42} = h(S_n + \ell_{32}) \quad \ell_{42} = h\{f_2(t, y_n + k_{32}, S_n + \ell_{32})\}$$

$$k_{43} = h(T_n + \ell_{33}) \quad \ell_{43} = h\{g_2(t, \theta_n + k_{33}, y_n + k_{32}, R_n + \ell_{31},$$
$$S_n + \ell_{32}, T_n + \ell_{33})\}$$

and lastly,

$$x_{n+1} = x_n + \frac{1}{6}(k_{11} + 2k_{21} + 2k_{31} + k_{41})$$

$$y_{n+1} = y_n + \frac{1}{6}(k_{12} + 2k_{22} + 2k_{32} + k_{42})$$

$$\theta_{n+1} = \theta_n + \frac{1}{6}(k_{13} + 2k_{23} + 2k_{33} + k_{43})$$

$$R_{n+1} = R_n + \frac{1}{6}(\ell_{11} + 2\ell_{21} + 2\ell_{31} + \ell_{41})$$

$$S_{n+1} = S_n + \frac{1}{6}(\ell_{12} + 2\ell_{22} + 2\ell_{32} + \ell_{42})$$

$$T_{n+1} = T_n + \frac{1}{6}(\ell_{13} + 2\ell_{23} + 2\ell_{33} + \ell_{43})$$

where h is the time step. Hence, the desired vessel-drydock system response can be found and system failure analyzed by the iteration of the Runge-Kutta scheme.

### 6.3 Vessel Response: Response Spectrum Analysis

The degrees of freedom mathematical models developed in previous sections produce a time history of the seismic response of a drydocked vessel. These models use numerous computer iterations to find their time history in order to evaluate the system's maximum seismic response. Another way to determine the maximum seismic response of a drydocked vessel is the response spectrum analysis method. Simplicity and fast results are characteristic of this spectrum method. However, only maximum response is produced and no time history is generated.

The response spectra are graphs of the maximum seismic response of single degree of freedom systems over a range of

system natural frequencies. These graphs are generated for particular earthquake and can contain acceleration, velocity, displacement, or combination of all three responses for the given system. Simplified response spectra are plotted for earthquake design analysis. The El Centro earthquake response spectra graph, shown in Figure 6.1, will be used to confirm the results of the mathematical models in this thesis. The simplified spectrum portion of this graph is described in reference [2] and updated in reference [7].

The simplified El Centro earthquake response spectra used described the maximum relative displacement of the system shown in the insert of Figure 6.1. The linear equation of motion for this simple system is

$$m\ddot{u} + c\dot{u} + ku = -m\,\ddot{y}_{sa}\,f_a(t)$$

where  $u(t)$ = relative displacement of the mass with respect to the support

and  $\ddot{y}_{sa}$ = maximum support acceleration.

The natural frequency of the system is given by

$$\omega^2 = k/m$$

$$f = \omega/2\pi \ .$$

Using the response spectra graph and the particular frequency, $f$, of the system of interest, the maximum value of the relative displacement, $u_m$, is determined. In equation form, the relative displacements of a single degree of freedom system with 5% critical damping subjected to the El Centro earthquake ground motions are:

for $\omega$ < 2.24 rad/sec,

$$u_{max} = 1.4 \ (\ddot{y}_{sa})_{max} = 11.62 \text{ inches}, \qquad (6.3.1)$$

-66-

for   2.24 < $\omega$ < 12.74,

$$u_{max} = 1.9 \ (Y_{sa})_{max}/\omega = 26.03/\omega \text{ inches}, \quad (6.3.2)$$

for  $\omega$  > 12.74,

$$u_{max} = 2.6 \ (Y_{sa})_{max}/\omega^2 = 331.53/\omega^2 \text{ inches.} \quad (6.3.3)$$

These formulas generated the simplified response spectrum

shown in Figure 6.2.

In order to use Figure 6.2 to verify the one, two and

three degree of freedom vessel-drydock models, some

manipulation must be performed.  This is because the linear

equations of motion of the models do not exactly match those

of the system pictured in Figure 6.1.  Examining the one

degree of freedom linear equation of motion (Equation 4.2.7);

$$I_k \ddot{\theta} + 2\xi I_k \omega_n \dot{\theta} + [(B^2/2)K_{sv} - W\overline{KG}]\theta = -M \ \overline{KG} \ \ddot{x}_g$$

or

$$\ddot{\theta} + 2\xi\omega_n\dot{\theta} + ([(B^2/2)K_{sv} - W \ \overline{KG}]/I_k)\theta = -(M \ \overline{KG}/Ik) \ \ddot{x}_g.$$

The natural frequency for the above equation is defined as

$$\omega_n^2 = ((B^2/2)K_{sv} - W \ \overline{KG})/I_k.$$

Using Figure 6.2, this frequency gives a corresponding $u_{max}$.

Hence, the maximum rotational response of the system,   , is

then determined by the relation

$$\theta_{max} = M \ \overline{KG}/I_k \ u_{max}.$$

Table 6.1 lists the maximum rotational response for the eleven

configurations found in Section 5.

# TABLE 6.1

## One Degree of Freedom Vessel-Drydock System
## Maximum Response Using Response Spectrum Analysis

| System | $\omega_n$ (rad/sec) | $\theta_{max}$ (rads.) |
|--------|---------------------|------------------------|
| 1  | 5.580  | 0.01594 |
| 2  | 3.933  | 0.02619 |
| 3  | 4.141  | 0.02149 |
| 4  | 2.870  | 0.03100 |
| 5  | 2.870  | 0.03100 |
| 6  | 10.254 | 0.00698 |
| 7  | 8.327  | 0.00860 |
| 8  | 7.255  | 0.00987 |
| 9  | 6.147  | 0.01445 |
| 10 | 7.253  | 0.01299 |
| 11 | 6.498  | 0.01450 |

The response spectrum analysis to the two and three degree of freedom systems is applied by means of the modal method described in reference [2]. Concisely, the modal method requires that the system natural modes be determined. Then, the response of the system to a known forcing input can be developed by mode superposition. Treating each natural mode as a single degree of freedom system with its own natural frequency, this method is good for simplifying seismic response analysis. Since each natural mode acts as a separate system, the maximum response may be determined. Then, a conservative estimate for the maximum response of the original system can be made by adding up the maximum response of each mode.

The method of adding maximum modal responses gives an upper bound for the maximum system response. Since there is a known response spectrum, the amount in which each natural mode contributes to the maximum response for a given input can be

determined. This is known as the participation factor of each given mode. A full description and derivation of participation factors including implementation techniques can be found in reference [2], and will not be presented here. The participation factor for each natural mode in the two and three degree of freedom case is calculated to confirm computer generated results of maximum responses in Appendix 3.

6.4 Vessel Response: Quasi-Static Force Analysis

As described in Section 4.1, the quasi-static force method replaces the earthquake motions by a force corresponding to the vessel mass times 0.2g. This analysis only allows rotation about the vessel's keel hence, the quasi-static force analysis is itself a one degree of freedom model with system response, in radians, determined by Equation 4.1.4, i.e.

$$\theta = M_S/L^2 \, K_{SV}$$

where $M_S = 448 * \Delta * \overline{KG}$

$\Delta$ = displacement in tons

$L = B/2$.

The results of this method are listed in Table 6.2.

## TABLE 6.2

### System Response using Quasi-Static Force Analysis

| SYSTEM | $\theta$, IN RADIANS |
|--------|---------------------|
| 1 | 0.00809 |
| 2 | 0.01564 |
| 3 | 0.01422 |
| 4 | 0.02749 |
| 5 | 0.02749 |
| 6 | 0.00199 |
| 7 | 0.00300 |
| 8 | 0.04419 |
| 9 | 0.00670 |
| 10 | 0.00051 |
| 11 | 0.00637 |
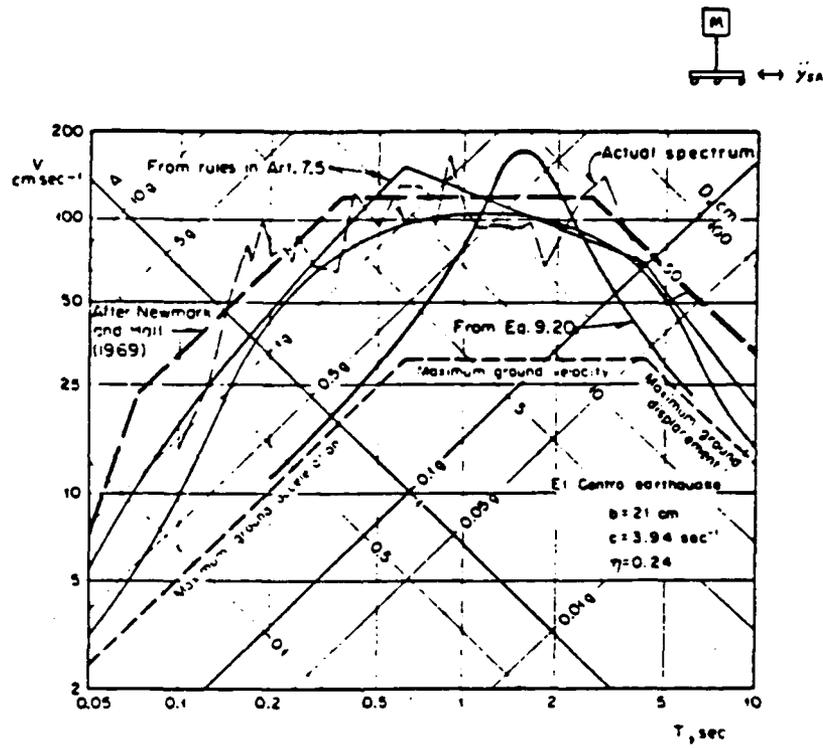
FIGURE 6.1
Actual El Centro Earthquake Response Spectrum
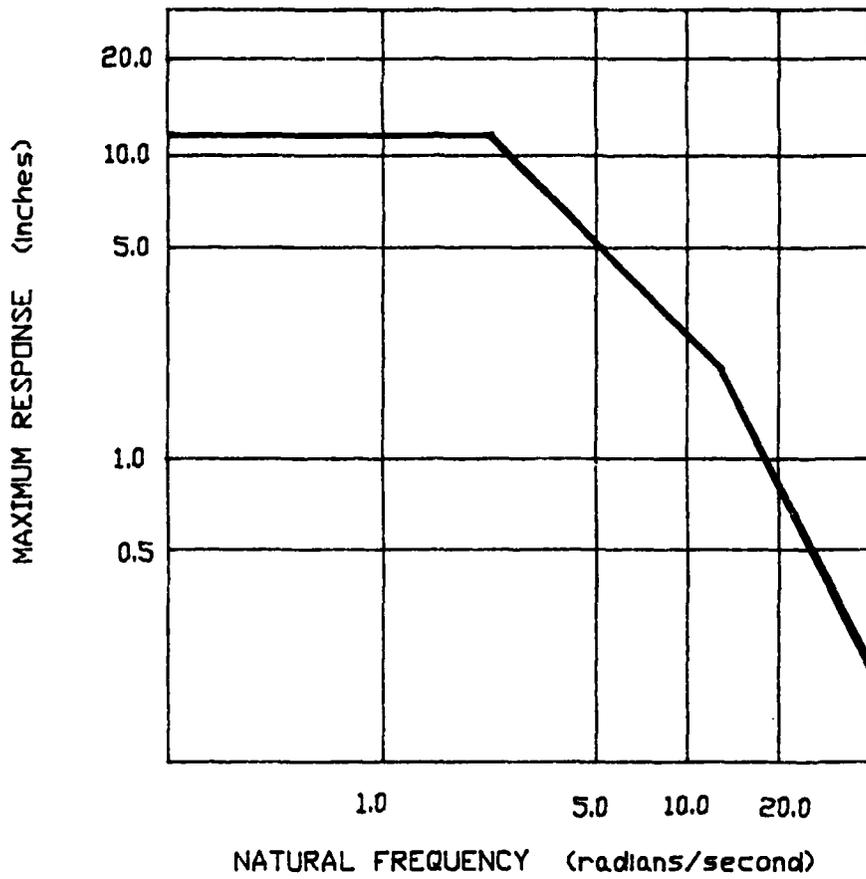
FIGURE 6.2
Idealized El Centro Earthquake Response Spectrum, 5% Damping

## 7.0  COMPUTER SOLUTIONS

In this section of the thesis, the computer programs
needed to implement the mathematical models and the associated
seismic response are developed.  Due to the numerous
iterations that is required for the modal analysis and
Runge-Kutta methods to effectively determine vessel-drydock
response, all computer work is performed at the MIT Joint
Computer Facility (JCF).  The required computer programs are
written in Fortran 77.

In order to check the computer generated results, the
vessel-drydock mathematical models are subjected to a
sinusoidal earthquake input.  The advantage being that closed
form solutions of responses to sinusoidal inputs can be
calculated.  Thus, closed form response can be compared to the
computer generated responses.

Upon obtaining the correct results for a sinusoidal
earthquake, the El Centro earthquake's acceleration time
history is applied to the vessel-drydock system.  The maximum
value of these computer generated results is compared to the
maximum response for the system predicted by the response
spectrum method found in Section 6.3.

### 7.1  Modal Analysis Solution

#### 7.1.1  Computer Program Development

As described in Section 6.3, the program approaches the
problem by first assembling matrices $\underline{A}$ and $\underline{B}$.  The program
then uses the International Mathematical and Statistical
Library (IMSL) subroutine EIGZF resident on JCF to perform the

system free vibration eigenvalue problem on matrices $\underline{A}$ and $\underline{B}$. The output of subroutine EIGZF is the modal matrix $[\psi]$ of the vessel-drydock system. Reference [4] contains further information about subroutine EIGZF.

The equations of motion can now be de-coupled by using the modal matrix. De-coupling the equations of motion leaves equations of the form

$$a_{ii}\, \dot{z}_i(t) + b_{ii}\, z_i(t) = N_i(t) \ , \quad i = 1, m$$

where m is equal to twice the number of the particular degree of freedom model, i.e. for the one degree of freedom $\sim$ m = 2. The solution to the above equation is

$$z_i(t) = \frac{1}{a_{ii}} \int_0^t e^{-b_{ii}/a_{ii}(t-\tau)} \, N_i(\tau)\, d\tau, \quad i = 1, m,$$

where $a_{ii}$ and $b_{ii}$ represent the diagonal elements of the diagonalized $\underline{A}$ and $\underline{B}$ matrices, respectively. The integral

$$\int_0^t e^{-b_{ii}/a_{ii}\,(t-\tau)} \, N_i(\tau)\, d\tau$$

can be evaluated using Simpson's rule, which is

$$\Sigma A_i(t) = [(A_i(t - 2\Delta\tau) + N_i(t - 2\Delta\tau))e^{-(b_{ii}/a_{ii})2\Delta\tau}$$

$$+ 4N_i(t - \Delta\tau)e^{-(b_{ii}/a_{ii})\Delta\tau} + N_i(t)]$$

where $\quad \Delta\tau \quad$ = data time increments

and $\qquad A(t - 2\Delta\tau) = \Sigma A(t)$ evaluated two time increments previously.

The value $z_i(t)$ is evaluated as

$$z_i(t) = (1/a_{ii})(\Delta\tau/3)(\Sigma A_i(t)), \quad i = 1, m.$$

To obtain the values of the system response for a particular time, the relationship

$$\{y\} = [\psi] \{z\}$$

where $\{y\}$ = system response vector is used, using the column vector $[z]$ for the time at which results are desired. The values of block forces caused by the system response are calculated every 0.02 seconds for the first 30 seconds of the earthquake. Only the first 30 seconds are needed due to the nature of the El Centro earthquake the seismic acceleration after 30 seconds are small when compared to the first 30 seconds. The resultant block forces and vessel motions are then checked against failure criteria established in Section 3. The amplitude of the seismic acceleration is reduced until no block failure occurs. Hence, the maximum earthquake acceleration, in g's, that the vessel-drydock system can withstand without failure can be found.

The three degree of freedom vessel response computer program is listed in Appendix 1. Since all three linearized models found in Equations 4.2.8, 4.3.11 and 4.4.11 are in the form

$$[\underline{A}]\{\dot{y}\} + [\underline{B}]\{y\} = \{\underline{E}(t)\},$$

the three degree of freedom computer program is modified to give the one and two degree model results.

7.1.2  Computer Program Input

The computer program listed in Appendix 1 evaluates the horizontal and vertical translations and rotation of the three degree of freedom vessel-drydock system in increments of 0.02 seconds. The program requires the following input:  vessel

-75-

weight, WEIGHT, in kips, keel to center of gravity height
($\overline{KG}$), H, in inches, vessel mass moment of inertia about the
keel, $I_K$, in kip-in-sec$^2$, time increments of ground
acceleration data, DTAU, in seconds, side and keel piers
vertical and horizontal stiffnesses, $K_{sv}$, $K_{kv}$, $K_{sh}$, and $K_{kh}$,
in kips/inch, gravitational constant, GRAVITY, in inch/sec$^2$,
side and keel pier dimensions of width and height, BASE SIDE,
BASE KEEL, HTSIDE and HTKEEL, in inches, the coefficient of
friction between the block-block and ship-block interfaces, U1
and U2, horizontal distance between the center of vessel
contact with port and starboard side piers, BR, in inches,
vertical/horizontal ground acceleration ratio, AMP,
proportional limits of side and keel block materials, PLSIDE
and PLKEEL, in kips/in$^2$, total cross-sectional area of side
and keel piers, SIDE AREA and KEEL AREA, in in $^2$, percent
critical damping, ZETA, vessel hull number, HULL, and finally
the vessel-drydock configuration number, NSYS.  The following
is where these inputs can be found:

| | |
|---|---|
| Table 5.1 | NSYS and HULL |
| Table 5.2 | WEIGHT, H, $I_k$, and BR |
| Table 5.3 | BASESIDE, BASEKEEL, HTSIDE, SIDEAREA and KEELAREA |
| Table 5.4 | $K_{kv}$, $K_{sv}$, $K_{kh}$ and $K_{sh}$. |

The rest of the inputs are assumed to be

GRAVITY = 384 in/sec$^2$

U1 = U2 = 0.5

PLSIDE = PLKEEL = 0.7 kips/in$^2$

and    AMP = 0.5.

The value of 0.5 for the vertical/horizontal ground acceleration ratio (AMP) parameter is used because no vertical component of the El Centro earthquake acceleration was available at the time of this thesis.

Damping coefficients equal to 5% of critical damping (i.e. ZETA = 0.05) are assumed for the entire system. This analysis *for damping coefficients* can be found in Appendix 3 and is implemented directly into the computer program.

Certain idealized system failure criteria from Section 3 need to be modified to accurately represent the vessel-drydock system as it actually exists. As stated in Section 3.1, block crushing occurs when the stress on the block exceeds the block's proportional limit. The vessel rests upon soft wood caps placed on top of the keel and side piers when in the drydock cradle. Crushing of the cap is not considered a failure due to its small size. For the blocking system considered, the generated stresses are transferred through the cap to the top drydock block.

Also, a side pier cannot tip inboard because the vessel hull is not physically attached to the pier and cannot pull the pier beyond it's upright position. The softwood cap on top of the side pier causes the vessel force to be applied 12 inches from the inboard edge. As shown in Figure 7.3, this causes the static force vector to fall outside of the middle one-third of the pier base, as discussed in Section 3. Since the pier will only tip in the outboard direction, the resultant vessel force must fall in the outboard one-third of

-77-

the pier base.  Thus, this failure criteria (from Figure 7.3)
for the side pier is

$$\frac{\text{HORIZONTAL FORCE}}{\text{VERTICAL FORCE}} < \frac{2/3 \text{ Width} - 120}{\text{Pier Height}} \quad .$$

### 7.1.3  Computer Program Testing

In order to validate the modal anlaysis method, the one
degree of freedom mathematical model is checked with a set of
sinusoidal ground accelerations for input.  The input ground
motion was

$$E(\tau) = \ddot{x}_g = 323.95 \sin(3.92t). \tag{7.1.1}$$

This sample function is selected because its magnitude and
frequency closely match that of the maximum acceleration
portion of the El Centro earthquake.  Also, vessel-drydock
system configuration #1 is chosen for this initial analysis.
The results of the one degree of freedom case will be compared
to the closed form solution.

The one degree of freedom linear equation of motion
(Equation 4.2.7) is of the form

$$\ddot{\theta} + 2\xi\omega_n\dot{\theta} + \omega_n^2\theta = -\frac{M\,\overline{KG}}{I_k}E(\tau).$$

The closed form solution of this equation is

$$\theta(t) = -\frac{M\,\overline{KG}}{I_k\omega_d}\int_0^t E(\tau)\,e^{-\xi\omega_n(t-\tau)}\,\sin\omega_d(t-\tau)\,d\tau$$

$$= -\frac{M\,\overline{KG}}{I_k\omega_d}[A(t)\,\sin\omega_d t - B(t)\,\cos\omega_d t] \tag{7.1.2}$$

where

$$A(t) = \int_0^t E(\tau)\,\frac{e^{\xi\omega_n\tau}}{e^{\xi\omega_n t}}\,\cos\omega_d\tau\,d\tau$$

-78-

and $\quad B(t) = \int_0^t E(\tau) \dfrac{e^{\xi\omega_n\tau}}{e^{\xi\omega_n t}} \sin\omega_d\tau \ d\tau.$

The results of a computer run with vessel-drydock system #1 and sinusoidal excitation (Equation 7.1.1) indicate that the maximum rotation angle $\theta$ is 0.038243 radians at a time of 2.02 seconds. To confirm this value, Equation 7.1.2 has to be evaluated

$$\theta(2.02) = -\dfrac{M\,\overline{KG}}{I_k\omega_d}\ [A(2.02)\ \sin\omega_d(2.02) - B(2.02)\ \cos\omega_d(2.02)]$$

where $\quad A(2.02) = \displaystyle\int_0^{2.02} 323.95\ \sin(3.92\tau)\dfrac{e^{\xi\omega_n\tau}}{e^{2.02\xi\omega_n}}\ \cos\omega_d\ \tau\ d\tau$

and $\quad b(2.02) = \displaystyle\int_0^{2.02} 323.95\ \sin(3.92\tau)\ \dfrac{e^{\xi\omega n\tau}}{e^{2.02\xi\omega_n}}\ \sin\omega_d\ \tau\ d\tau.$

From Section 6.3,

$\qquad \omega_n = [((B^2/2)K_{sv} - W\,\overline{KG})/I_K)^{1/2}$

$\qquad\quad = 5.580$ rad/sec

and $\quad \omega_d = \omega_n(1 - \xi^2)^{1/2}$

$\qquad\quad = 5.573$ rad/sec.

With these values of natural and damped natural frequencies, the value of A(2.02) can be evaluated using the relationship

$$\int_0^t e^{at}\ \sin bt\ \cos ct\ dt = e^{at}\dfrac{[a\,\sin(b-c)t-(b-c)\cos(b-c)t}{2[a^2+(b-c)^2]}$$

$$+\ e^{at}\dfrac{[a\,\sin(b+c)t-(b+c)\cos(b+c)t]}{2[a^2+(b+c)^2]}\ \Bigg|_0^t$$

Substituting the values

$$t = 2.02$$

$$a = \omega_n = .279$$

$$b = 3.92$$

and $c = \omega_d = 5.573$

The value of A(2.02) becomes

$$323.95(e^{.5636})^{-1} * - .8307 = -153.1629$$

Similarly, for B(2.02),

$$\int_0^t e^{at} \sin bt \sin ct \, dt = e^{at} \frac{[(b-c)\sin(b-c)t + a\cos(b-c)t]}{2[a^2+(b-c)^2]}$$
$$-e^{at} \frac{[(b+c)\sin(b+c)t + a\cos(b+c)t]}{2[a^2+(b+c)^2]} \Bigg|_0^t$$

with the same values of a, b and c as before.

Evaluating, B(2.02) becomes

$$323.95 (e^{.5636})^{-1} * -.2191 = -40.3973$$

Now,

$$\theta(2.02) = \frac{1}{2.54} * \frac{42.6979*193.0}{2411000.*5.573}[-153.1629*\sin(2.02*5.573) - (-40.3973*\cos(2.02*5.573))]$$

$$= .038247 \text{ radians.}$$

Comparing the computer generated solution (0.038243 radians) with the closed form solution (.038247 radians), it can be seen that the computer program is calculating the one degree of freedom rotation formula correctly.

One other simple method to check to see if the rotation displacement time history is correct is to look at the waveform. At steady state condition, $\theta(t)$ will be a sinusoidal with the same frequency as the sinusoidal ground acceleration. An amplitude different and a phase shift will

-80-

be present.  The steady state solution [12] of a equation of
motion in the form

$$m\ddot{x} + c\dot{x} + kx = F \sin\omega t$$

is $\qquad x = \dfrac{|F|}{k} = \dfrac{1}{\sqrt{(1-r^2)^2+(2\xi r)^2}} \; \sin\left(\omega t - \tan^{-1}\dfrac{2\xi r}{1-r^2}\right)$

where $\qquad r = \omega/\omega_n$

$\qquad \omega_n = (k/m)^{1/2} = $ Natural Frequency

$\qquad \xi = 1/2 \; c/\sqrt{km} = $ percent critical damping.

In this case,

$\qquad \omega_n = 5.580$ rad/sec

$\qquad r = 3.92/5.580 = .703$

$\qquad \xi = .05$

$\qquad |F| = M \; \overline{KG} \; \dfrac{|\ddot{x}_g|}{2.54} = 1051012.9$ lb.in

$\qquad k = 75071464$ lb in.

so now,

$\qquad \theta$ steady state $= .027402 \sin(3.92t - .1381)$ radians (7.1.3)
Figure 7.1 represents the sinusoidal ground acceleration
(Equation 7.1.1) and Figure 7.2 which represents the rotation,
$\theta(t)$, of the vessel-drydock system as generated by the modal
analysis computer program.  Note the same frequency between
Figures 7.1 and 7.2.  The steady state portion of Figure 7.2
is matched to Equation 7.1.3.  In conclusion the model
analysis method correctly predicts the one degree of freedom
mathematical model.

### 7.1.4 Computer Program Results

The modal analysis method can now be used with the El Centro earthquake data to predict the system response.  Eleven vessel-drydock configurations (Section 5.0) are analyzed for maximum ground acceleration that the system can withstand without block failure.  Also, the first block failure modes exhibited by the systems are found.

For the eleven vessel-drydock systems, the linearized one, two and three degree of motion mathematical model responses are calculated and listed in Table 7.3, 7.4, and 7.5, respectively.  These tables can be found on pages 91 thru 93.  The program further calculates that vessel liftoff (Section 3.4) will be the first failure mode to occur when ground accelerations are greater than the maximum permissible ground acceleration listed in Table 7.3, 7.4, and 7.5.  The maximum permissible ground acceleration is based on the reduction of the El Centro acceleration amplitude until no failure occur.  However, the waveform remains unchanged.

In order to get a visual picture of the various responses, vessel-drydock system #1 is selected to be plotted. Figures 7.4; 7.5a and b and 7.6a,b, and c are the appropriate responses for the one, two and three degree of freedom models. Only the first thirty seconds of the earthquake are required to give the maximum system response as seen by the plots. Note that the relative horizontal displacement (Figure 7.6a) and rotation (7.6b) time histories of the three degree of freedom model are indentical to the ones found in the two degree of freedom model.  This is due to the uncoupled

vertical equation of motin found in the linearized three degree of freedom case.

As a check for the computer generated results, the system maximum responses due to full magnitude El Centro earthquake accelerations are compared to the system maximum responses determined by response spectrum analysis in Table 7.1 and 7.2. These tables are generated by combining the computer results of various models and Tables 6.1 (Section 6.3) and A.3.3 (Appendix 3). Since the response spectrum method is an approximate one (Section 6.3), the maximum 20% error between its results and the computer results in the one degree of freedom case is reasonable. Thus, the one degree program is generating accurate results.

In the two degree of freedom case, the response spectrum method predicts the worst case if the system's two natural modes reach a maximum at the same time, and add together. This happened in the rotational case, but only twice in the relative displacement case. In the majority of the systems, the computer generated rotational response actually exceeded the rotational response predicted by modal analysis. The maximum 35% difference between the two results can be accounted for because of the approximate, simplified response spectrum mentioned earlier. The three degree of freedom case has the same order of error as found in the two degree case as shown in Table 7.2. Hence, all mathematical models perform satisfactory using the modal analysis computer program.

-83-

## TABLE 7.1

### One Degree of Freedom Equation of Motion Response Comparison
### Modal Analysis Computer Results of Linear System

| System | $\|\theta\|$ radians |
|--------|--------------------|
| 1 | 0.01474 |
| 2 | 0.01618 |
| 3 | 0.01436 |
| 4 | 0.02966 |
| 5 | 0.02966 |
| 6 | 0.00832 |
| 7 | 0.0115 |
| 8 | 0.01712 |
| 9 | 0.01512 |
| 10 | 0.01714 |
| 11 | |

### Response Spectrum Method Results of Linear System

| System | $\|\theta\|$ radians |
|--------|--------------------|
| 1 | 0.01594 |
| 2 | C.02619 |
| 3 | 0.02149 |
| 4 | 0.031 |
| 5 | 0.031 |
| 6 | 0.00698 |
| 7 | 0.0068 |
| 8 | 0.00987 |
| 9 | 0.01445 |
| 10 | 0.01299 |
| 11 | 0.0145 |

## TABLE 7.2

### Three Degree of Freedom Equation of Motion Response Comparison
### Modal Analysis Computer Results of Linear System

| System | \|x\| (inches) | \|y\| (inches) | \|θ\| (radians) |
|--------|----------------|----------------|-----------------|
| 1 | 0.27971 | 0.07374 | 0.01458 |
| 2 | 0.22661 | 0.10948 | 0.01636 |
| 3 | 0.53288 | 0.15395 | 0.01546 |
| 4 | 0.58122 | 0.18352 | 0.03130 |
| 5 | 0.24721 | 0.11703 | 0.02992 |
| 6 | 0.36179 | 0.06123 | 0.00814 |
| 7 | 0.39118 | 0.06870 | 0.00879 |
| 8 | 0.39889 | 0.07140 | 0.01154 |
| 9 | 0.61065 | 0.11749 | 0.01587 |
| 10 | 0.57808 | 0.11970 | 0.01547 |
| 11 | 0.61730 | 0.11676 | 0.01734 |

### Response Spectrum Method Results of Linear System

| System | \|x\| (inches) | \|y\| (inches) | \|θ\| (radians) |
|--------|----------------|----------------|-----------------|
| 1 | 0.33275 | 0.10859 | 0.01646 |
| 2 | 0.27141 | 0.12225 | 0.02348 |
| 3 | 0.65142 | 0.19089 | 0.02350 |
| 4 | 0.53788 | 0.21491 | 0.02350 |
| 5 | 0.21468 | 0.12980 | 0.03202 |
| 6 | 0.45271 | 0.08025 | 0.00683 |
| 7 | 0.46833 | 0.09708 | 0.00866 |
| 8 | 0.46597 | 0.10762 | 0.01009 |
| 9 | 0.64366 | 0.15381 | 0.01552 |
| 10 | 0.65864 | 0.13662 | 0.01342 |
| 11 | 0.67467 | 0.14955 | 0.01552 |

NOTE: Two Degree of Freedom System Maximum Response correspond to $x$ and $\theta$.

## 7.2  Fourth Order Runge-Kutta Analaysis Solution

### 7.2.1  Computer Program Development

As described in Section 6.2, the Runge-Kutta scheme uses a set of first order differential equations to describe the second order vessel-drydock system.  A simple example of this procedure is done on the following equation

$$m\ddot{x} + c\dot{x} + kx = f(t) + g(t)x$$

let $r = \dot{x}$ and rearranging yields two first order equations,

$$\dot{x} = r$$

$$\dot{r} = -\frac{c}{m} r - \frac{k}{m} x + f(t) + g(t)x$$

Now, the first order system can be implemented into a computer program.

Briefly, the fourth order Runge-Kutta numerical scheme is one that makes use of predicted velocity and acceleration at a given time to compute the displacement and velocity for the next time increment.  This can be done by the basic relationships

$$x_{n+1} = x_n + \dot{x}_n \Delta t$$

and

$$\dot{x}_{n+1} = \dot{x}_n + \ddot{x}_n \Delta t$$

However, $\dot{x}$ and $\ddot{x}$ are not found by differentiation but through the manipulations of the second order equation into a set of first order equations.  This can be done by procedure shown in the previous paragraph.

The first step in the computer program development is to place the set of first order differential equations into the Runge-Kutta formulas shown in Section 6.2.  The evaluation of these formulas will predict the velocity and acceleration

that will be used in the next time increment. Now, the system response, both displacements and associated velocities, can be calculated using the previous information. This process is marched through time steps in our to produce a time history of the system response.

Now, the values of block forces caused by the system response are calculated every 0.01 seconds for the first 30 seconds of the earthquake. The first 30 seconds are only required to analyze for maximum seismic response. The resultant block forces and vessel motions are then checked against failure criteria found in Section 3. The amplitude of the seismic acceleration is reduced until no block failure occurs. Like in the modal analysis method (Section 7.1), the maximum earthquake acceleration, in g's, that the vessel-drydock system can withstand without failure can be found.

The Runge-Kutta analysis gives the ability to analyze both the linear and non-linear equations of motion for the one, two and three degree of motion mathematical models. The non-linear three degree of freedom vessel response computer program is listed in Appendix 2. The program is developed around Equations 4.4.5, 4.4.6 and 4.4.8 and those found in Section 6.2. Since all linear and non-linear models developed in this thesis can be arranged into the Runge-Kutta formulas, the non-linear three degree of freedom comptuer program is modified to give desired model results.

### 7.2.2 Computer Program Input

The computer program listed in Appendix 2 evaluates the horizontal and vertical translations and rotation of the non-linear three degree of freedom vessel-drydock system in increments of 0.01 seconds. The program requires the identical input found in Section 7.1.2 for the modal analysis method. Hence, the program inputs needs not be listed again. Like in the previous case, Appendix 3 provides the damping coefficients to be implemented into the computer program.

### 7.2.3 Computer Program Testing

In order to validate the fourth order Runge-Kutta numerical scheme, the linear one degree of freedom mathematical model is checked with a set of sinusoidal ground accelerations for input. The same input ground motion that is used to validate the modal analysis is implemented in this case, i.e.

$$E(\tau) = \ddot{x}_g = 329.95 \sin(3.92t). \qquad (7.2.1)$$

This sample function is selected because its magnitude and frequency closely match that of the maximum acceleration portion of the El Centro earthquake. Also, vessel-drydock system configuration #1 is chosen for this initial analysis. The results of the linearized one degree of freedom case will be compared to the modal analysis and closed form solutions.

The results of a computer run with vessel-drydock system #1 and sinusoidal excitation (Equation 7.2.1) indicate that the maximum rotation angle $\theta$ is 0.038236 radians at a time of 2.02 seconds. Comparing this the computer generated solution with the modal analysis solution (0.038243 radians) and the

closed form solution (0.038247 radians) found in Section 7.1.3, it can be seen that the computer program is calculating the linearized one degree of freedom rotation formula correctly. Also, Figure 7.7 which represents the rotation, $\theta$ (t), of the vessel-drydock system as generated by the Runge-Kutta computer program is essentially identical to Figure 7.2 generated by the modal analysis computer program.

In conclusion, the fourth order Runge-Kutta method correctly predicts the linearized one degree of freedom mathematical model. Now, the computer program will be used for the linear and non-linear one, two and three degree of freedom systems.

### 7.2.4 Computer Program Results

The fourth order Runge-Kutta analysis can be implemented with the El Centro earthquake data to predict the system response. Eleven vessel-drydock configurations (Section 5.0) are analyzed for maximum ground acceleration that the ystem can withstand without block failure. Also, the first block failure modes exhibited by the systems are found.

For the eleven vessel-drydock systems, the linear and non-linear one, two and three degree of motion mathematical model responses are calculated and listed in Table 7.3, 7.4 and 7.5, respectively. These tables can be found on pages 91 thru 93. The program further calculates that vessel liftoff (Section 3.4) will be the first failure mode to occur when ground accelerations are greater than the maximum permissible ground acceleration listed in Table 7.3, 7.4 and 7.5.

In order to get a visual picture of the various linear and non-linear responses, vessel-drydock system #1 is selected to be plotted.  Figures 7.8, 7.9 a and b, 7.10 a, b and c are the appropriate response for the linear one, two and three degree of freedom models and Figures 7.11, 7.12a and b and 7.13 a, b and c are for the non-linear models.  Note that these figures are almost identical to Figures 7.3, 7.4a and b and 7.5 a, b and c generated by the modal analysis method (Section 7.1.5).  This reinforces the equivalency of the results found by the two numerical shemes.  This can also be seen by comparing the system maximum responses of the Runge-Kutta method to that of the modal analysis method.  Both are listed in Table 7.3, 7.4 and 7.5.  The maximum error for any given case is 5%.  Hence, all mathematical models perform satisfactory using the *fourth order* Runge-Kutta computer program.

### TABLE 7.3

#### Modal Analysis Method Results of Linear System

| System | $\theta_{max}$ (radians) | Time (sec) | Maximum Acceleration (q's) |
|---|---|---|---|
| 1 | 0.003390 | 6.64 | 0.0759 |
| 2 | 0.003883 | 9.28 | 0.0792 |
| 3 | 0.006033 | 9.22 | 0.1368 |
| 4 | 0.006822 | 8.68 | 0.0759 |
| 5 | 0.004513 | 8.68 | 0.0462 |
| 6 | 0.001999 | 5.36 | 0.0792 |
| 7 | 0.002422 | 5.84 | 0.0924 |
| 8 | 0.002760 | 8.98 | 0.0792 |
| 9 | 0.005138 | 7.54 | 0.0990 |
| 10 | 0.004537 | 8.98 | 0.0990 |
| 11 | 0.004972 | 7.92 | 0.0957 |

#### 4th Order Runge-Kutta Numerical Method Results of Linear System

| System | $\theta_{max}$ (radians) | Time (sec) | Maximum Acceleration (q's) |
|---|---|---|---|
| 1 | 0.003390 | 6.64 | 0.0759 |
| 2 | 0.003882 | 9.27 | 0.0792 |
| 3 | 0.006032 | 9.22 | 0.1386 |
| 4 | 0.006822 | 8.68 | 0.0759 |
| 5 | 0.004153 | 8.68 | 0.0462 |
| 6 | 0.002004 | 5.35 | 0.0792 |
| 7 | 0.002426 | 5.83 | 0.0924 |
| 8 | 0.002763 | 8.97 | 0.0792 |
| 9 | 0.005141 | 7.54 | 0.0990 |
| 10 | 0.004543 | 8.98 | 0.0990 |
| 11 | 0.004972 | 7.92 | 0.0957 |

#### 4th Order Runge-Kutta Numerical Method Results of Non-Linear System

| System | $\theta_{max}$ (radians) | Time (sec) | Maximum Acceleration (q's) |
|---|---|---|---|
| 1 | 0.003391 | 6.64 | 0.0759 |
| 2 | 0.003883 | 9.27 | 0.0792 |
| 3 | 0.006032 | 9.23 | 0.1386 |
| 4 | 0.006825 | 8.68 | 0.0759 |
| 5 | 0.004154 | 8.68 | 0.0462 |
| 6 | 0.002004 | 5.35 | 0.0792 |
| 7 | 0.002427 | 5.83 | 0.0924 |
| 8 | 0.002764 | 8.97 | 0.0792 |
| 9 | 0.005139 | 7.54 | 0.0990 |
| 10 | 0.004546 | 8.98 | 0.0990 |
| 11 | 0.004970 | 7.91 | 0.0957 |

TABLE 7.4
Two Degree of Freedom Equation of Motion Response
Modal Analysis Method Results of Linear System

| System | $x_{max}$ (inches) | Time (seconds) | $\theta_{max}$ (radians) | Time (seconds) | Maximum Acceleration (g's) |
|---|---|---|---|---|---|
| 1 | 0.064335 | 8.38 | 0.003355 | 9.02 | 0.0759 |
| 2 | 0.063873 | 5.38 | 0.003927 | 9.26 | 0.0792 |
| 3 | 0.207826 | 5.42 | 0.006033 | 9.24 | 0.1287 |
| 4 | 0.127868 | 5.72 | 0.006887 | 8.66 | 0.0726 |
| 5 | 0.032138 | 5.80 | 0.003891 | 8.72 | 0.0429 |
| 6 | 0.090448 | 5.78 | 0.002037 | 5.36 | 0.0825 |
| 7 | 0.109531 | 5.46 | 0.002463 | 5.86 | 0.0924 |
| 8 | 0.095734 | 5.98 | 0.002770 | 7.82 | 0.0759 |
| 9 | 0.195410 | 6.06 | 0.005080 | 7.60 | 0.1056 |
| 10 | 0.167644 | 6.04 | 0.004487 | 7.84 | 0.0957 |
| 11 | 0.172847 | 6.08 | 0.004856 | 7.54 | 0.0924 |

4th Order Runge-Kutta Numerical Method Results of Linear System

| System | $x_{max}$ (inches) | Time (seconds) | $\theta_{max}$ (radians) | Time (seconds) | Maximum Acceleration (g's) |
|---|---|---|---|---|---|
| 1 | 0.064566 | 8.38 | 0.003358 | 9.02 | 0.0759 |
| 2 | 0.064934 | 5.38 | 0.003927 | 9.26 | 0.0792 |
| 3 | 0.207015 | 5.56 | 0.006034 | 9.24 | 0.1287 |
| 4 | 0.127317 | 5.72 | 0.006890 | 8.66 | 0.0726 |
| 5 | 0.032442 | 5.80 | 0.003891 | 8.72 | 0.0429 |
| 6 | 0.090984 | 5.78 | 0.002048 | 5.36 | 0.0825 |
| 7 | 0.110229 | 5.46 | 0.002466 | 5.86 | 0.0924 |
| 8 | 0.091996 | 5.98 | 0.002656 | 7.81 | 0.0759 |
| 9 | 0.194354 | 6.06 | 0.005074 | 7.59 | 0.1056 |
| 10 | 0.166760 | 6.03 | 0.004493 | 7.83 | 0.0957 |
| 11 | 0.174626 | 6.07 | 0.004860 | 7.55 | 0.0924 |

4th Order Runge-Kutta Numerical Method Results of Non-Linear System

| System | $x_{max}$ (inches) | Time (seconds) | $\theta_{max}$ (radians) | Time (seconds) | Maximum Acceleration (g's) |
|---|---|---|---|---|---|
| 1 | 0.064597 | 8.38 | 0.003358 | 9.02 | 0.0759 |
| 2 | 0.064839 | 5.38 | 0.003926 | 9.26 | 0.0792 |
| 3 | 0.206443 | 5.56 | 0.006035 | 9.24 | 0.1287 |
| 4 | 0.127281 | 5.72 | 0.006892 | 8.66 | 0.0726 |
| 5 | 0.032442 | 5.80 | 0.003891 | 8.72 | 0.0429 |
| 6 | 0.090984 | 5.78 | 0.002048 | 5.36 | 0.0825 |
| 7 | 0.110274 | 5.46 | 0.002467 | 5.86 | 0.0924 |
| 8 | 0.092031 | 5.98 | 0.002656 | 7.81 | 0.0759 |
| 9 | 0.194361 | 6.06 | 0.005075 | 7.59 | 0.1056 |
| 10 | 0.166763 | 6.03 | 0.004493 | 7.83 | 0.0957 |
| 11 | 0.174636 | 6.07 | 0.004859 | 7.55 | 0.0924 |

TABLE 7.5

Three Degree of Freedom Equation of Motion Response
Modal Analysis Method Results of Linear System

| System | $x_{max}$ (inches) | Time (sec.) | $y_{max}$ (inches) | Time (sec.) | $\theta_{max}$ (radians) | Time (sec.) | Maximum Acceleration (g's) |
|---|---|---|---|---|---|---|---|
| 1 | 0.067132 | 8.38 | 0.017698 | 5.68 | 0.003501 | 9.02 | 0.0792 |
| 2 | 0.061211 | 5.38 | 0.025181 | 8.06 | 0.003765 | 9.26 | 0.0759 |
| 3 | 0.207826 | 5.42 | 0.060041 | 5.64 | 0.006033 | 9.24 | 0.1287 |
| 4 | 0.122056 | 5.72 | 0.038540 | 5.64 | 0.006574 | 8.66 | 0.0693 |
| 5 | 0.032138 | 5.70 | 0.015215 | 5.38 | 0.003891 | 8.72 | 0.0429 |
| 6 | 0.090448 | 5.78 | 0.019865 | 5.32 | 0.002037 | 5.36 | 0.0825 |
| 7 | 0.105619 | 5.46 | 0.018550 | 6.68 | 0.002375 | 5.86 | 0.0891 |
| 8 | 0.091745 | 5.98 | 0.016424 | 5.36 | 0.002654 | 7.82 | 0.0759 |
| 9 | 0.201516 | 6.06 | 0.038773 | 5.80 | 0.005238 | 7.60 | 0.1089 |
| 10 | 0.161863 | 6.04 | 0.033516 | 5.38 | 0.004332 | 7.84 | 0.0924 |
| 11 | 0.179020 | 6.08 | 0.033861 | 5.40 | 0.005030 | 7.54 | 0.0957 |

4th Order Runge-Kutta Numerical Method Results of Linear System

| System | $x_{max}$ (inches) | Time (sec.) | $y_{max}$ (inches) | Time (sec.) | $\theta_{max}$ (radians) | Time (sec.) | Maximum Acceleration (g's) |
|---|---|---|---|---|---|---|---|
| 1 | 0.067373 | 8.38 | 0.017858 | 5.37 | 0.003504 | 9.02 | 0.0792 |
| 2 | 0.062228 | 5.39 | 0.025102 | 8.06 | 0.003761 | 9.27 | 0.0759 |
| 3 | 0.207015 | 5.43 | 0.059736 | 5.64 | 0.006304 | 9.25 | 0.1287 |
| 4 | 0.121529 | 5.73 | 0.038651 | 5.65 | 0.006577 | 8.67 | 0.0693 |
| 5 | 0.032442 | 5.81 | 0.014985 | 5.39 | 0.003891 | 8.79 | 0.0429 |
| 6 | 0.094623 | 5.78 | 0.019463 | 5.77 | 0.002130 | 5.37 | 0.0858 |
| 7 | 0.106292 | 5.47 | 0.018152 | 6.69 | 0.002378 | 5.87 | 0.0891 |
| 8 | 0.091996 | 5.99 | 0.016558 | 5.37 | 0.002656 | 7.82 | 0.0759 |
| 9 | 0.200428 | 6.06 | 0.039205 | 5.40 | 0.005233 | 7.60 | 0.1089 |
| 10 | 0.161009 | 6.04 | 0.033887 | 5.39 | 0.004338 | 7.84 | 0.0924 |
| 11 | 0.180863 | 6.08 | 0.034608 | 5.40 | 0.005033 | 7.55 | 0.0957 |

4th Order Runge-Kutta Numerical Method Results of Non-linear System

| System | $x_{max}$ (inches) | Time (sec.) | $y_{max}$ (inches) | Time (sec.) | $\theta_{max}$ (radians) | Time (sec.) | Maximum Acceleration (g's) |
|---|---|---|---|---|---|---|---|
| 1 | 0.067283 | 8.38 | 0.017858 | 5.37 | 0.003507 | 9.02 | 0.0792 |
| 2 | 0.062050 | 5.39 | 0.025102 | 8.06 | 0.003763 | 9.27 | 0.0759 |
| 3 | 0.206406 | 5.57 | 0.059736 | 5.64 | 0.006037 | 9.25 | 0.1287 |
| 4 | 0.121484 | 5.73 | 0.038651 | 5.65 | 0.006580 | 8.67 | 0.0693 |
| 5 | 0.032443 | 5.81 | 0.014985 | 5.39 | 0.003891 | 8.79 | 0.0429 |
| 6 | 0.094523 | 5.78 | 0.019463 | 5.77 | 0.002130 | 5.37 | 0.0858 |
| 7 | 0.106348 | 5.47 | 0.018152 | 6.69 | 0.002379 | 5.87 | 0.0891 |
| 8 | 0.091968 | 5.99 | 0.016558 | 5.37 | 0.002656 | 7.82 | 0.0759 |
| 9 | 0.200131 | 6.06 | 0.039205 | 5.40 | 0.005234 | 7.61 | 0.1089 |
| 10 | 0.160892 | 6.04 | 0.033887 | 5.39 | 0.004337 | 7.84 | 0.0924 |
| 11 | 0.180674 | 6.08 | 0.034608 | 5.40 | 0.005032 | 7.55 | 0.0957 |

### 7.3 Discussion of the Models and Associated Results

Both the modal analysis and the Runge-Kutta numerical methods give satisfactory results in determining the system maximum response in the various models and configurations. The maximum error in the comparison of the two methods for any given run is 5%. This is excellent when considering that each method has completely different basic concepts behind them. The modal anlysis method runs faster to obtain the result due to less computer operations. But, the Runge-Kutta method is much easicr to program into the computer and is more flexible. In all, both methods can be used to predict the seismic response of the linearized one, two and three degree of freedom models.

In the comparison of the one, two and three degree of freedom responses, certain conclusions can be drawn. The one degree of freedom model need only be used if system maximum rotational response is the main concern to drydock system design. This model gives results sufficiently close to the rotation generated by the other two models. Since vessel liftoff of the side block is the first block failure to be exhibited by the vessel-drydock system, the one degree of freedom model adequately predicts the maximum earthquake amplitude the system can withstand. Most of the vertical displacement at the side pier is due to rotation and not of relative vertical displacement as found in the three degree model. Hence, the one degree of freedom system response should be used to determine vessel roation and maximum earthquake amplitude.

-94-

The three degree of freedom system results should be used for a parameter study on block failure modes and for block design. This is because only the three degree model produces all required displacements for estimation of generated forces in both keel and side blocks. However, when the relative vertical translations generated are small, the two degree model can be used in block design,. The one degree model is truely inadequate for block design since crushing and vessel liftoff of the side blocks are the only failure modes.

The non-linear equations of motion mathematical models needs to be addressed. As shown in Table 7.3, 7.4 and 7.5, the non-linearity of the system caused less than 1% difference between the linear and non-linear responses. Under the eleven respresentative vessel-drydock configurations, the non-linear terms (ie. $\ddot{y}\theta$ and $\ddot{y}_g\theta$) should be removed from the equations of motion. This linearization of the equations of motion will be verified in the proceeding discussion.

The next step in the studying of the non-linearity of the system is to determine, when the non-linear terms mentioned earlier should be included in the equations of motion. The non-linear equation of motion for the one degree of freedom model is

$$\ddot{\theta} + \frac{c_\theta}{I_k} \dot{\theta} + \frac{k_1}{I_k} \theta \quad \frac{-M\,\overline{KG}}{I_k} \ddot{x}_g + \frac{M\,\overline{KG}}{I_k} \ddot{y}_g \, \theta$$

Let $\ddot{x}_g = a \sin t$

$\ddot{y}_G = \ddot{x}_g$

-95-
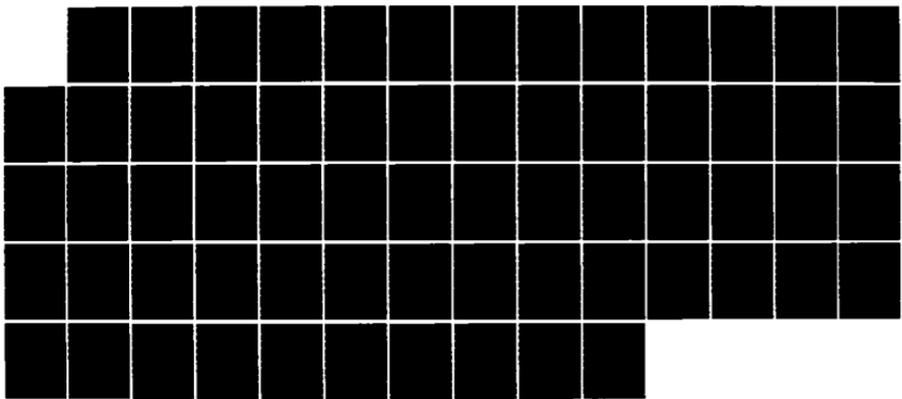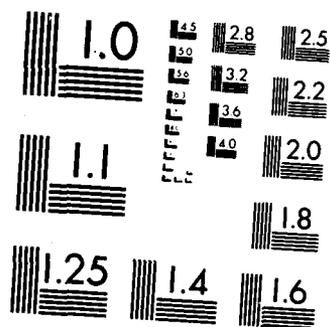
MICROCOPY RESOLUTION TEST CHART

NATIONAL BUREAU OF STANDARDS 1963 A

$$M \overline{KG} a/I_k = \beta$$

$$\lambda^2 = k_1/I_k$$

and $2\xi\lambda = C_\theta/I_k$.

Substituting and rearranging the Equation of motion gives

$$\ddot\theta + 2\xi\lambda\dot\theta + \lambda^2\theta = -\beta \sin\omega t(1 - \gamma\theta). \qquad (7.3.1)$$

where $\lambda$ = system natural frequency

$\beta$ = normalized maximum amplitude

$\gamma$ = ratio of vertical/horizontal amplitude.

Equation 7.3.1 not only represents the vessel-drydock system but any other system than can be reduced to this form. A parameter study is performed using $\lambda$, $\beta$ and $\gamma$ to determine whether or not to use non-linear terms in the equations of motion. The selection criterion will be when the non-linear response (ie. $\gamma \neq 0$) is different to the linear response (ie $\gamma = 0$) by 10%. If for a given $\lambda$, $\beta$ and $\gamma$ this criterion is exceeded, then the non-linear term, $\gamma\theta$, should be included. If not, exclude them. For this study, let $\omega$ = 3.92 rad/sec and $\xi$ = 0.05 to emulate the sinusoidal excitated system with 5% damping discussed in Section 7.1.3. Using a Runge-Kutta numerical scheme, Figures 7.14 a, b, c, d and e are generated by varying the three parameters. Note that a negative $\gamma$ indicates a phase shift of $180°$ between the vertical and horizontal sinusoidal excitation. The linearity selection criterion of 10% difference holds true for the region marked "N-L" for non-linear for a given $\beta$. In the case of the one degree of freedom vessel-drydock systems, the linearizing of the equations of motion can be shown on Figure 7.14b since $\beta \approx$ 0.5, $\gamma$ = 0.5 and $\lambda$ ranges from 2.870 rad/sec to 10.254 rad/sec

(Table 6.1).

In order to verify the linearity selection criterion, a linear point selected off of Figure 7.14b of $\beta = 0.5$, $\gamma = 5.58$ and $\gamma = 20.0$ is implemented into the Runge-Kutta computer program in Section 7.2. The nonlinear response equals 0.015839 radians compared to the linear response of 0.014741 radians when using the El Centro earthquake input. This is a difference of 7.5% which is less than 10%. The linearity selection criterion holds true. Now, a non-linear point of $\beta = 0.5$, $\lambda = 8.327$ and $\gamma = 15.0$ is implemented into the Runge-Kutta scheme. The non-linear and linear responses are .009652 and .008664, respectively. This is a difference of 11.4% which is greater than 10%. The linearity selection criterion is validated. Thus, vessel-drydock system should be checked before selection of linear or non-linear models.

As mentioned earlier, Equation 7.3.1 can be used to validate systems other than the vessel-drydock systems subjected to sinusoidal ground acceleration whose frequency matches that of the El Centro earthquake, ie. $\omega = 3.92$ rad/sec. this can be done by modifying the appropriate linearity selection criteria figure with

$$\lambda_1 = \lambda/3.92$$

and replotting the figure. This essentially changes Equation 7.3.1 into a ron-dimensional of

$$\ddot{\theta}_1 + 2\xi\lambda_1\dot{\theta}_1 + \lambda_1{}^2\ \theta_1 = -\beta_1\ sint_1\ (1 - \gamma_1\theta_1)$$

where
$$\ddot{\theta}_1 = \ddot{\theta}/\omega^2$$
$$\dot{\theta}_1 = \dot{\theta}/\omega$$

$$\theta_1 = \theta$$

$$\lambda_1 = \lambda/\omega$$

$$\beta_1 = \beta/\omega^2$$

$$\gamma_1 = \gamma$$

$$t_1 = \omega t$$

and in this case, $\omega = 3.92$ rad/sec.
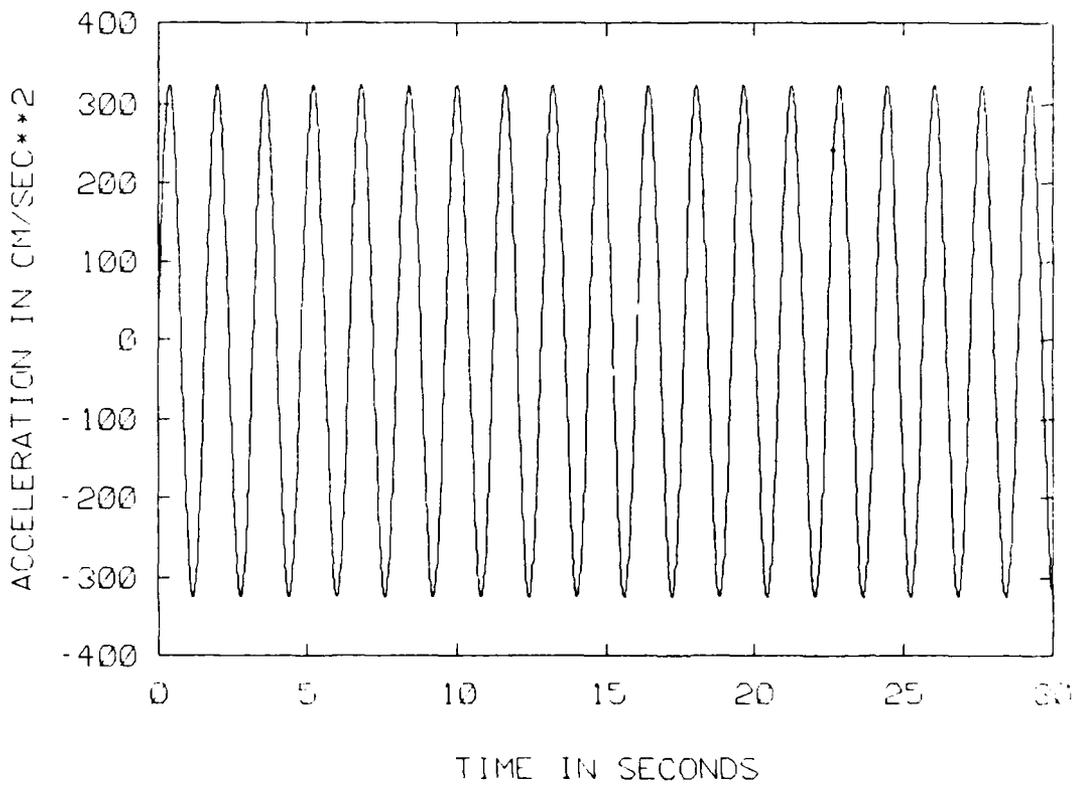
**FIGURE 7.1**
Sinusoidal Ground Acceleration
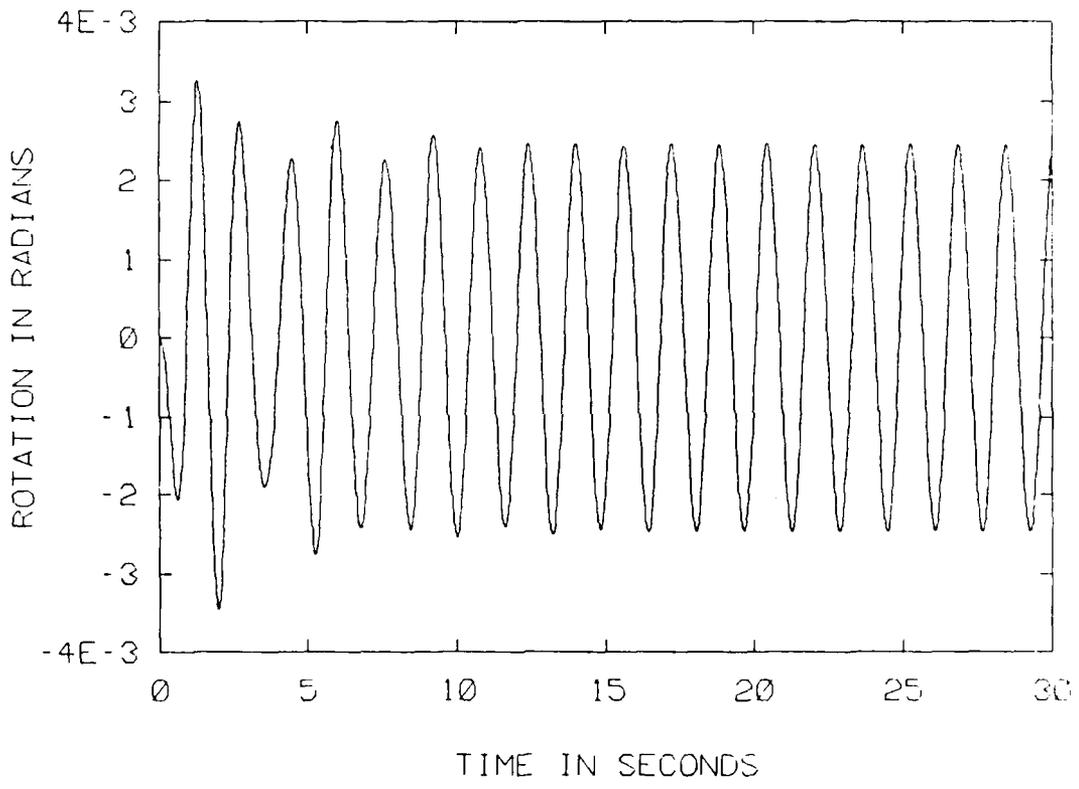
**FIGURE 7.2**
Vessel Seismic Response in Rotation using Modal Analysis with
Sinusoidal Ground Acceleration

-100-
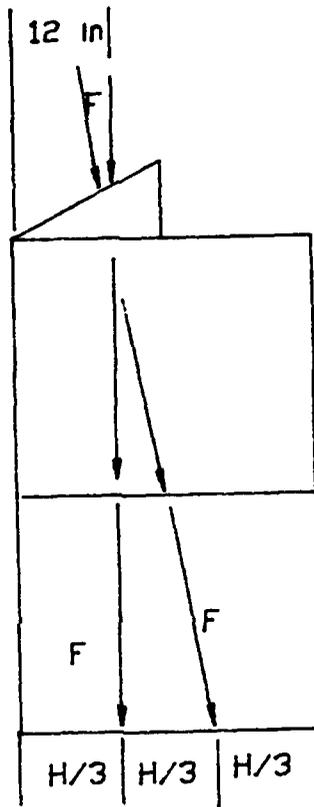
FIGURE 7.3
Side Pier Forces, with Softwood Cap Block
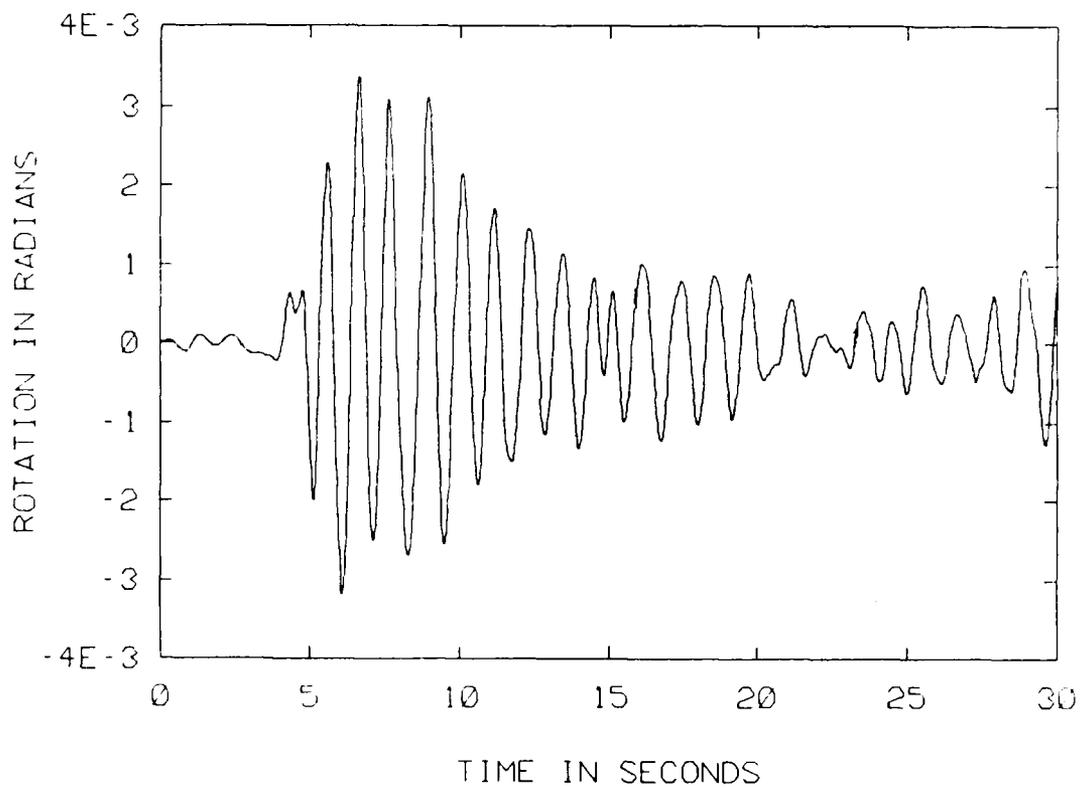
**FIGURE 7.4**
Vessel Seismic Response in Rotation for One Degree of Freedom
Model using Modal Analysis

-102-
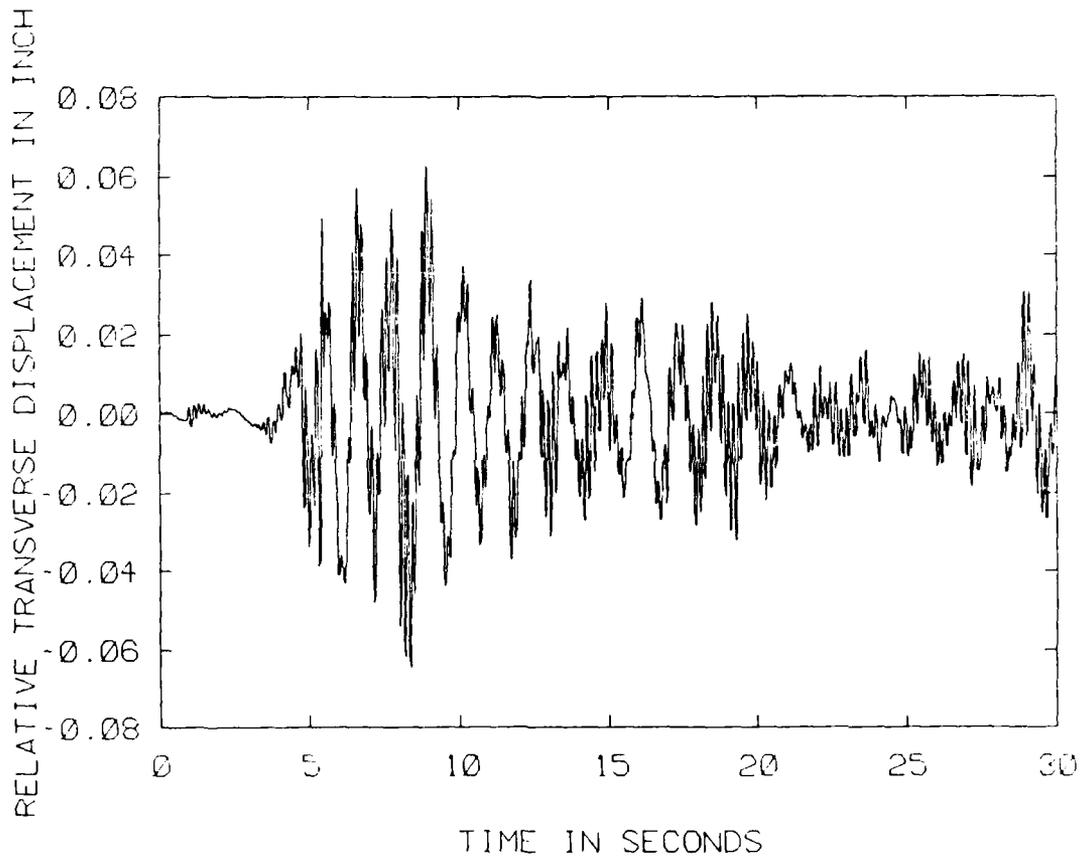
**FIGURE 7.5a**
Vessel Seismic Response in Relative Horizontal Translation for
Two Degree of Freedom Model using Modal Analysis
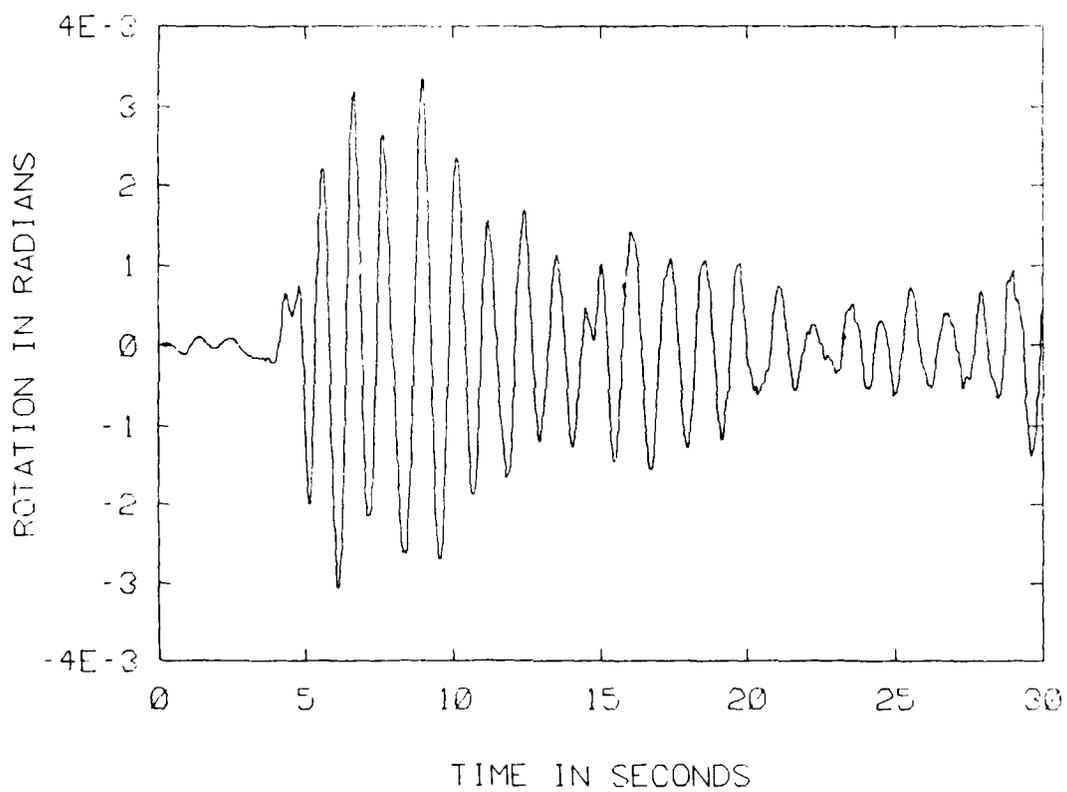
**FIGURE 7.5b**
Vessel Seismic Response in Rotation for Two Degree of Freedom
Model using Modal Analysis
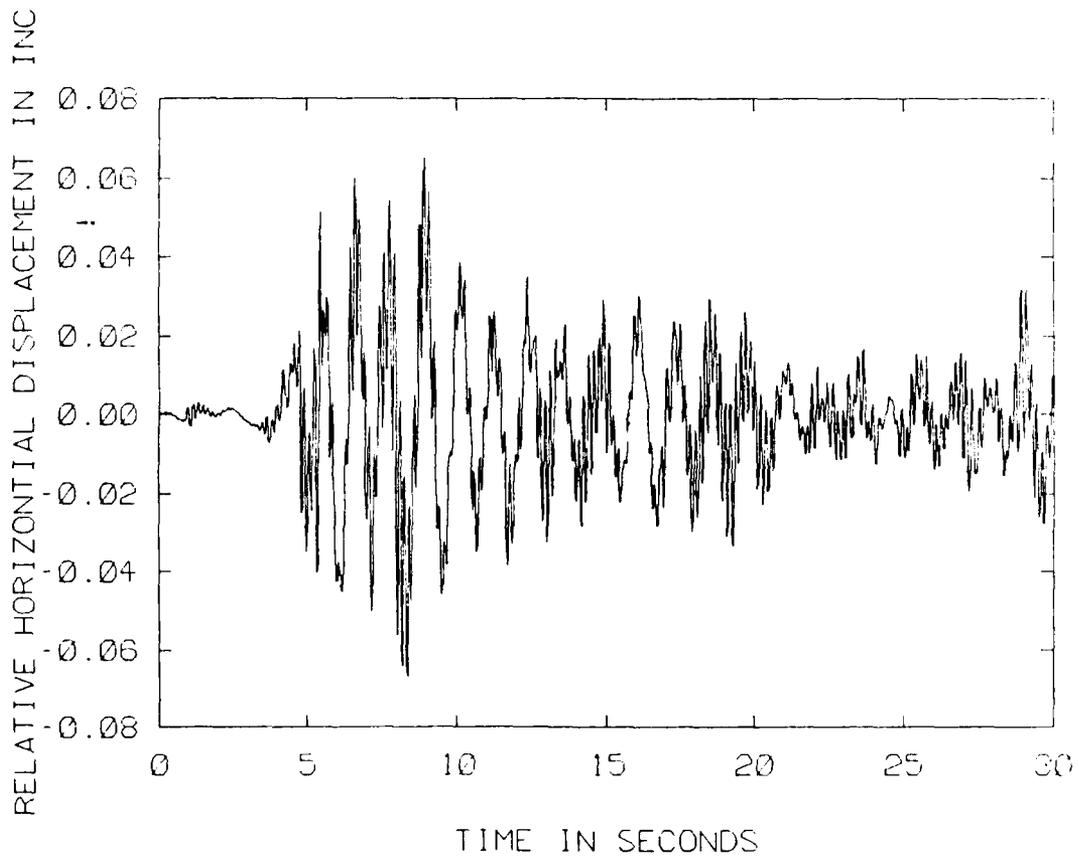
**FIGURE 7.6a**
Vessel Seismic Response in Relative Horizontal Translation for
Three Degree of Freedom Model using Modal Analysis
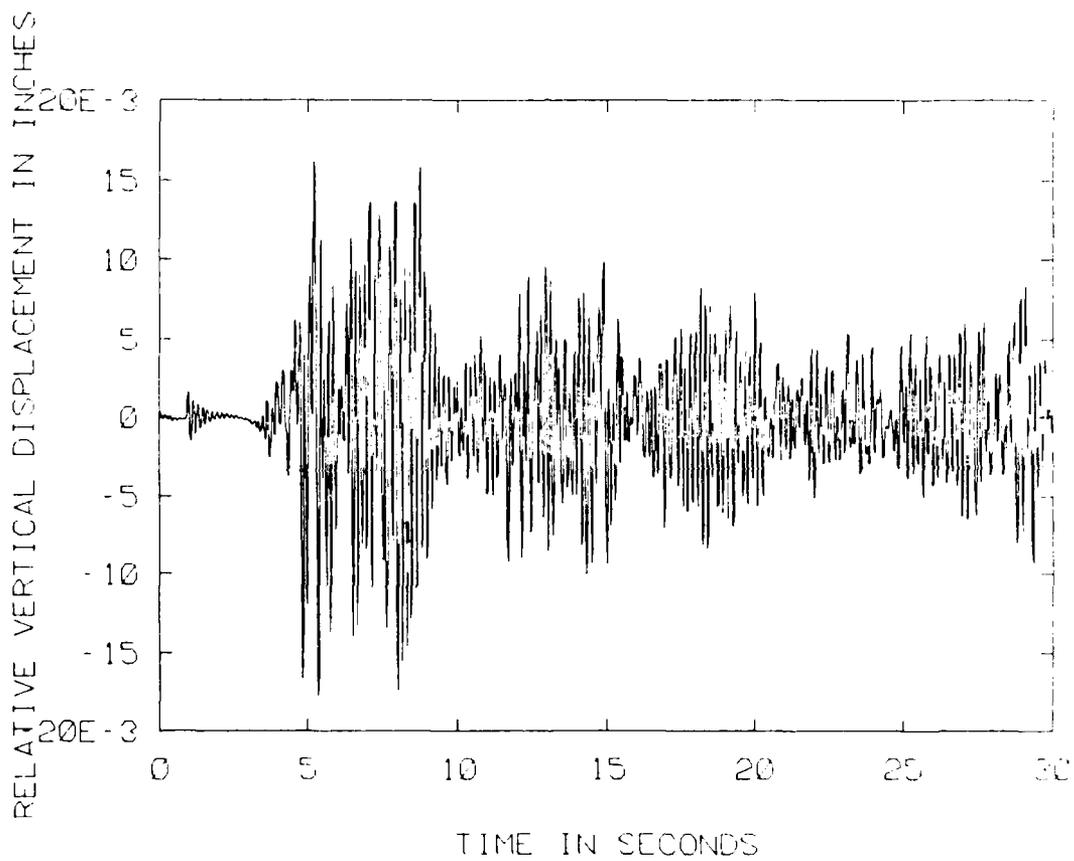
**FIGURE 7.6b**
Vessel Seismic Response in Relative Vertical Translation for
Three Degree of Freedom Model using Modal Analysis
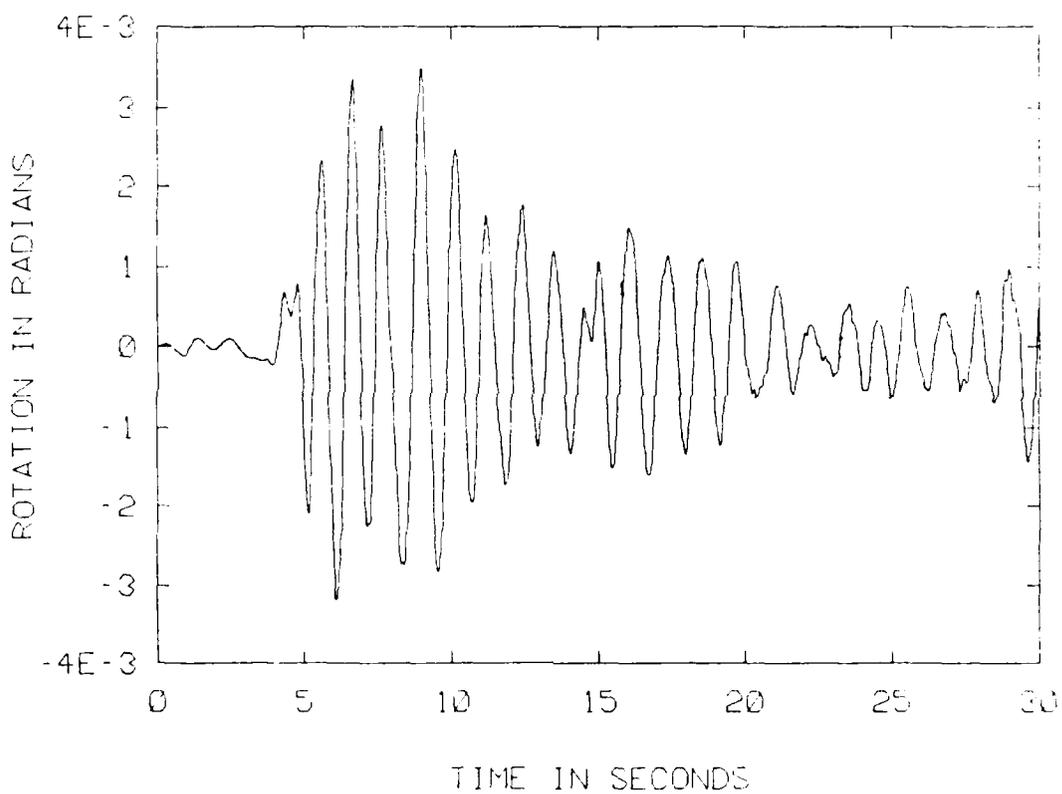
**FIGURE 7.6c**
Vessel Seismic Response in Rotation for Three Degree of
Freedom Model using Modal Analysis

-107-
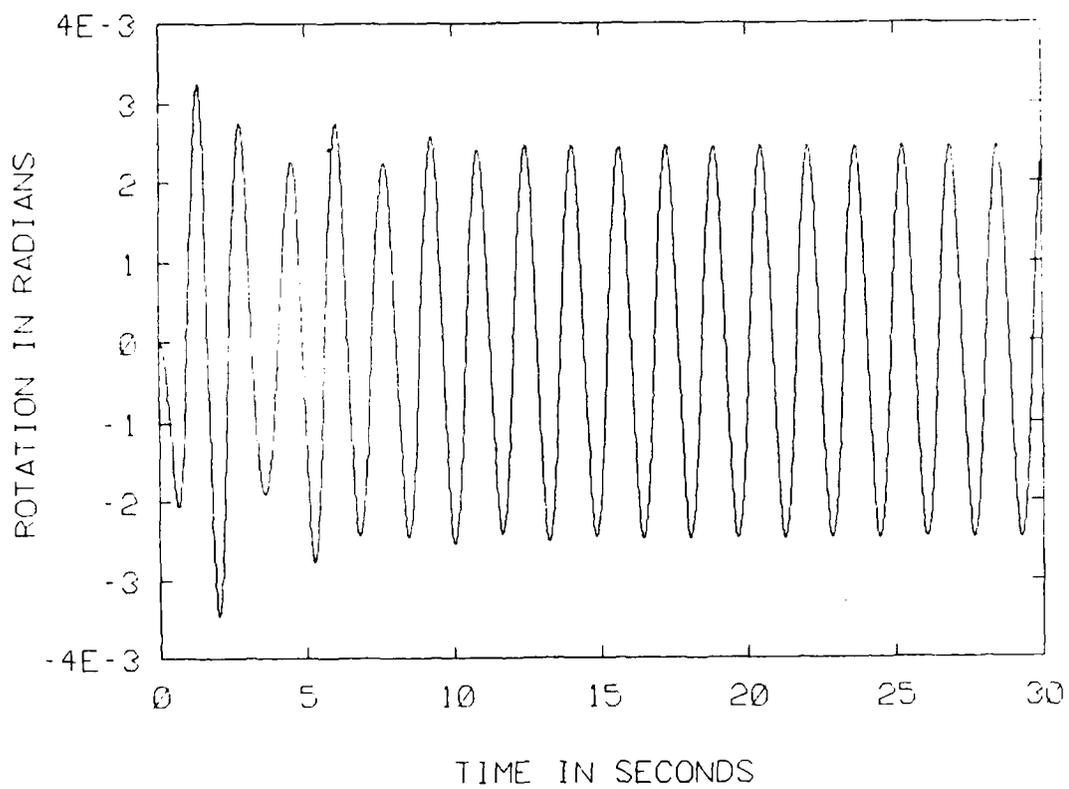
**FIGURE 7.7**
Vessel Seismic Response in Rotation using Runge-Kutta
Numerical Analysis with Sinusoidal Ground Acceleration

-108-
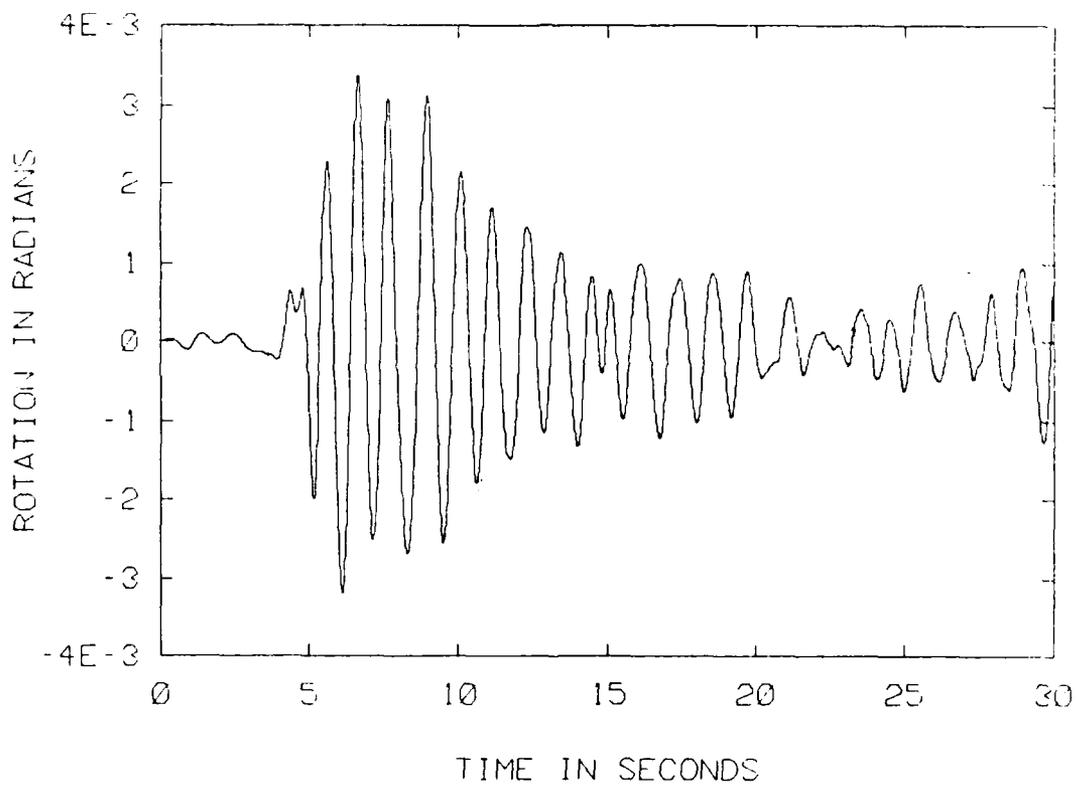
**FIGURE 7.8**
Vessel Seismic Response in Rotation for One Degree of Freedom
Model using Runge-Kutta Analysis
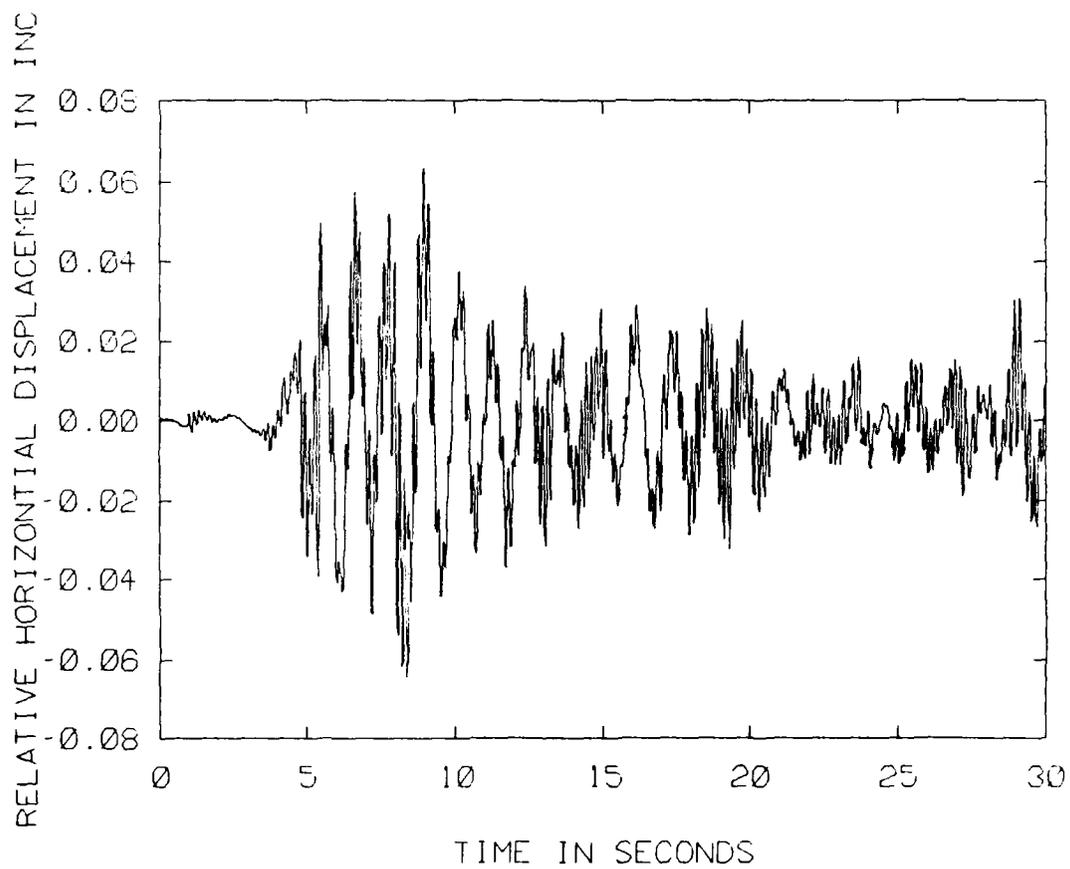
**FIGURE 7.9a**
Vessel Seismic Response in Relative Horizontal Translation for
Two Degree of Freedom using Runge-Kutta Analysis
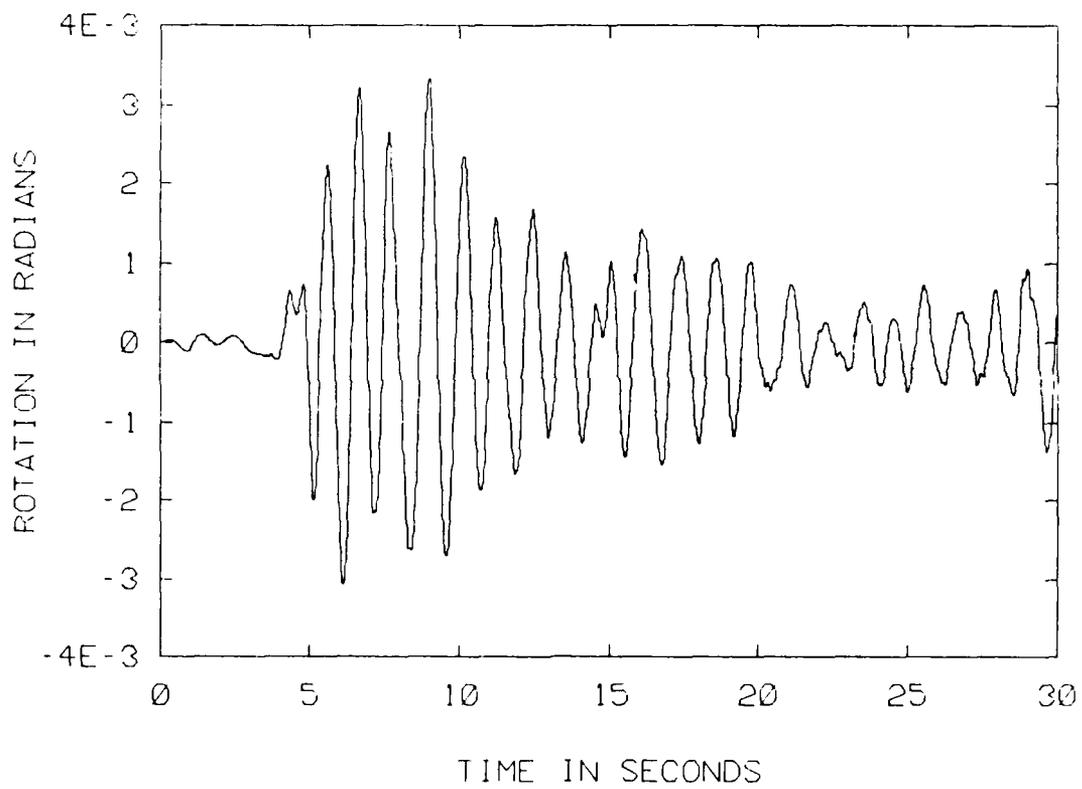
**FIGURE 7.9b**
Vessel Seismic Response in Rotation for Two-Degree of Freedom
Model using Runge-Kutta Analysis

-111-
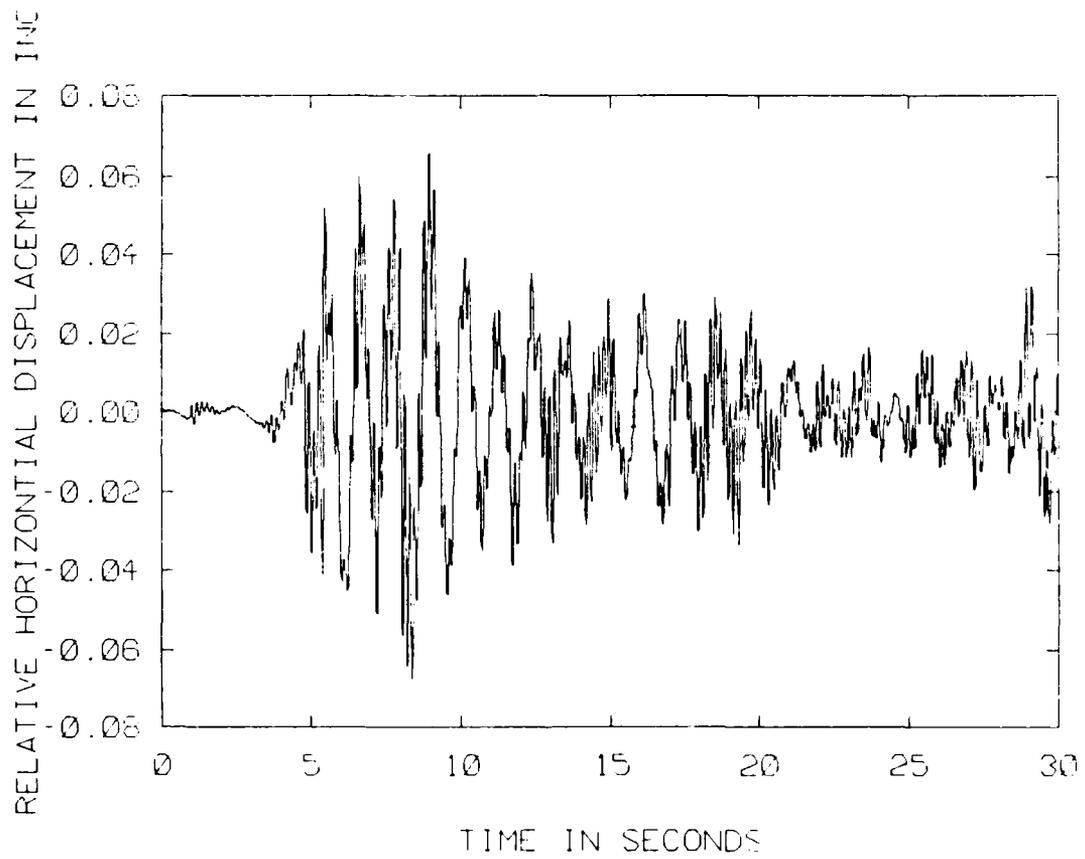
**FIGURE 7.10a**
Vessel Seismic Response in Relative Horizontal Translation for
Three Degree of Freedom Model using Runge-Kutta Analysis
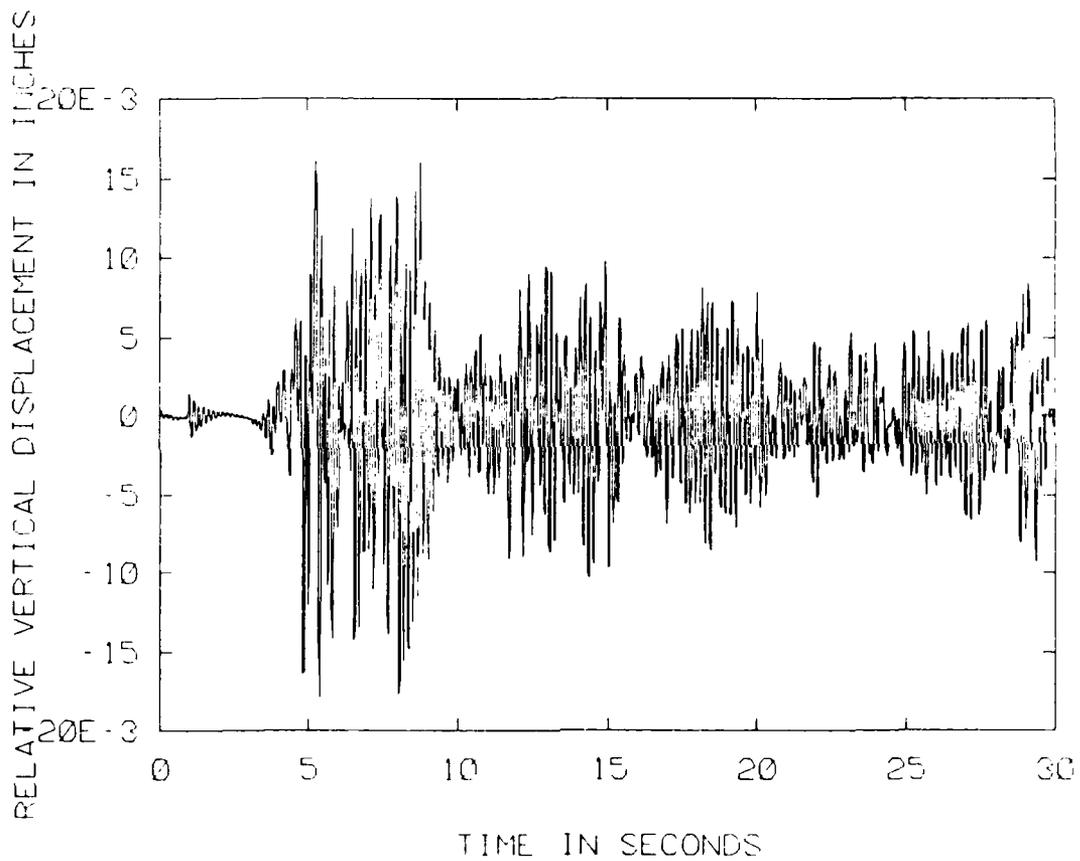
FIGURE 7.10b
Vessel Seismic Response in Relative Vertical Translation for
Three Degree of Freedom Model using Runge-Kutta Analysis

-113-
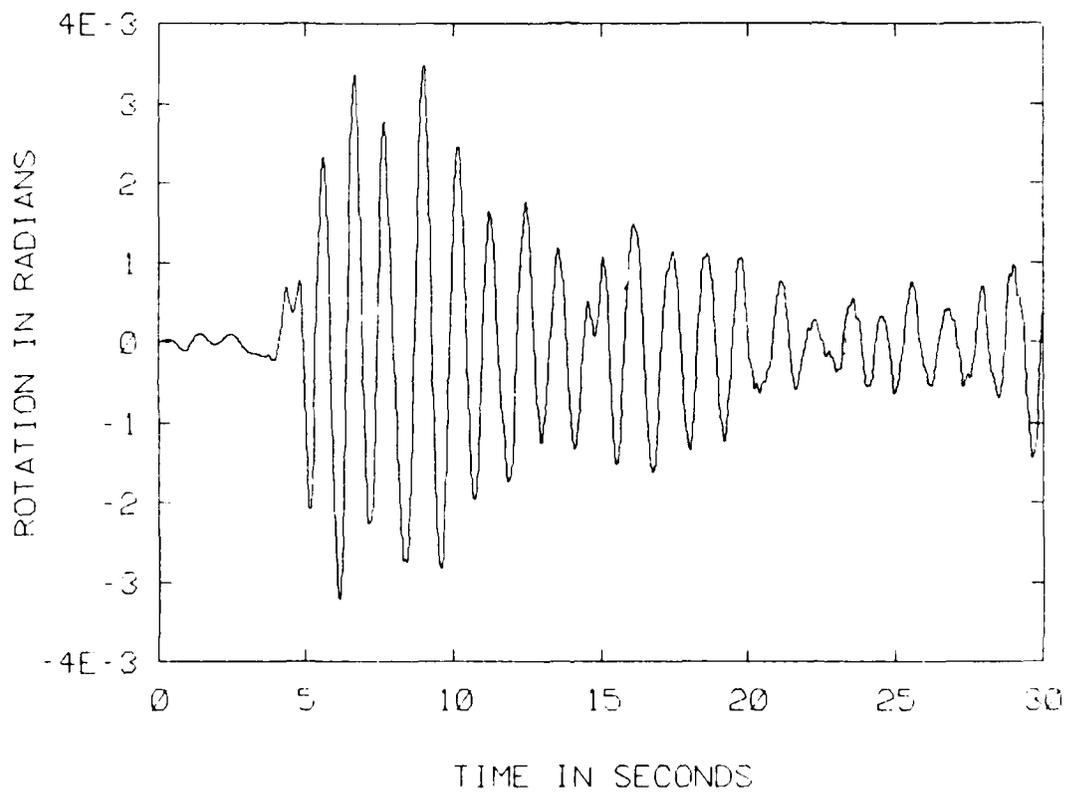
**FIGURE 7.10c**
Vessel Seismic Response in Rotation for Three Degree of
Freedom Model using Runge-Kutta Analysis
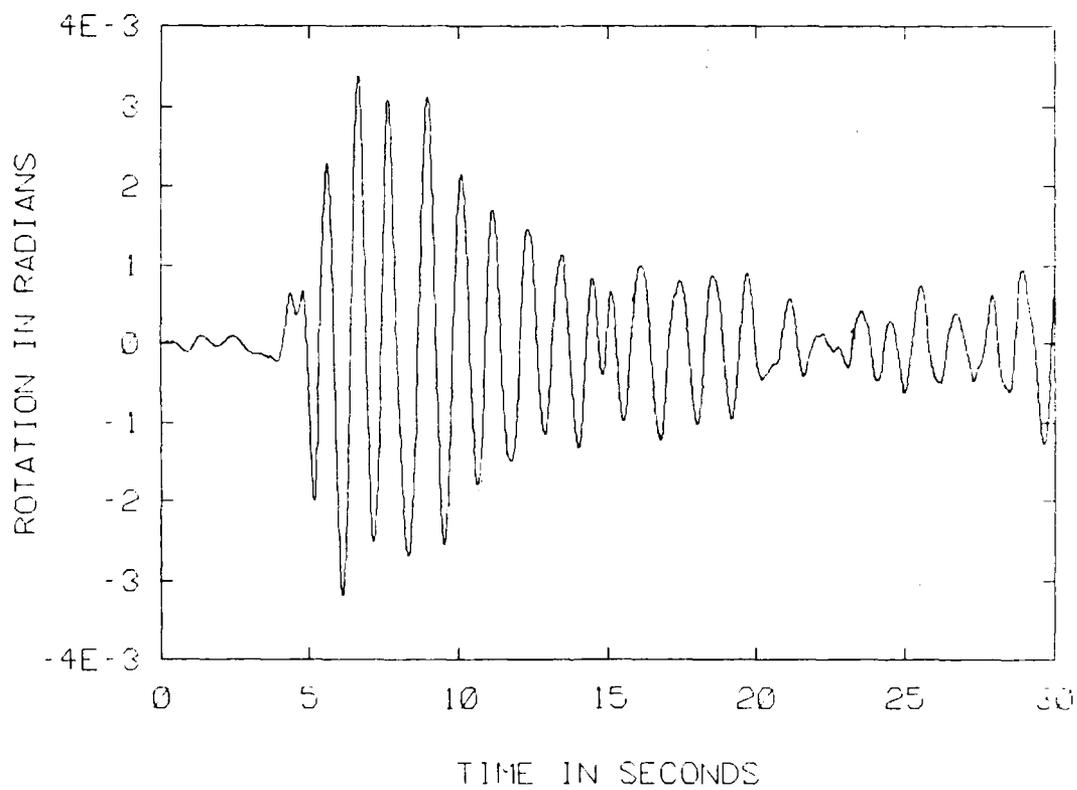
**FIGURE 7.11**
Vessel Seismic Response in Rotation for Non-Linear One Degree
of Freedom Model using Runge-Kutta Analysis
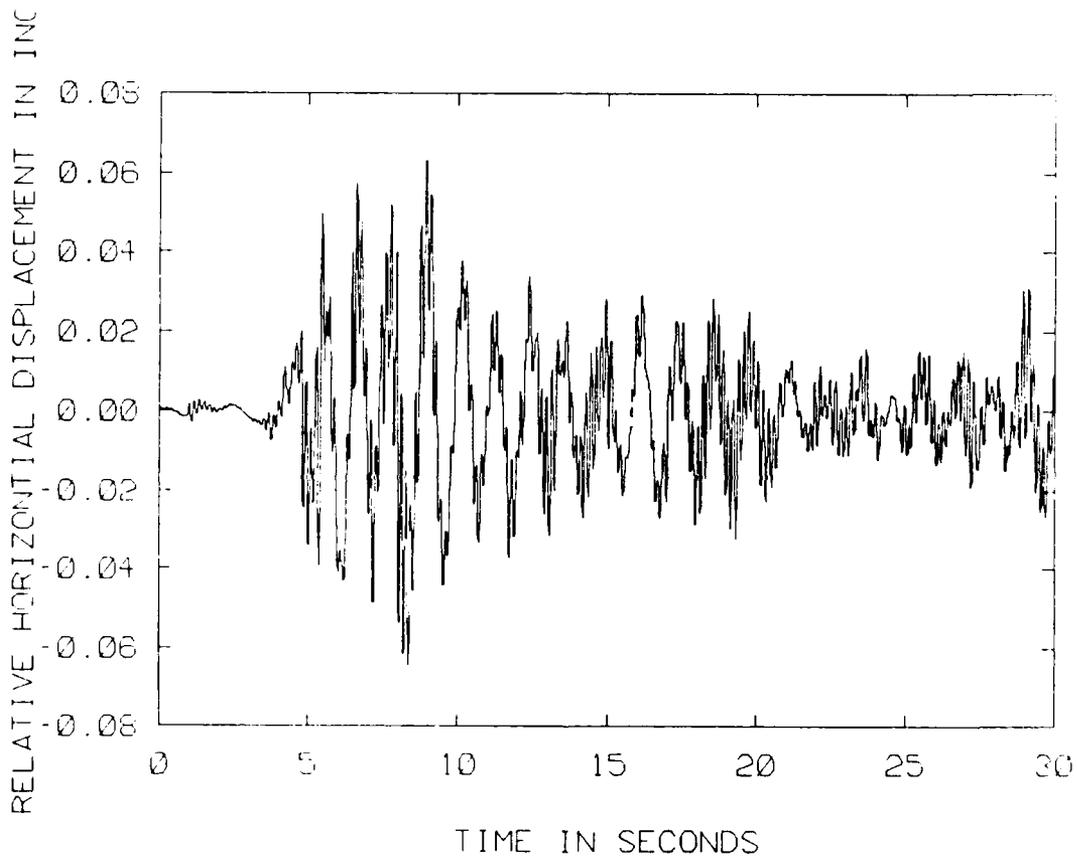
**FIGURE 7.12a**
Vessel Seismic Response in Relative Horizontal Translation
for Non-linear Two Degree of Freedom Model using Runge-Kutta
Analysis
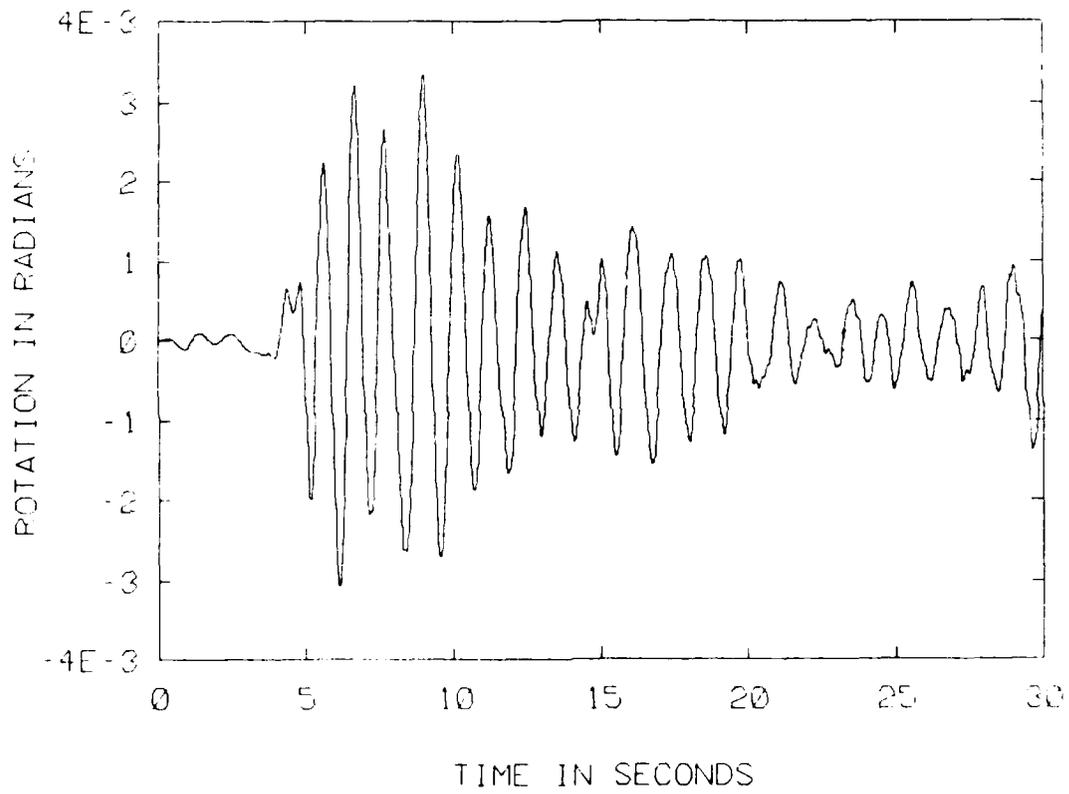
**FIGURE 7.12b**
Vessel Seismic Response in Rotation for Non-linear Two Degree
of Freedom Model using Runge-Kutta Analysis
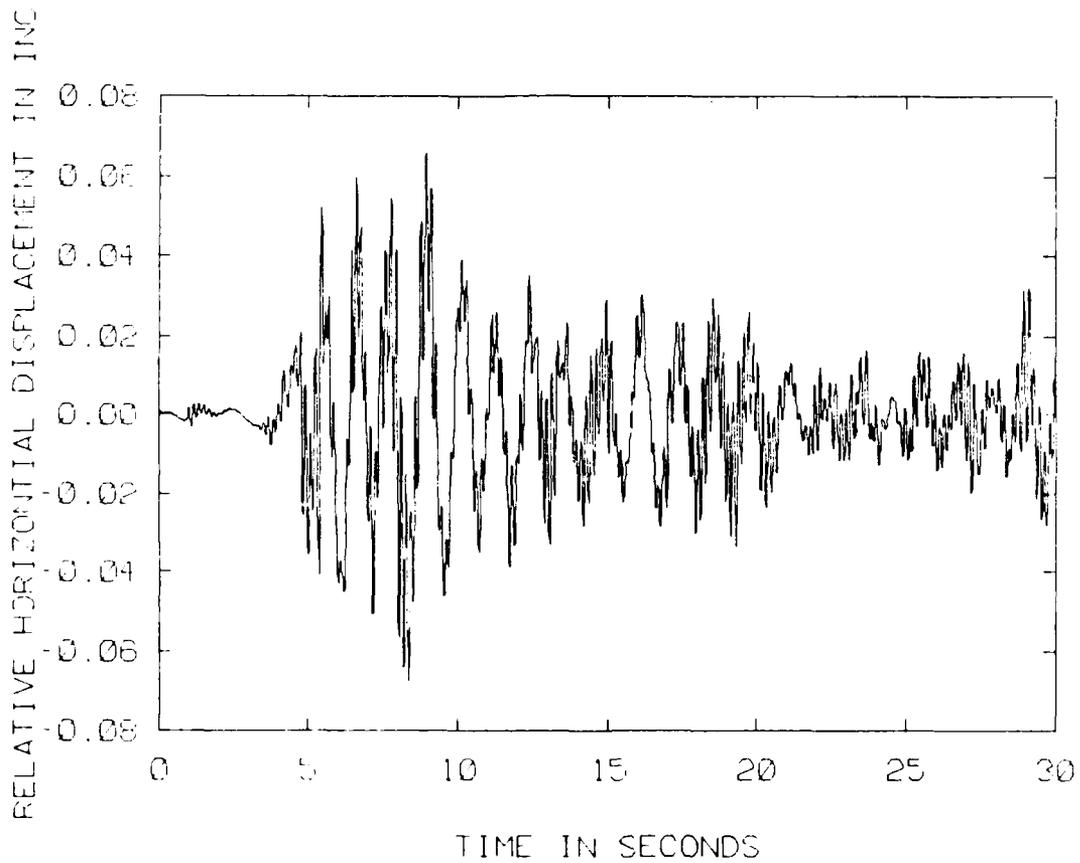
**FIGURE 7.13a**
Vessel Seismic Response in Relative Horizontal Translation
for Non-linear Three Degree of Freedom Model using Runge-
Kutta Analysis

-118-
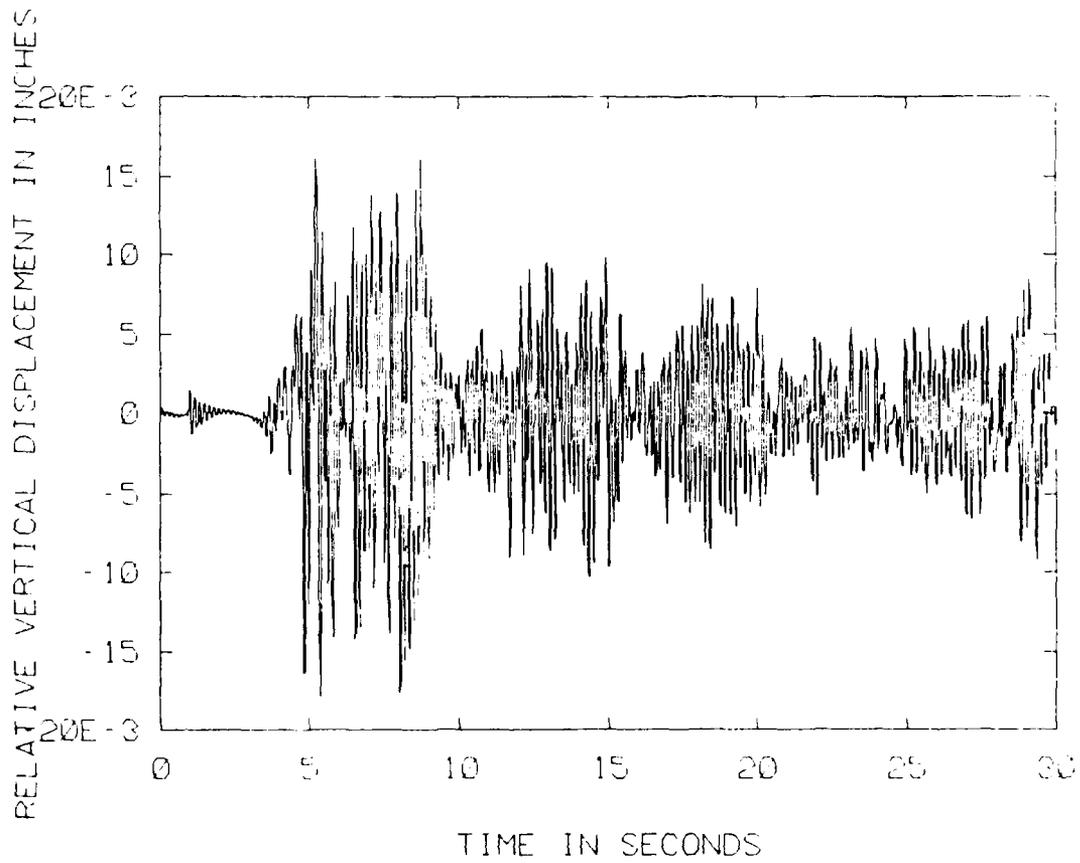
FIGURE 7.13b
Vessel Seismic Response in Relative Vertical Translation for
Non-linear Three Degree of Freedom Model using Runge-Kutta
Analysis
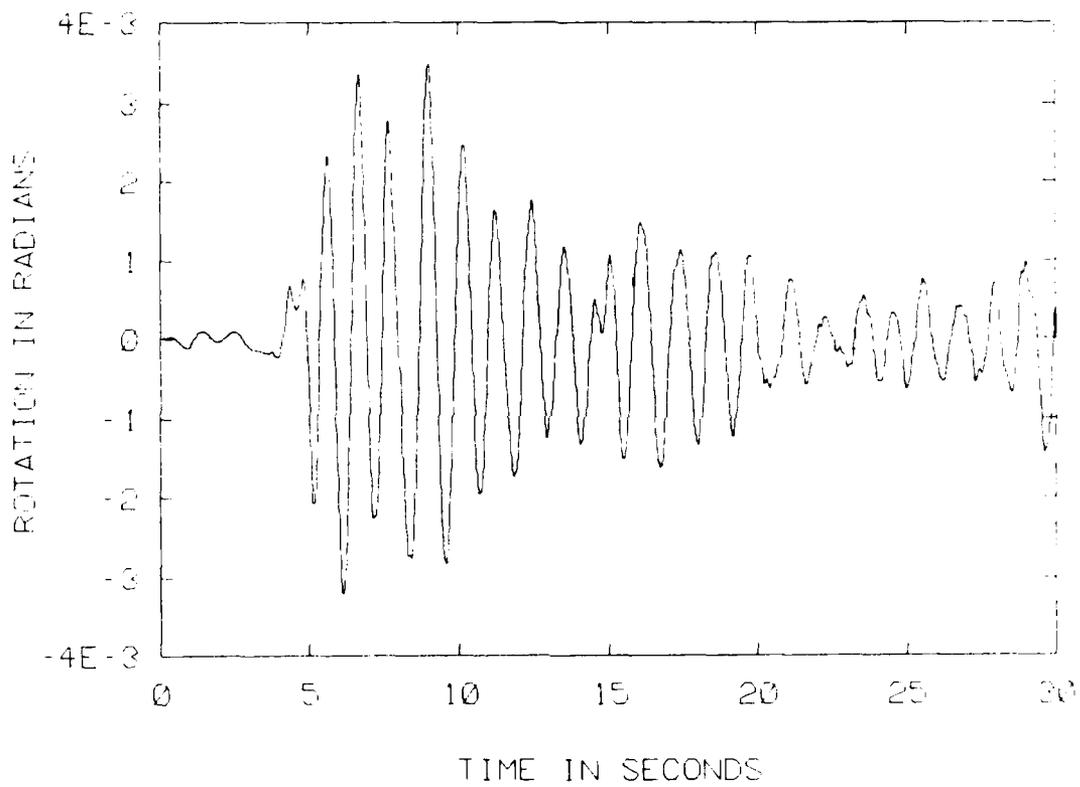
**FIGURE 7.13c**
Vessel Seismic Response in Rotation for Non-linear Three
Degree of Freedom Model using Runge-Kutta Analysis

## LINEARITY SELECTION CRITERIA
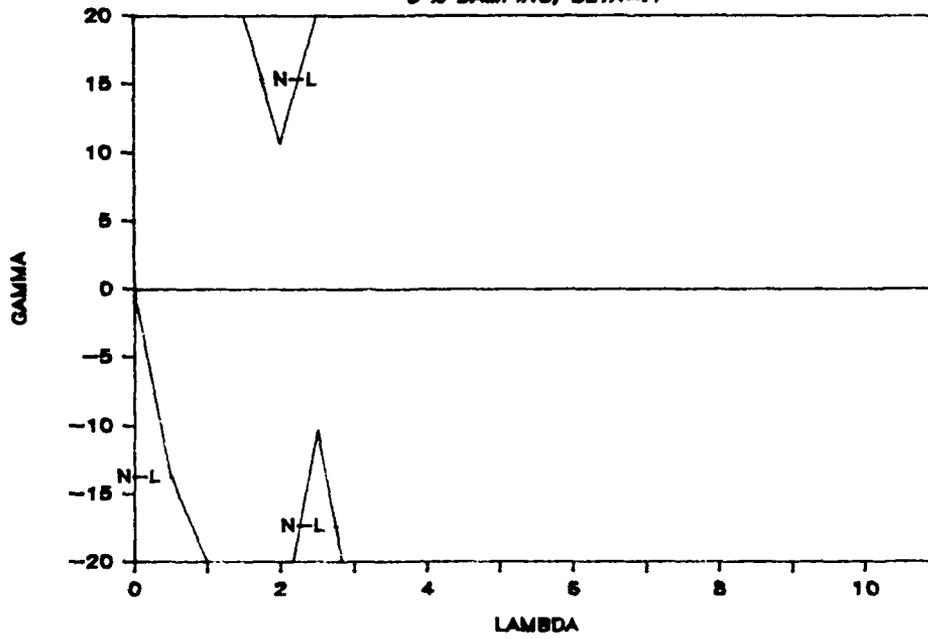
### 5 % DAMPING, BETA=.1



FIGURE 7.14a
Linearity Selection Criteria, 5% Damping, Bet = 0.1

## LINEARITY SELECTION CRITERIA
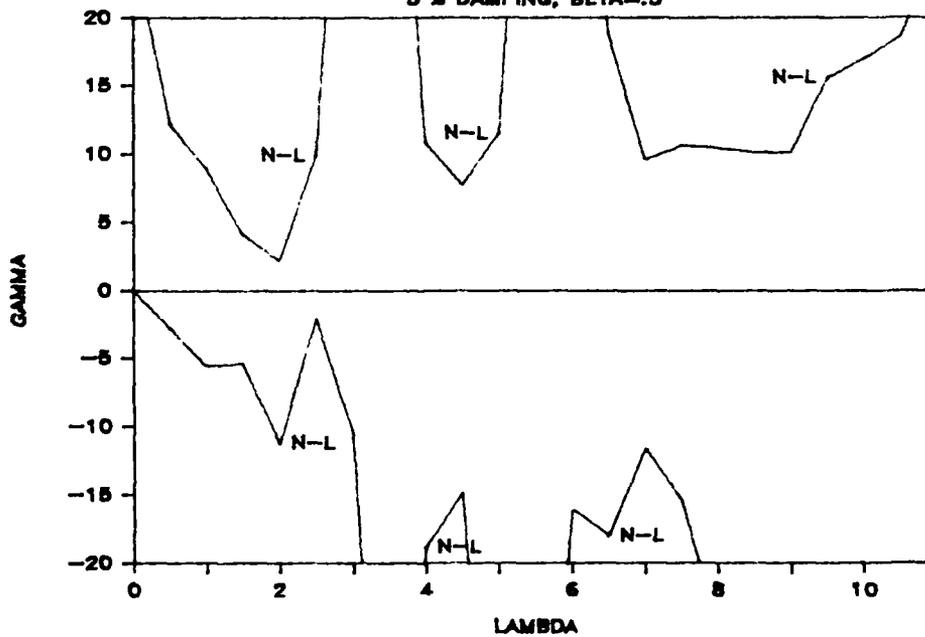
### 5 % DAMPING, BETA=.5



FIGURE 7.14b
Linearity Selection Criteria, 5% Damping, Beta = 0.5

# LINEARITY SELECTION CRITERIA
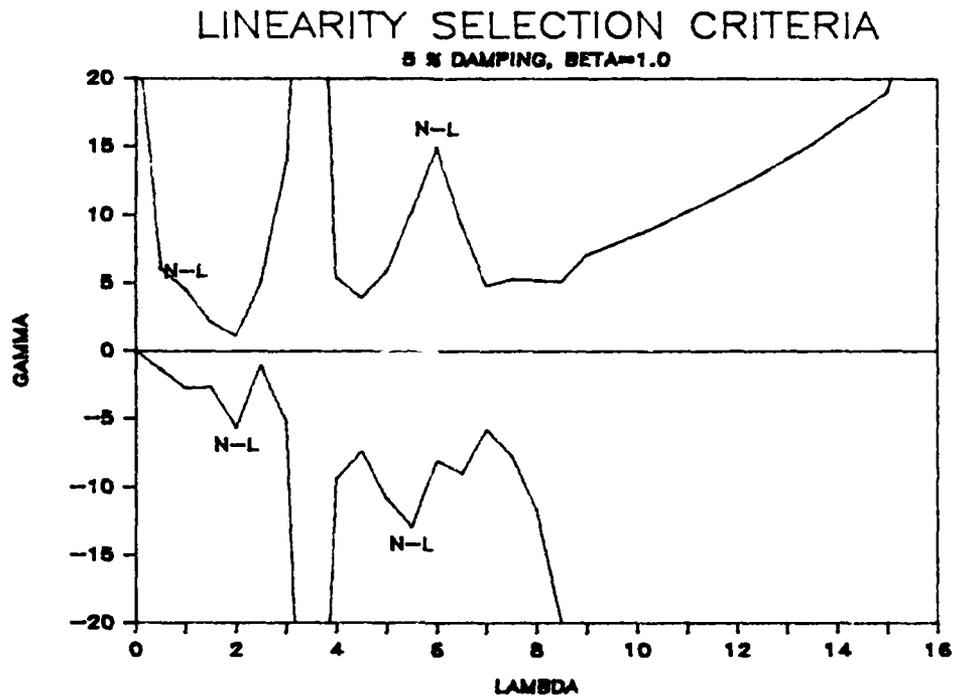
### 5 % DAMPING, BETA=1.0



**FIGURE 7.14c**
Linearity Selection Criteria, 5% Damping, Beta = 1.0

# LINEARITY SELECTION CRITERIA
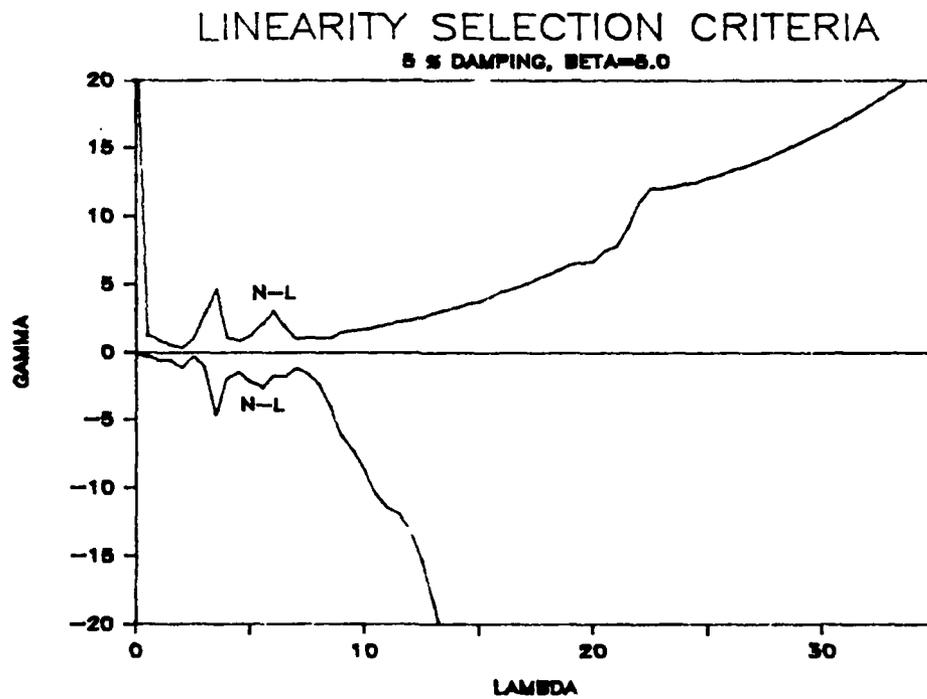
### 5 % DAMPING, BETA=5.0



**FIGURE 7.14d**
Linearity Selection Criteria, 5% Damping, Beta = 5.0

-122-
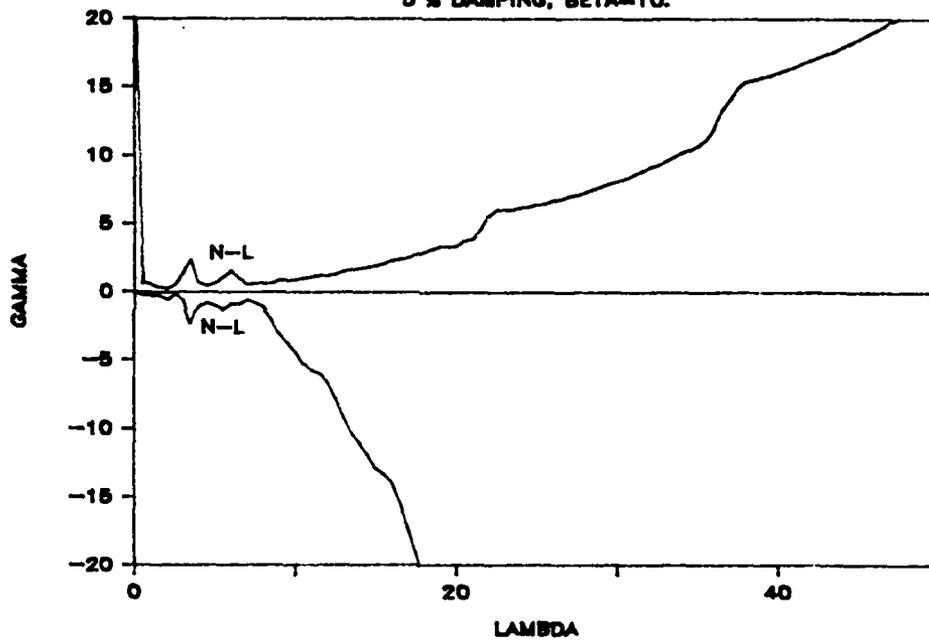
FIGURE 7.14e
Linearity Selection Criteria, 5% Damping, Beta = 10.0

## 8.0 SUMMARY, CONCLUSIONS, AND RECOMMENDATIONS FOR FURTHER STUDY

### 8.1 Summary

This thesis investigates four models of the vessel-drydock system for seismic analysis. These models are implemented to determine vessel response to seismic loading for eleven representative submarine-drydock systems. Using Equation 4.1.4, the quasi-static force model generates various vessel responses listed on Tabe 6.2. For example, the submarine in system #1 will rotate about its keel 0.00809 when subjected to a strong earthquake. The one degree of freedom model predicts a maximum vessel rotation for system #1 of 0.01471 radians in response to the El Centro earthquake ground acceleration history. This rotation of 0.01471 radians is verified by the two and three degree of freedom models. See Tables 7.2 and 7.3. This maximum seismic response of system #1 can also be confirmed by the response spectrum method as described in Section 6.3 and reference [1]. The response spectrum method gives the rotation as 0.01594 radians. All eleven systems have similar differences between the quasi-static force model and the various degree of freedom models.

More important than the maximum vessel response due to the El Centro earthquake of .33g magnitude is the maximum permissible earthquake acceleration that a vessel-drydock can withstand without failure. The maximum permissible accelerations and associated vessel responses for the one, two and three degree of freedom are listed in Table 7.3, 7.4 and 7.5, respectively. For example, the one degree of freedom

-124-

model for system #1 predicts a maximum permissible acceleration of 0.0759 g's with maximum vessel rotation of 0.00339 radians. The two degree of freedom determines a maximum permissible acceleration equalling .0759 g's with maximum vessel rotation and relative horizontal displacement of 0.003358 radians and 0.064566 inches, respectively. Finally, the maximum permissible acceleration of 0.0792 g's with associated vessel responses (rotation, relative horizontal and vertical displacements) of 0.003504 radians, 0.067373 inches, and 0.017858 inches. The slightly higher maximum permissible acceleration found in three degree model is due to the beneficial effect of the vertical displacement delaying failure of the system. However, as shown by the other systems, this is not always the case. In summary, the range of magnitudes known as maximum permissible accelerations that the eleven systems could withstand without liftoff is 13% to 42% of the magnitude of the El Centro earthquake depending on system and model used.

### 8.2 Conclusions

The quasi-static method currently used by the U.S. Navy for seismic response analysis underestimates the block forces caused by an earthquake the magnitude of the El Centro earthquake. The one degree of freedom model adequately predicts the vessel rotational response to seismic loading but is ineffective in the analysis of possible failures to the vessel-drydock system. The two degree of freedom model does a good job of predicting vessel rotational and horizontal translation response to seismic loading provided the response

-125-

due to vertical acceleration is small, which is the case for the eleven systems analyzed. Finally, the three degree of freedom model predicts the vessel rotational, horizontal, and vertical translation responses and can be used to completely investigate various types of failure to the vessel-drydock system in all eleven vessel-drydock systems examined. The vessel would experience side pier liftoff failure during an earthquake with the magnitude of the El Centro earthquake (ie. 0.33 g's). The various vessel-drydock systems would not remain intact during this magnitude of earthquake. Also noted that the fourth order Runge-Kutta numerical scheme should be used to evaluate system response because of its simplicity, results accurancy, and ease of introducing terms into the Equation of motion.

8.3   Recommendations for Further Study

The seismic response of drydocked vessels needs further investigation in three areas. First, a three degree of freedom model which will allow vessel liftoff should be studied so that other failure mode will occur. Second, a study of the vessel-drydock system parameters needs to be carried out to explore ways in which drydocked vessel seismic response can be decreased. Third, an in depth study of the drydock block itself in order to provide failure modes along with stiffness and damping characteristics for implementation into mathematical models.

# REFERENCES

1.  Barker, Charles, F., "The Response of Drydocked Ships to Seismic Loading", MIT Thesis, May 1985.

2.  Biggs, John M., _Introduction to Structural Dynamics_, McGraw-Hill, Inc., New York, NY 1964.

3.  Clough, Ray W., Penzien, Joseph, _Dynamics of Structures_, McGraw-Hill, Inc., New York, NY 1975.

4.  International Mathematical and Statistical Library, Reference Manual Edition 9, 1982, IMSL, Houston, TX.

5.  U.S. NAVY, NAVSEA Technical Manual, CH. 997 R1.

6.  U.S. Navy, "Proposed Military Standard, Drydock Blocking Systems, Requirements for", prepared for NAVSEA by Gibbs and Cox, Inc., 31 July 1983.

7.  Newmark, Nathan M., Rosenblueth, Emilio, _Fundamentals of Earthquake Engineering_, Prentice-Hall Inc., Englewood Cliffs, NJ, 1971.

8.  Schrid, Francis, _Theory and Problems of Numerical Analysis_, Schaum's Outline Series, McGraw-Hill Book Co., New York, NY 1968.

9.  Sunder, S. Shyam, Conner, Jerome J., "A New Procedure for Processing Strong-Motion Earthquake Signals", _Bulletin of the Seismological Society of America_, Vol. 72, No. 2, April, 1982, pp. 643-661.

10. Thomson, William T., _Theory of Vibration with Applications_, Prentice-Hall, Inc., Englewood Cliffs, NJ, 1972.

11. Timoshenko, S., _Strength of Materials, Part 1_, Robert E Krieger Publishing Co., Inc., Huntington, NY, 1955, reprinted 1976.

12. Timoshenko, S., _Vibration Problems in Engineering_, D. Van Nostrand Co., Inc., NY, Third Ed., 1955.

13. Tse, Francis S., Morse, Ivan E., Hinkle, Rolland T., _Mechanical Vibrations, Theory and Applications_, Second Edition, Allyn and Bacon, Inc., Boston, MA, 1978.

14. Viscomi, B. Vincent, "A Method of Predicting the Seismic Rotational Response of Submarines in Graving Drydocks", Structural Integrity Division, Ship Design and Integration Directorate, NAVSEA, U.S. Navy, Sept. 1981.

```
C       LINEARIZED THREE DEGREE OF FREEDOM SYSTEM RESPONSE USING
C        MODAL ANALYSIS METHOD

        integer ia,ib,ic,l,mm,n,ijob,iz,ier,hull,nsys,flag10
        integer flag1,flag2,flag3,flag4,flag5,flag6,flag7,flag8
        real a(6,6),b(6,6),beta,wk(72),weight,h,Ik,gravity
        real m(3,3),cx(3,3),k(3,3),sidearea,keelarea,plside
        real baseside,basekeel,htside,htkeel,crit1,crit2,crit3
        real an(6,6),ac(6000),dtau,maxx,maxt,maxy,timex,timet
        real rf1,rf2,rf3,hf1,hf2,hf3,ampacc,mass,ampacmax
        real kvs,kvk,khs,khk,base,ht,counter
        real time1,time2,time3,time4,time5,time6,time7,time8
        real x(6000),t(6000),y(6000),ri(7),si(7),pi(7),XSCL(6)
        real bbb,ccc,w12,w1,w22,w2,w32,w3,mode1,mode3,capwidth
        real mmx1,mmang1,mmx3,mmang3,br,amp,plkeel,crit4,ul,u2
        real timey,mmmmm1,mmmmm2,mmmmm3,mmmmm4
        complex alfa(6),z(6,6),ad(6,6),bd(6,6),aa(6,6),bb(6,6)
        complex g(6),v(6),yy(6,6000),ABC(6),zt(6,6),beta1

        CHARACTER*40 XLABEL,YLABEL,YYLABEL,YYYLABEL,DEC




C       READ IN VESSEL AND DRYDOCK DATA; VESSEL WEIGHT,KG,I(ABOUT KEEL),
C       TIME INCREMENT OF DATA POINTS,VERTICAL STIFFNESS OF SIDE AND
C       KEEL PIERS,HORIZONTAL STIFFNESS OF SIDE AND KEEL PIERS,
C       GAVITATIONAL CONSTANT,SIDE BLOCK BASE AND HEIGHT,
C       KEEL BLOCK BASE AND HEIGHT,
C       BLOCK-BLOCK AND BLOCK-HULL FRICTION COEFFICIENTS,
C       SIDE AND KEEL BLOCK'S PROPORTIONAL LIMIT,
C       SIDE PIER-VESSEL CONTACT AREA,KEEL PIER-VESSEL CONTACT AREA,
C       CAP BLOCK INCLINATION ANGLE.

        read(44,*) weight,h,Ik,dtau,kvs,kvk,khs,khk,gravity
        read(44,*) baseside, basekeel,htside,htkeel,ul,u2
        read(44,*) br,amp,plside,plkeel,sidearea,keelarea,zeta
        read(44,*) hull,nsys
        write (6,*) 'do you want response plots? (y or n)'
        read(5,15) dec
15      format (a)
        do 10,i=1,6
        do 11,j=1,6
        a(i,j)=0.0
        b(i,j)=0.0
11      continue
10      continue
        do 12,i=1,3
        do 13,j=1,3
        m(i,j)=0.0
        k(i,j)=0.0
        cx(i,j)=0.0
13      continue
12      continue
```

```
C          CALCULATE SYSTEM PARAMETERS

           mass=weight/gravity

           beta=asin(sqrt(br**2/(4*h**2)))

           m(1,1)=mass
           m(1,3)=h*mass
           m(2,2)=mass
           m(3,1)=mass*h
           m(3,3)=Ik

           k(1,1)=(2*khs+khk)
           k(2,2)=(2*kvs+kvk)
           k(3,3)=((0.5*kvs*(br**2.0))-(weight*h))

C          DETERMINE NATURAL FREQUENCIES OF SYSTEM

           bbb=-(m(1,1)*k(3,3)+m(3,3)*k(1,1)-m(1,3)*k(3,1)-m(3,1)*k(1,3))
      +    /(m(1,1)*m(3,3)-m(1,3)*m(3,1))
           ccc=(k(1,1)*k(3,3)-k(1,3)*k(3,1))/(m(1,1)*m(3,3)-m(1,3)*m(3,1))
C
C          NATURAL FREQ. MODE #1

           w12=(-bbb-sqrt(bbb**2.0-4*ccc))/2
           w1=sqrt(w12)

C          NATURAL FREQ. MODE #2

           w22=k(2,2)/m(2,2)
           w2=sqrt(w22)
C          NATURAL FREQ. MODE #3

           w32=(-bbb+sqrt(bbb**2.0-4*ccc))/2
           w3=sqrt(w32)

C          MODE SHAPE #1 & #3

           mode1=(m(1,3)*w12-k(1,3))/(-m(1,1)*w12+k(1,1))
           mode3=(m(1,3)*w32-k(1,3))/(-m(1,1)*w32+k(1,1))
C          DETERMINE C11,C13,C31,C33
           mmx1=m(1,1)+m(1,3)/mode1
           mmang1=mode1*m(3,1)+m(3,3)
           mmx3=m(1,1)+m(1,3)/mode3
           mmang3=mode3*m(3,1)+m(3,3)
           mmmmm1=2*zeta*mmx1*w1
           mmmmm2=2*zeta*mmx3*w3
           mmmmm3=2*zeta*mmang1*w1
           mmmmm4=2*zeta*mmang3*w3




           cx(1,3)=(mmmmm1-mmmmm2)/(1/mode1-1/mode3)
           cx(1,1)=mmmmm1-(cx(1,3)/mode1)
           cx(2,2)=2*zeta*m(2,2)*w2
```

-129-

```fortran
      cx(3,1)=(mmmmm3-mmmmm4)/(model-mode3)
      cx(3,3)=mmmmm3-(cx(3,1)*model)

C     SET UP A AND B MATRICES,PERFORM EIGENVALUE PROBLEM. AND
C     DECOUPLE EQUATIONS OF MOTION

      a(1,4)= m(1,1)
      a(1,6)= m(1,3)
      a(2,5)= m(2,2)
      a(3,4)= m(3,1)
      a(3,6)= m(3,3)
      a(4,1)= m(1,1)
      a(4,3)= m(1,3)
      a(4,4)= cx(1,1)
      a(4,6)= cx(1,3)
      a(5,2)= m(2,2)
      a(5,5)= cx(2,2)
      a(6,1)= m(3,1)
      a(6,3)= m(3,3)
      a(6,4)= cx(3,1)
      a(6,6)= cx(3,3)

      b(1,1)= -m(1,1)
      b(1,3)= -m(1,3)
      b(2,2)= -m(2,2)
      b(3,1)= -m(3,1)
      b(3,3)= -m(3,3)
      b(4,4)= k(1,1)
      b(4,6)= k(1,3)
      b(5,5)= k(2,2)
      b(6,4)= k(3,1)
      b(6,6)= k(3,3)


      do 100, i=1,6
      do 110, j=1,6
      an(i,j)= -1.0*a(i,j)
110   continue
100   continue

      ia=6
      ib=6
      ic=6
      iz=6
      n=6
      ijob=2
      call eigzf(b,ia,an,ib,n,ijob,alfa,betal,z,iz,wk,ier)
      WRITE(6,*) wk(1),ier

      DO 200,i=1,6
      do 201,j=1,6
      zt(j,i)= z(i,j)
201   continue
200   CONTINUE
      call mult (zt,a,aa)
      call multc (aa,z,ad)
      call mult (zt,b,bb)
      call multc (bb,z,bd)
      do 204,i=1,6
      v(i)=-1.0*bd(i,1)/ad(i,1)
```

-130-

```fortran
204       continue

C         READ IN ACCELERATION DATA

          do 300,n=1,5001,5
          read (45,*) ac(n),ac(n+1),ac(n+2),ac(n+3),ac(n+4)
300       continue
C         ESTABLISH FAILURE CRITERIA AND FLAGS

          crit1= min(u1,(u2*cos(beta)+sin(beta))/
     +    (cos(beta)-u2*sin(beta)))
          crit2=min (u1,u2)
          crit3= (0.66*baseside-12.0)/htside
          crit4=basekeel/(6*htkeel)
          ampacc=1.0
          counter=0.0
          ampacmax=0.0
10000     continue
          flag1=0
          flag2=0
          flag3=0
          flag4=0
          flag5=0
          flag6=0
          flag7=0
          flag8=0
          flag10=0
          do 50000 i=1,6
          ABC(i)=0.0
50000     continue
          maxx=0.0
          maxt=0.0
          maxy=0.0
          mm=0
C         SOLVE FOR Y,THE COLUMN MATRIX WHICH IS THE SOLUTION IN
C         THE IMAGINARY COORDINATE SYSTEM WHERE THE EQUATIONS OF MOTION
C         ARE DECOUPLED

          do 301,l=3,3501,2
          do 302,i=1,6
          g(i)=(ABC(i)+ac(l-2)/2.54)*exp(v(i)*2*dtau)
     +    +4.0*(ac(l-1)/2.54)*exp(v(i)*dtau)+ac(l)/2.54
          ABC(i)=g(i)
          yy(i,1)=((zt(i,4)+amp*zt(i,5)+zt(i,6)*h)*mass/ad(i,i))*g(i)
     +    *ampacc*-dtau/3
302       continue
          mm=mm+1

C         USING THE MODAL MATRIX ( 4th,5th, AND 6th ROWS ), OBTAIN
C         VALUES FOR TRANSLATIONS AND ROTATION

          do 303, i=1,6
          si(i)=z(4,i)*yy(i,1)+si(i-1)
303       continue
          x(mm)=si(6)
          if (abs(x(mm)).gt.abs(maxx)) then
                  timex=dtau*(l-1)
                  maxx=x(mm)
          endif
          do 304, i=1,6
```

-131-

```
              ri(i)=z(6,i)*yy(i,1)+ri(i-1)
304           continue
              t(mm)=ri(6)
              if (abs(t(mm)).gt.abs(maxt)) then
                      timet=dtau*(l-1)
                      maxt=t(mm)
              endif
              do 305, i=1,6
              pi(i)=z(5,i)*yy(i,1)+pi(i-1)
305           continue
              y(mm)=pi(6)
              if (abs(y(mm)).gt.abs(maxy)) then
                      timey=dtau*(l-1)
                      maxy=y(mm)
              endif

C        CALCULATE VERTICAL AND HORIZONTAL FORCES CAUSED BY VESSEL,
C        TEST FOR FAILURE

C        CALCULATE FORCES ON SIDE/KEEL BLOCKS
              rf1=kvs*((weight/k(2,2))-y(mm)-(br/2)*t(mm))
              rf2=kvs*((weight/k(2,2))-y(mm)+(br/2)*t(mm))
              rf3=kvk*((weight/k(2,2))-y(mm))
              hf1=khs*(x(mm))
              hf2=khs*(x(mm))
              hf3=khk*x(mm)
C        TEST FOR SIDE BLOCK SLIDING

              if (flag1.eq.1) then
                      go to 400
              else if (hf1.lt.0.0.and.rf1.gt.0.0.and.abs(hf1/rf1).gt.crit1) then
                      time1= dtau*(l-1)
                      flag1=1
              else if (hf2.gt.0.0.and.rf2.gt.0.0.and.abs(hf2/rf2).gt.crit1) then
                      time1=dtau*(l-1)
                      flag1=1
              endif
              x1=x(mm)
              y1=y(mm)
              t1=t(mm)
400           continue

C        TEST FOR KEEL BLOCK SLIDING

              if (flag2.eq.1) then
                      go to 410
              else if (rf3.gt.0.0.and.abs(hf3/rf3).gt.crit2) then
                      time2=dtau*(l-1)
                      flag2=1
              endif
              x2=x(mm)
              y2=y(mm)
              t2=t(mm)
410           continue
C        TEST FOR SIDE BLOCK OVERTURNING

              if (flag3.eq.1) then
                      go to 420
              else if (hf1.lt.0.0.and.rf1.gt.0.0.and.abs(hf1/rf1).gt.crit3) then
                      time3= dtau*(l-1)
```

```
                    flag3=1
            else if (hf2.gt.0.0.and.rf2.gt.0.0.and.abs(hf2/rf2).gt.crit3) then
                    time3=dtau*(l-1)
                    flag3=1
            endif
            x3=x(mm)
            y3=y(mm)
            t3=t(mm)
420     continue

C       TEST FOR KEEL BLOCK OVERTURNING

        if (flag4.eq.1) then
                go to 430
        else if (rf3.gt.0.0.and.abs(hf3/rf3).gt.crit4) then
                time4=dtau*(l-1)
                flag4=1
        endif
        x4=x(mm)
        y4=y(mm)
        t4=t(mm)
430     continue

C       TEST FOR SIDE BLOCK LIFTOFF

        if (flag5.eq.1) then
                go to 440
        else if (rf1.lt.0.0 .or. rf2.lt.0.0) then
                time5=dtau*(l-1)
                flag5=1
        endif
        x5=x(mm)
        y5=y(mm)
        t5=t(mm)
440     continue

C       TEST FOR KEEL BLOCK LIFTOFF

        if (flag6.eq.1) then
                go to 450
        else if (rf3.lt.0.0) then
                time6=dtau*(l-1)
                flag6=1
        endif
        x6=x(mm)
        y6=y(mm)
        t6=t(mm)
450     continue

C       TEST FOR SIDE BLOCK CRUSHING

        if (flag7.eq.1) then
                go to 460
        else if (rf1.gt.0.0 .and. (rf1/sidearea).gt.plside) then
                flag7=1
                time7=dtau*(l-1)

        else if (rf2.gt.0.0 .and. (rf2/sidearea).gt.plside) then
                flag7=1
                time7=dtau*(l-1)
```

-133-

```
            endif
            x7=x(mm)
            y7=y(mm)
            t7=t(mm)
460         continue

C           TEST FOR KEEL BLOCK CRUSHING

            if (flag8.eq.1) then
                    go to 470
            else if (rf3.gt.0.0 .and. (rf3/keelarea).gt.plkeel) then
                    flag8=1
                    time8=dtau*(1-1)
            endif
            x8=x(mm)
            y8=y(mm)
            t8=t(mm)
470         continue

301         continue


C           PLOT RESULTS
            go to 999
60000       continue
            if(DEC.EQ.'N') THEN
            write(6,*) 'I am finishing.'
                    GO TO 998
            endif
            write(6,*) 'I am plotting.'
            XSCL(1)=0.0
            XSCL(2)=30.0
            XLABEL='TIME IN SECONDS'
            YLABEL='ROTATION IN RADIANS'
            YYLABEL='RELATIVE HORIZONTIAL DISPLACEMENT IN INCHES'
            YYYLABEL='RELATIVE VERTICAL DISPLACEMENT IN INCHES'
            CALL QPICTR (X,1,1500,QXSCL(XSCL),QISCL(-2),QXLAB(XLABEL),
          +  QYLAB(YYLABEL),QLABEL(4))
            CALL QPICTR (T,1,1500,QXSCL(XSCL),QISCL(-2),QXLAB(XLABEL),
          +  QYLAB(YLABEL),QLABEL(4))
            CALL QPICTR (Y,1,1500,QXSCL(XSCL),QISCL(-2),QXLAB(XLABEL),
          +  QYLAB(YYYLABEL),QLABEL(4))
998         go to 20000
999         CONTINUE

            if(ampacc.eq.1.0) then

            write(46,4000) nsys
4000        format(1x,/,28x,'**** System ',I2,1x,'****')
            write(46,4050) hull
4050        format(1x,/,30x,'** Hull ',I3,1x,'**')
            write(46,4100)
4100        format(1x,//,28x,'* Ship Parameters *')
            write(46,4150)
4150        format(1x,/,5x,'Weight',8x,'Moment of Inertia',9x,'K.G.')
            write(46,4200) weight,Ik,h
4200        format(1x,f9.1,1x,'kips',1x,f11.1,1x,'kips-in-sec2',
          +3x,f6.1,1X,'ins')
            write(46,4250)
4250        format(1x,//,26x,'* Drydock Parameter *')
```

```fortran
        write(46,4300)
4300    format(1x,/,1x,'Side Block Height',3x,'Side Block Width',
       +3x,'Keel Block Height',3x,'Keel Block Width')
        write(46,4350) htside,baseside,htkeel,basekeel
4350    format(2x,f6.1,1x,'ins',11x,f6.1,1x,'ins',11x,f6.1,1x,'ins',
       +9x,f6.1,1x,'ins')
        write(46,4400)
4400    format(1x,/,1x,'Side-to-Side Pier Distance')
        write(46,4450) br
4450    format(1x,t7,f6.1,1x,'ins')
        write(46,4470)
4470    format(1x,/,' Total Side Pier Contact Area'
       +,3x,'Total Keel Pier Contact Area')
        write(46,4475) sidearea,keelarea
4475    format(1x,8x,f11.1,1x,'in2',14x,f11.1,1x,'in2')
        write(46,4500)
4500    format(1x,/,1x,'Block-on-Block Friction Coeff',3x,'Hull-on-Block
       + Friction Coeff')
        write(46,4550) u1,u2
4550    format(1x,10x,f7.3,23x,f7.3)
        write(46,4600)
4600    format(1x,/,1x,'Side Pier Proportional Limit',3x,'Keel Pier'
       +,' Proportional Limit')
        write(46,4650) plside,plside
4650    format(1x,10x,f7.3,1x,'kips/in2'15x,f7.3,1x,'kips/in2')
        write(46,4700)
4700    format(1x,/,1x,'Side Pier Vertical Stiffness',3x,'Side Pier',
       +' Horizontal Stiffness')
        write(46,4750) kvs,khs
4750    format(1x,3x,f11.1,1x,'kips/in',11x,f11.1,1x,'kips/in')
        write(46,4775)
4775    format(1x,/,1x,'Keel Pier Vertical Stiffness',3x,
       +'Keel Pier Horizontal Stiffness')
        write(46,4780) kvk,khk
4780    format(1x,3x,f11.1,1x,'kips/in',11x,f11.1,1x,'kips/in')
        write(46,4800)
4800    format(1x,//,20x,'* System Parameters and Inputs *')
        write(46,4850)
4850    format(1x,/,1x,'Input Forcing Function is Horizontal Component',
       +' of the 1946 El Centro')
        write(46,4875)
4875    format(1x,20x,' Earthquake Acceleration Time History.')

        write(46,4995)
4995    format(1x,/,1x,'Vertical/Horizontal Ground Acceleration Ratio'
       +,3x,'Data Time Increment')
        write(46,4990) amp,dtau
4990    format(1x,10x,f6.3,t55,f6.3,1X,'sec')
        write(46,4900)
4900    format(1x,/,1x,'Gravitational Constant',3x,'Percent System
       + Damping')
        write(46,4950) gravity,zeta*100.
4950    format(1x,7x,f6.2,1x,'in/sec2',10x,f6.2,1x,'%')
        write(46,5000)
5000    format(1x,/,25x,'Mass Matrix',/)
        do 5100 i=1,3
        write(46,5050) m(i,1),m(i,2),m(i,3)
5050    format(1x,f15.4,5x,f15.4,5x,f15.4)
5100    continue
        write(46,5200)
```

```fortran
5200      format(1x,/,25x,'Damping Matrix',/)
          do 5300 i=1,3
          write(46,5250) cx(i,1),cx(i,2),cx(i,3)
5250      format(1x,f15.4,5x,f15.4,5x,f15.4)
5300      continue
          write(46,5400)
5400      format(1x,/,25x,'Stiffness Matrix',/)
          do 5500 i=1,3
          write(46,5450) k(i,1),k(i,2),k(i,3)
5450      format(1x,f15.4,5x,f15.4,5x,f15.4)
5500      continue
          write(46,5700)
5700      format(1x,//)
          WRITE(46,6000)
6000      FORMAT(1X,'Undamped Natural Frequencies',t35,'Mode #1',t50,
         +'Mode #2',t65,'Mode #3')
          write(46,6001) w1,w2,w3
6001      format(1x,t31,f7.3,1x,'rad/sec',t46,f7.3,1x,'rad/sec',t62,f7.3,
         +' rad/sec')
          WRITE(46,6002)
6002      FORMAT(1X,'Damped Natural Frequencies',t35,'Mode #1',t50,
         +'Mode #2',t65,'Mode #3')
          WRITE(46,6500) w1*sqrt(1-zeta**2),w2*sqrt(1-zeta**2),w3*sqrt(1-zeta**2)
6500      format(1x,t31,f7.3,1x,'rad/sec',t46,f7.3,1x,'rad/sec',t62,f7.3,
         +' rad/sec')
          endif

          write(46,10500) ampacc*100
10500     format(1x,///,1x,'For Earthquake Acceleration of ',f6.2,' % '
         +,'of the El Centro',/)

          write(46,25000)
25000     format(1x,'Maximums/Failures',t26,'X (ins)',t36,'Y (ins)',t51,
         +'Theta (rads)',t65,'Time (sec)')
          write(46,25001)
25001     format(1x,'------------------',t25,'--------',t35,'--------',t50,
         +'------------',t64,'-----------')
          write (46,310) maxx,timex
310       format (1x,' Maximum X',t25,f9.6,t65,f5.2)
          write (46,311) maxy,timey
311       format (1x,' Maximum Y',t35,f9.6,t65,f5.2)
          write (46,312) maxt,timet
312       format (1x,' Maximum Rotation',t50,f9.6,t65,f5.2)

          if (flag1.eq.1) then
          flag10=flag10+1
                  write (46,313) x1,y1,t1,time1
313       format (1x,'Side block sliding' ,t25,f9.6,t35,f9.6,t50,f9.6,
         +t65,f5.2)

          endif

          if (flag2.eq.1) then
          flag10=flag10+1
                  write (46,314) x2,y2,t2,time2
314       format (1x,'Keel block sliding' ,t25,f9.6,t35,f9.6,t50,f9.6,
         +t65,f5.2)
          endif

          if (flag3.eq.1) then
```

```fortran
        flag10=flag10+1
            write (46,315) x3,y3,t3,time3
315     format (1x,'Side block overturning' ,t25,f9.6,t35,f9.6,t50,f9.6,
       +t65,f5.2)
        endif

        if (flag4.eq.1) then
        flag10=flag10+1
            write (46,316) x4,y4,t4,time4
316     format (1x,'Keel block overturning' ,t25,f9.6,t35,f9.6,t50,f9.6,
       +t65,f5.2)
        endif

        if (flag5.eq.1) then
        flag10=flag10+1
            write (46,317) x5,y5,t5,time5
317     format (1x,'Side block liftoff' ,t25,f9.6,t35,f9.6,t50,f9.6,
       +t65,f5.2)
        endif

        if (flag6.eq.1) then
        flag10=flag10+1
            write (46,318) x6,y6,t6,time6
318     format (1x,'Keel block liftoff' ,t25,f9.6,t35,f9.6,t50,f9.6,
       +t65,f5.2)
        endif

        if (flag7.eq.1) then
        flag10=flag10+1
            write (46,319) x7,y7,t7,time7
319     format (1x,'Side block crushing' ,t25,f9.6,t35,f9.6,t50,f9.6,
       +t65,f5.2)
        endif

        if (flag8.eq.1) then
        flag10=flag10+1
            write (46,320) x8,y8,t8,time8
320     format (1x,'Keel block crushing' ,t25,f9.6,t35,f9.6,t50,f9.6,
       +t65,f5.2)
        endif

        if(flag10.le.0) then
        write(46,11000)
11000   format(1x,/,1x,'No failures occurred.')
        if(counter.eq.1.0 .and. flag10.le.0) then
        go to 60000
        endif
        if(counter.eq.0.0) then
        ampacmax=ampacc
        ampacc=ampacc+.1
        counter=1.0
        write(6,*) 'I am in the secondary looping stage.'
        endif
        endif
        if(ampacc.le.ampacmax) go to 20000
        if(counter.eq.1.0) then
        ampacc=ampacc-.01
        else if(counter.eq.0.0) then
        ampacc=ampacc-.1
        endif
```

-137-

```fortran
        go to 10000
20000   continue
        stop
        end

        subroutine mult (a,b,cyy)
        real b(6,6)
        complex a(6,6),cyy(6,6),d(6)
        do 100,i=1,6
        do 200,j=1,6
        do 300,k=1,6
        d(k)=a(i,k)*b(k,j)
300     continue
        cyy(i,j)=d(1)+d(2)+d(3)+d(4)+d(5)+d(6)
200     continue
100     continue
        return
        end

        subroutine multc (a,b,cyx)
        complex a(6,6),b(6,6),cyx(6,6),d(6)
        do 100, i=1,6
        do 200, j=1,6
        do 300, k=1,6
        d(k)=a(i,k)*b(k,j)
300     continue
        cyx(i,j)=d(1)+d(2)+d(3)+d(4)+d(5)+d(6)
200     continue
100     continue
        return
        end
```

```
C        NON-LINEAR THREE DEGREE OF FREEDOM SYSTEM RESPONSE
C         USING FOURTH ORDER RUNGE-KUTTA METHOD

         integer NN,l,mm,n,hull,nsys,flag10
         integer flag1,flag2,flag3,flag4,flag5,flag6,flag7,flag8
         real beta,weight,h,Ik,gravity
         real m(3,3),cx(3,3),k(3,3),sidearea,keelarea,plside
         real baseside,basekeel,htside,htkeel,crit1,crit2,crit3
         real ac(6000),dtau,maxx,maxt,maxy,timex,timet
         real rf1,rf2,rf3,hf1,hf2,hf3,ampacc,mass,ampacmax
         real kvs,kvk,khs,khk,base,ht,counter
         real time1,time2,time3,time4,time5,time6,time7,time8
         real x(6000),t(6000),y(6000),XSCL(6)
         real bbb,ccc,w12,w1,w22,w2,w32,w3,model,mode3,capwidth
         real mmx1,mmang1,mmx3,mmang3,br,amp,plkeel,crit4,u1,u2
         real timey,mmmmm1,mmmmm2,mmmmm3,mmmmm4
         real R,S,TAU,A(5),B(5),C(5),D(5),E(5),F(5),G(5),HH(5)
         CHARACTER*40 XLABEL,YLABEL,YYLABEL,YYYLABEL,DEC




C        READ IN VESSEL AND DRYDOCK DATA; VESSEL WEIGHT,KG,I(ABOUT KEEL),
C        TIME INCREMENT OF DATA POINTS,VERTICAL STIFFNESS OF SIDE AND
C        KEEL PIERS,HORIZONTAL STIFFNESS OF SIDE AND KEEL PIERS,
C        GAVITATIONAL CONSTANT,SIDE BLOCK BASE AND HEIGHT,
C        KEEL BLOCK BASE AND HEIGHT,
C        BLOCK-BLOCK AND BLOCK-HULL FRICTION COEFFICIENTS,
C        SIDE AND KEEL BLOCK'S PROPORTIONAL LIMIT,
C        SIDE PIER-VESSEL CONTACT AREA,KEEL PIER-VESSEL CONTACT AREA,
C        CAP BLOCK INCLINATION ANGLE.

         read(44,*) weight,h,Ik,dtau,kvs,kvk,khs,khk,gravity
         read(44,*) baseside, basekeel,htside,htkeel,u1,u2
         read(44,*) br,amp,plside,plkeel,sidearea,keelarea,zeta
         read(44,*) hull,nsys
         write (6,*) 'do you want response plots? (y or n)'
         read(5,15) dec
15       format (a)
         do 12,i=1,3
         do 13,j=1,3
         m(i,j)=0.0
         k(i,j)=0.0
         cx(i,j)=0.0
13       continue
12       continue


C        CALCULATE SYSTEM PARAMETERS

         mass=weight/gravity

         beta=asin(sqrt(br**2/(4*h**2)))
```

```fortran
      m(1,1)=mass
      m(1,3)=h*mass
      m(2,2)=mass
      m(3,1)=mass*h
      m(3,3)=Ik

      k(1,1)=(2*khs+khk)
      k(2,2)=(2*kvs+kvk)
      k(3,3)=((0.5*kvs*(br**2.0))-(weight*h))
C     DETERMINE NATURAL FREQUENCIES OF SYSTEM

      bbb=-(m(1,1)*k(3,3)+m(3,3)*k(1,1)-m(1,3)*k(3,1)-m(3,1)*k(1,3))
     +  /(m(1,1)*m(3,3)-m(1,3)*m(3,1))
      ccc=(k(1,1)*k(3,3)-k(1,3)*k(3,1))/(m(1,1)*m(3,3)-m(1,3)*m(3,1))
C

C     NATURAL FREQ. MODE #1

      w12=(-bbb-sqrt(bbb**2.0-4*ccc))/2
      w1=sqrt(w12)

C     NATURAL FREQ. MODE #2

      w22=k(2,2)/m(2,2)
      w2=sqrt(w22)
C     NATURAL FREQ. MODE #3

      w32=(-bbb+sqrt(bbb**2.0-4*ccc))/2
      w3=sqrt(w32)

C     MODE SHAPE #1 & #3

      mode1=(m(1,3)*w12-k(1,3))/(-m(1,1)*w12+k(1,1))
      mode3=(m(1,3)*w32-k(1,3))/(-m(1,1)*w32+k(1,1))
C     DETERMINE C11,C13,C31,C33
      mmx1=m(1,1)+m(1,3)/mode1
      mmang1=mode1*m(3,1)+m(3,3)
      mmx3=m(1,1)+m(1,3)/mode3
      mmang3=mode3*m(3,1)+m(3,3)
      mmmmm1=2*zeta*mmx1*w1
      mmmmm2=2*zeta*mmx3*w3
      mmmmm3=2*zeta*mmang1*w1
      mmmmm4=2*zeta*mmang3*w3




      cx(1,3)=(mmmmm1-mmmmm2)/(1/mode1-1/mode3)
      cx(1,1)=mmmmm1-(cx(1,3)/mode1)
      cx(2,2)=2*zeta*m(2,2)*w2
      cx(3,1)=(mmmmm3-mmmmm4)/(mode1-mode3)
      cx(3,3)=mmmmm3-(cx(3,1)*mode1)



C     READ IN ACCELERATION DATA

      do 300,n=1,5001,5
```

```fortran
          read (45,*) ac(n),ac(n+1),ac(n+2),ac(n+3),ac(n+4)
300       continue
C         ESTABLISH FAILURE CRITERIA AND FLAGS

          crit1= min(u1,(u2*cos(beta)+sin(beta))/
     +    (cos(beta)-u2*sin(beta)))
          crit2=min (u1,u2)
          crit3= (0.66*baseside-12.0)/htside
          crit4=basekeel/(6*htkeel)
          ampacc=1.0
          counter=0.0
          ampacmax=0.0
10000     continue
          flag1=0
          flag2=0
          flag3=0
          flag4=0
          flag5=0
          flag6=0
          flag7=0
          flag8=0
          flag10=0
          maxx=0.0
          maxt=0.0
          maxy=0.0
          mm=0
          x(1)=0.0
          y(1)=0.0
          t(1)=0.0
          R=0.0
          S=0.0
          TAU=0.0


C         IMPLEMENTATION OF EQUATIONS OF MOTION INTO THE
C         RUNGE-KUTTA FORMULUS

          do 301,1=1,6000
            DO 3000,11=0,4
              A(11)=0.0
              B(11)=0.0
              C(11)=0.0
              D(11)=0.0
              E(11)=0.0
              F(11)=0.0
              G(11)=0.0
              HH(11)=0.0
3000      CONTINUE
          mm=mm+1
            DO 302, NN=1,4
            IF(NN.EQ.1) THEN
             FF=0.0
            ELSE IF (NN.EQ.2 .OR. NN.EQ.3) THEN
             FF=0.5
            ELSE IF (NN.EQ.4) THEN
             FF=1.0
            ENDIF
            A(NN)=dtau*(R+FF*D(NN-1))

            B(NN)=dtau*(S+FF*E(NN-1))
```

```
                    C(NN)=dtau*(TAU+FF*F(NN-1))

                    D(NN)=dtau*((-cx(2,2)/m(2,2))*(R+FF*D(NN-1))-(k(2,2)/m(2,2))
                   +*(y(mm)+FF*A(NN-1))-amp*ampacc*ac(1)/2.54)

                    G(NN)=dtau*((-cx(1,1)/m(1,1))*(S+FF*E(NN-1))-(cx(1,3)/m(1,1))
                   +*(TAU+FF*F(NN-1))-(k(1,1)/m(1,1))*(x(mm)+FF*B(NN-1))-ampacc*ac(1)/
                   +2.54)
                    HH(NN)=dtau*((-cx(3,3)/m(3,3))*(TAU+FF*F(NN-1))-(cx(3,1)/m(3,3))
                   +*(S+FF*E(NN-1))-(k(3,3)/m(3,3))*(t(mm)+FF*C(NN-1))+(m(3,1)/m(3,3))
                   +*((-cx(2,2)/m(2,2))*(R+FF*D(NN-1))-(k(2,2)/m(2,2))*(y(mm)+FF*A(NN-
                   +1)))*(t(mm)+FF*C(NN-1))-(m(3,1)/m(3,3))*ampacc*ac(1)/2.54)

                    E(NN)=(m(1,1)*m(3,3)*G(NN)-m(1,3)*m(3,3)*HH(NN))/
                   +(m(3,3)*m(1,1)-m(1,3)*m(3,1))
                    F(NN)=(HH(NN)-(m(3,1)/m(3,3))*E(NN))
        302         continue

        C       DETERMINING SYSTEM RESPONSE

                    y(mm+1)=y(mm)+(A(1)+2*A(2)+2*A(3)+A(4))/6

                    x(mm+1)=x(mm)+(B(1)+2*B(2)+2*B(3)+B(4))/6

                    t(mm+1)=t(mm)+(C(1)+2*C(2)+2*C(3)+C(4))/6

                    R=R+(D(1)+2*D(2)+2*D(3)+D(4))/6

                    S=S+(E(1)+2*E(2)+2*E(3)+E(4))/6

                    TAU=TAU+(F(1)+2*F(2)+2*F(3)+F(4))/6


        C       MAXIMUM VALUES FOR TRANSLATIONS AND ROTATION

                    if (abs(x(mm)).gt.abs(maxx)) then
                            timex=dtau*(l-1)
                            maxx=x(mm)
                    endif
                    if (abs(t(mm)).gt.abs(maxt)) then
                            timet=dtau*(l-1)
                            maxt=t(mm)
                    endif
                    if (abs(y(mm)).gt.abs(maxy)) then
                            timey=dtau*(l-1)
                            maxy=y(mm)
                    endif

        C       CALCULATE VERTICAL AND HORIZONTAL FORCES CAUSED BY VESSEL,
        C       TEST FOR FAILURE

        C       CALCULATE FORCES ON SIDE/KEEL BLOCKS
                    rf1=kvs*((weight/k(2,2))-y(mm)-(br/2)*t(mm))
                    rf2=kvs*((weight/k(2,2))-y(mm)+(br/2)*t(mm))
                    rf3=kvk*((weight/k(2,2))-y(mm))
                    hf1=khs*(x(mm))
                    hf2=khs*(x(mm))
```

```
            hf3=khk*x(mm)
C           TEST FOR SIDE BLOCK SLIDING

            if (flag1.eq.1) then
                    go to 400
            else if (hf1.lt.0.0.and.rf1.gt.0.0.and.abs(hf1/rf1).gt.crit1) then
                    time1= dtau*(1-1)
                    flag1=1
            else if (hf2.gt.0.0.and.rf2.gt.0.0.and.abs(hf2/rf2).gt.crit1) then
                    time1=dtau*(1-1)
                    flag1=1
            endif
            x1=x(mm)
            y1=y(mm)
            t1=t(mm)
400         continue

C           TEST FOR KEEL BLOCK SLIDING

            if (flag2.eq.1) then
                    go to 410
            else if (rf3.gt.0.0.and.abs(hf3/rf3).gt.crit2) then
                    time2=dtau*(1-1)
                    flag2=1
            endi
            x2=x(mm)
            y2=y(mm)
            t2=t(mm)
410         continue
C           TEST FOR SIDE BLOCK OVERTURNING

            if (flag3.eq.1) then
                    go to 420
            else if (hf1.lt.0.0.and.rf1.gt.0.0.and.abs(hf1/rf1).gt.crit3) then
                    time3= dtau*(1-1)
                    flag3=1
            else if (hf2.gt.0.0.and.rf2.gt.0.0.and.abs(hf2/rf2).gt.crit3) then
                    time3=dtau*(1-1)
                    flag3=1
            endif
            x3=x(mm)
            y3=y(mm)
            t3=t(mm)
420         continue

C           TEST FOR KEEL BLOCK OVERTURNING

            if (flag4.eq.1) then
                    go to 430
            else if (rf3.gt.0.0.and.abs(hf3/rf3).gt.crit4) then
                    time4=dtau*(1-1)
                    flag4=1
            endif
            x4=x(mm)
            y4=y(mm)
            t4=t(mm)
430         continue

C           TEST FOR SIDE BLOCK LIFTOFF
```

-143-

```fortran
              if (flag5.eq.1) then
                      go to 440
              else if (rf1.lt.0.0 .or. rf2.lt.0.0) then
                      time5=dtau*(1-1)
                      flag5=1
              endif
              x5=x(mm)
              y5=y(mm)
              t5=t(mm)
440           continue

C       TEST FOR KEEL BLOCK LIFTOFF

              if (flag6.eq.1) then
                      go to 450
              else if (rf3.lt.0.0) then
                      time6=dtau*(1-1)
                      flag6=1
              endif
              x6=x(mm)
              y6=y(mm)
              t6=t(mm)
450           continue

C       TEST FOR SIDE BLOCK CRUSHING

              if (flag7.eq.1) then
                      go to 460
              else if (rf1.gt.0.0 .and. (rf1/sidearea).gt.plside) then
                      flag7=1
                      time7=dtau*(1-1)

              else if (rf2.gt.0.0 .and. (rf2/sidearea).gt.plside) then
                      flag7=1
                      time7=dtau*(1-1)
              endif
              x7=x(mm)
              y7=y(mm)
              t7=t(mm)
460           continue

C       TEST FOR KEEL BLOCK CRUSHING

              if (flag8.eq.1) then
                      go to 470
              else if (rf3.gt.0.0 .and. (rf3/keelarea).gt.plkeel) then
                      flag8=1
                      time8=dtau*(1-1)
              endif
              x8=x(mm)
              y8=y(mm)
              t8=t(mm)
470           continue

301           continue


C       PLOT RESULTS
              go to 999
60000         continue
```

-144-

```
              if(DEC.EQ.'N') THEN
              write(6,*) 'I am finishing.'
                    GO TO 998
              endif
              write(6,*) 'I am plotting.'
              XSCL(1)=0.0
              XSCL(2)=30.0
              XLABEL='TIME IN SECONDS'
              YLABEL='ROTATION IN RADIANS'
              YYLABEL='RELATIVE HORIZONTIAL DISPLACEMENT IN INCHES'
              YYYLABEL='RELATIVE VERTICAL DISPLACEMENT IN INCHES'
              CALL QPICTR (X,1,3000,QXSCL(XSCL),QISCL(-2),QXLAB(XLABEL),
             +   QYLAB(YYLABEL),QLABEL(4))
              CALL QPICTR (T,1,3000,QXSCL(XSCL),QISCL(-2),QXLAB(XLABEL),
             +   QYLAB(YLABEL),QLABEL(4))
              CALL QPICTR (Y,1,3000,QXSCL(XSCL),QISCL(-2),QXLAB(XLABEL),
             +   QYLAB(YYYLABEL),QLABEL(4))
998           go to 20000
999           CONTINUE

              if(ampacc.eq.1.0) then

              write(46,4000) nsys
4000          format(1x,/,28x,'**** System ',I2,1x,'****')
              write(46,4050) hull
4050          format(1x,/,30x,'** Hull ',I3,1x,'**')
              write(46,4100)
4100          format(1x,//,28x,'* Ship Parameters *')
              write(46,4150)
4150          format(1x,/,5x,'Weight',8x,'Moment of Inertia',9x,'K.G.')
              write(46,4200) weight,Ik,h
4200          format(1x,f9.1,1x,'kips',1x,f11.1,1x,'kips-in-sec2',
             +3x,f6.1,1X,'ins')
              write(46,4250)
4250          format(1x,//,26x,'* Drydock Parameter *')
              write(46,4300)
4300          format(1x,/,1x,'Side Block Height',3x,'Side Block Width',
             +3x,'Keel Block Height',3x,'Keel Block Width')
              write(46,4350) htside,baseside,htkeel,basekeel
4350          format(2x,f6.1,1x,'ins',11x,f6.1,1x,'ins',11x,f6.1,1x,'ins',
             +9x,f6.1,1x,'ins')
              write(46,4400)
4400          format(1x,/,1x,'Side-to-Side Pier Distance')
              write(46,4450) br
4450          format(1x,t7,f6.1,1x,'ins')
              write(46,4470)
4470          format(1x,/,' Total Side Pier Contact Area'
             +,3x,'Total Keel Pier Contact Area')
              write(46,4475) sidearea,keelarea
4475          format(1x,8x,f11.1,1x,'in2',14x,f11.1,1x,'in2')
              write(46,4500)
4500          format(1x,/,1x,'Block-on-Block Friction Coeff',3x,'Hull-on-Block
             + Friction Coeff')
              write(46,4550) u1,u2
4550          format(1x,10x,f7.3,23x,f7.3)
              write(46,4600)
4600          format(1x,/,1x,'Side Pier Proportional Limit',3x,'Keel Pier'
             +,' Proportional Limit')
              write(46,4650) plside,plside
4650          format(1x,10x,f7.3,1x,'kips/in2'15x,f7.3,1x,'kips/in2')
```

```
          write(46,4700)
4700      format(1x,/,1x,'Side Pier Vertical Stiffness',3x,'Side Pier',
     +' Horizontal Stiffness')
          write(46,4750) kvs,khs
4750      format(1x,3x,f11.1,1x,'kips/in',11x,f11.1,1x,'kips/in')
          write(46,4775)
4775      format(1x,/,1x,'Keel Pier Vertical Stiffness',3x,
     +'Keel Pier Horizontal Stiffness')
          write(46,4780) kvk,khk
4780      format(1x,3x,f11.1,1x,'kips/in',11x,f11.1,1x,'kips/in')
          write(46,4800)
4800      format(1x,//,20x,'* System Parameters and Inputs *')
          write(46,4850)
4850      format(1x,/,1x,'Input Forcing Function is Horizontal Component',
     +' of the 1946 El Centro')
          write(46,4875)
4875      format(1x,20x,' Earthquake Acceleration Time History.')


          write(46,4995)
4995      format(1x,/,1x,'Vertical/Horizontal Ground Acceleration Ratio'
     +,3x,'Data Time Increment')
          write(46,4990) amp,dtau
4990      format(1x,10x,f6.3,t55,f6.3,1X,'sec')
          write(46,4900)
4900      format(1x,/,1x,'Gravitational Constant',3x,'Percent System
     + Damping')
          write(46,4950) gravity,zeta*100.
4950      format(1x,7x,f6.2,1x,'in/sec2',10x,f6.2,1x,'%')
          write(46,5000)
5000      format(1x,/,25x,'Mass Matrix',/)
          do 5100 i=1,3
          write(46,5050) m(i,1),m(i,2),m(i,3)
5050      format(1x,f15.4,5x,f15.4,5x,f15.4)
5100      continue
          write(46,5200)
5200      format(1x,/,25x,'Damping Matrix',/)
          do 5300 i=1,3
          write(46,5250) cx(i,1),cx(i,2),cx(i,3)
5250      format(1x,f15.4,5x,f15.4,5x,f15.4)
5300      continue
          write(46,5400)
5400      format(1x,/,25x,'Stiffness Matrix',/)
          do 5500 i=1,3
          write(46,5450) k(i,1),k(i,2),k(i,3)
5450      format(1x,f15.4,5x,f15.4,5x,f15.4)
5500      continue
          write(46,5700)
5700      format(1x,//)
          WRITE(46,6000)
6000      FORMAT(1X,'Undamped Natural Frequencies',t35,'Mode #1',t50,
     +'Mode #2',t65,'Mode #3')
          write(46,6001) w1,w2,w3
6001      format(1x,t31,f7.3,1x,'rad/sec',t46,f7.3,1x,'rad/sec',t62,f7.3,
     +' rad/sec')
          WRITE(46,6002)
6002      FORMAT(1X,'Damped Natural Frequencies',t35,'Mode #1',t50,
     +'Mode #2',t65,'Mode #3')
          WRITE(46,6500) w1*sqrt(1-zeta**2),w2*sqrt(1-zeta**2),w3*sqrt(1-zeta**2)
6500      format(1x,t31,f7.3,1x,'rad/sec',t46,f7.3,1x,'rad/sec',t62,f7.3,
     +' rad/sec')
```

```
        endif

        write(46,10500) ampacc*100
10500   format(1x,///,1x,'For Earthquake Acceleration of ',f6.2,' % '
       +,'of the El Centro',/)

        write(46,25000)
25000   format(1x,'Maximums/Failures',t26,'X (ins)',t36,'Y (ins)',t51,
       +'Theta (rads)',t65,'Time (sec)')
        write(46,25001)
25001   format(1x,'------------------',t25,'--------',t35,'--------',t50,
       +'-------------',t64,'-----------')
        write (46,310) maxx,timex
310     format (1x,' Maximum X',t25,f9.6,t65,f5.2)
        write (46,311) maxy,timey
311     format (1x,' Maximum Y',t35,f9.6,t65,f5.2)
        write (46,312) maxt,timet
312     format (1x,' Maximum Rotation',t50,f9.6,t65,f5.2)

        if (flag1.eq.1) then
        flag10=flag10+1
                write (46,313) x1,y1,t1,time1
313     format (1x,'Side block sliding' ,t25,f9.6,t35,f9.6,t50,f9.6,
       +t65,f5.2)

        endif

        if (flag2.eq.1) then
        flag10=flag10+1
                write (46,314) x2,y2,t2,time2
314     format (1x,'Keel block sliding' ,t25,f9.6,t35,f9.6,t50,f9.6,
       +t65,f5.2)
        endif

        if (flag3.eq.1) then
        flag10=flag10+1
                write (46,315) x3,y3,t3,time3
315     format (1x,'Side block overturning' ,t25,f9.6,t35,f9.6,t50,f9.6,
       +t65,f5.2)
        endif

        if (flag4.eq.1) then
        flag10=flag10+1
                write (46,316) x4,y4,t4,time4
316     format (1x,'Keel block overturning' ,t25,f9.6,t35,f9.6,t50,f9.6,
       +t65,f5.2)
        endif

        if (flag5.eq.1) then
        flag10=flag10+1
                write (46,317) x5,y5,t5,time5
317     format (1x,'Side block liftoff' ,t25,f9.6,t35,f9.6,t50,f9.6,
       +t65,f5.2)
        endif

        if (flag6.eq.1) then
        flag10=flag10+1
                write (46,318) x6,y6,t6,time6
318     format (1x,'Keel block liftoff' ,t25,f9.6,t35,f9.6,t50,f9.6,
       +t65,f5.2)
```

-147-

```fortran
          endif

          if (flag7.eq.1) then
          flag10=flag10+1
                  write (46,319) x7,y7,t7,time7
319       format (1x,'Side block crushing' ,t25,f9.6,t35,f9.6,t50,f9.6,
      +t65,f5.2)
          endif

          if (flag8.eq.1) then
          flag10=flag10+1
                  write (46,320) x8,y8,t8,time8
320       format (1x,'Keel block crushing' ,t25,f9.6,t35,f9.6,t50,f9.6,
      +t65,f5.2)
          endif

          if(flag10.le.0) then
          write(46,11000)
11000     format(1x,/,1x,'No failures occurred.')
          if(counter.eq.1.0 .and. flag10.le.0) then
          go to 60000
          endif
          if(counter.eq.0.0) then
          ampacmax=ampacc
          ampacc=ampacc+.1
          counter=1.0
          write(6,*) 'I am in the secondary looping stage.'
          endif
          endif
          if(ampacc.le.ampacmax) go to 20000
          if(counter.eq.1.0) then
          ampacc=ampacc-.01
          else if(counter.eq.0.0) then
          ampacc=ampacc-.1
          endif
          go to 10000
20000     continue
          stop
          end
```

# APPENDIX 3

## MODAL ANALYSIS OF THE TWO AND THREE DEGREE OF FREEDOM SYSTEMS

Since the vertical equation of motion is uncoupled from the other equations, the three degree of freedom system need only to be analyzed to obtain damping coefficients for both degree of freedom mathematical models. Also, the maximum response of the two systems will be determined using response spectrum analysis with participation factors described in Section 6.4.

The three degree of freedom equations of motions, undamped, as shown in Equations 4.4.11a, b and c are

$$m_{11} \ddot{x} + m_{13} \ddot{\theta} + k_{11} x = -m_{11} \ddot{x}_g$$

$$m_{22} \ddot{y} + k_{22} y = -m_{22} \ddot{y}_g$$

and

$$m_{33} \ddot{\theta} + m_{31} \ddot{x} + k_{33} \theta = -m_{31} \ddot{x}_g$$

where  $m_{11} = m_{22} = M$

$$m_{13} = m_{31} = M\overline{KG}$$

$$m_{33} = I_k$$

$$k_{11} = 2K_{sh} + K_{kh}$$

$$k_{22} = 2K_{sv} + K_{kv}$$

$$k_{33} = (B^2/2) K_{sv} - W \overline{KG}.$$

To perform modal analysis, consider the free vibration system

$$m_{11} \ddot{x} + m_{13} \ddot{\theta} + k_{11} x = 0$$

$$m_{22} \ddot{y} + k_{22} y = 0$$

and

$$m_{33} \ddot{\theta} + m_{31} \ddot{x} + k_{33} \theta = 0.$$

Assume the system response is in the form

$$x = \phi_1 \sin(\omega t + \rho)$$

$$y = \phi_2 \sin(\omega t + \rho)$$

and $\theta = \phi_3 \sin(\omega t + \rho)$.

Now, the equations of motion are

$$m_{11}(-\phi_1 \omega^2 \sin(\omega t + \rho)) + m_{13}(-\phi_3 \omega^2 \sin(\omega t + \rho))$$
$$+ k_{11}(\phi_1 \sin(\omega t + \rho)) = 0$$

$$m_{22}(-\phi_2 \omega^2 \sin(\omega t + \rho)) + k_{22}(\phi_2 \sin(\omega t + \rho)) = 0$$

and

$$m_{33}(-\phi_3 \omega^2 \sin(\omega t + \rho)) + m_{31}(-\phi_1 \omega^2 \sin(\omega t + \rho))$$
$$+ k_{33}(\phi_3 \sin(\omega t + \rho)) = 0.$$

The trivial solution to the above set of equations is
$\sin(\omega t + \rho) = 0$. Assuming $\sin(\omega t + \rho) = 0$, then

$$\begin{bmatrix} k_{11}-m_{11}\omega^2 & 0 & -m_{13}\omega^2 \\ 0 & k_{22}-m_{22}\omega^2 & 0 \\ -m_{31}\omega^2 & 0 & k_{33}-m_{33}\omega^2 \end{bmatrix} \begin{bmatrix} \phi_1 \\ \phi_2 \\ \phi_3 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}. \qquad \text{(A.3.1)}$$

These equations are solved for $\omega$ by setting the determinant of
the first matrix equal to 0. However, the second row of the
matrix is uncoupled. Thus one solution for  is

$$\omega^2 = k_{22}/m_{22}.$$

Now, the determinant equation reduces to

$$\omega^4 - \omega^2 \left( \frac{m_{11}k_{11}+m_{33}k_{33}}{m_{11}m_{33}-m_{31}m_{31}} \right) + \frac{k_{11}k_{33}}{m_{11}m_{33}-m_{13}m_{31}} = 0.$$

Using the quadratic formula, the other values of $\omega^2$ are

$$\omega^2 = \frac{-b \pm \sqrt{b^2-4c}}{2} \qquad \text{(A.3.2)}$$

where    $b = -\left(\dfrac{m_{11}k_{11}+m_{33}k_{33}}{m_{11}m_{33}-m_{13}m_{31}}\right)$

and    $c = \dfrac{k_{11}k_{33}}{m_{11}m_{33}-m_{13}m_{31}}$ .

Using parameters found in Section 5 for the eleven representative vessel-drydock systems, the natural frequencies $\omega_1$, $\omega_2$, and $\omega_3$ for each system is calculated and listed in Table A3.1.

The mode shapes are determined with the relationship

$$(k_{11} - m_{11}\omega^2)\ \phi_1 - m_{13}\omega^2\ \phi_3 = 0$$

or    $\dfrac{\phi_1}{\phi_3} = \dfrac{m_{13}\ \omega^2}{k_{11}-m_{11}\omega^2}$ ,    $\omega = \omega_1, \omega_3$ .

With mode shapes determined, the equation or motion can be rewritten, including coupled damping

$$m_{11}\ \ddot{x} + m_{13}\ \ddot{\theta} + c_{11}\ \dot{x} + c_{13}\ \dot{\theta} + k_{11}\ x = 0$$

$$m_{22}\ \ddot{y} + c_{22}\ \dot{y} + k_{22}\ y = 0$$

and

$$m_{33}\ \ddot{\theta} + m_{31}\ \ddot{x} + c_{33}\ \dot{\theta} + c_{31}\ \dot{x} + k_{33}\ = 0.$$

At natural frequencies $\omega_1$, $\omega_2$ and $\omega_3$ the coupled three degree of freedom system acts as a single degree of freedom system with the following relationship:

$$(\phi_1/\phi_3)\ x = \theta$$
$$(\phi_1/\phi_3)\ \dot{x} = \dot{\theta}$$

and    $(\phi_1/\phi_3)\ \ddot{x} = \ddot{\theta}$ .

Using these relationships, the three degree of freedom equations of motion at the three system natural frequencies are

$$[m_{11} + (\phi_3/\phi_1)m_{13}]\,\ddot{x} + [c_{11} + (\phi_3/\phi_1)c_{31}]\,\dot{x} + k_{11}\,x = 0$$

$$m_{22}\,\ddot{y} + c_{22}\,\dot{y} + k_{22}\,y = 0$$

and

$$[(\phi_1/\phi_3)m_{31} + m_{33}]\ddot{\theta} + [(\phi_1/\phi_3)c_{31} + c_{33}]\dot{\theta} + k_{33}\theta = 0.$$

The damping coefficients for the problem are 5% of the critical damping for each mode,

$$[c_{11} + (\phi_3/\phi_1)c_{13}] = 2\,\xi M_1 \omega_n\ ,\ \omega_n = 1,3 \qquad \text{(A3.3a)}$$

$$c_{22} = 2\xi\,m_{22}\,\omega_2 \qquad\qquad\qquad\qquad \text{(A3.3b)}$$

and

$$[(\phi_1/\phi_3)_n\,c_{31} + c_{33}] = 2\,M_3\,\omega_n,\quad \omega_n = 1,3 \qquad \text{(A3.3c)}$$

where $\xi$ = percentage of critical damping, 0.05

$$M_1 = m_{11} + (\phi_3/\phi_1)_n\,m_{13}$$

and $M_3 = m_{33} + (\phi_1/\phi_3)_n\,m_{31}.$

Substituting known values and rearranging Equations A3.3a and A3.3c yields the following four equations:

Mode 1, $\qquad c_{11} + (\phi_3/\phi_1)_1\,c_{13} = 2\,\xi M_1 \omega_1$

$\qquad\qquad\qquad (\phi_1/\phi_3)_1\,c_{31} + c_{33} = 2\,\xi M_3 \omega_1$

Mode 2, $\qquad c_{11} + (\phi_3/\phi_1)_3\,c_{13} = 2\,\xi M_1 \omega_3$

$\qquad\qquad\qquad (\phi_1/\phi_3)_3\,c_{31} + c_{33} = 2\,\xi M_3 \omega_3$

or $\qquad\qquad c_{11} + (\phi_3/\phi_1)_1\,c_{13} = 2\,\xi M_1 \omega_1$

$\qquad\qquad\qquad c_{11} + (\phi_3/\phi_1)_3\,c_{13} = 2\,\xi M_1 \omega_3$

and $\qquad\qquad (\phi_1/\phi_3)_1\,c_{31} + c_{33} = 2\,\xi M_3 \omega_1$

$\qquad\qquad\qquad (\phi_1/\phi_3)_3\,c_{31} + c_{33} = 2\,\xi M_3 \omega_3$

Using the above set of equations and equation A3.3b, damping coefficients $c_{11}$, $c_{13}$, $c_{22}$, $c_{31}$, and $c_{33}$ are determined and listed in Table A3.2 for the eleven vessel-drydock configurations. Note that $c_{13}$ equals to $c_{31}$. In the two degree of freedom case, the damping coefficients $c_{11}$, $c_{12}$, $c_{21}$, and $c_{22}$

are equal to those in the three degree problem, i.e.

| Two Degree Case | Three Degree Case |
|:---:|:---:|
| $c_{11}$ | $c_{11}$ |
| $c_{12}$ | $c_{13}$ |
| $c_{21}$ | $c_{31}$ |
| $c_{22}$ | $c_{33}$ . |

Using the response spectrum method and modal participation factors, the maximum response of the two and three degrees of freedom systems can be calculated. Starting with the forced vibration equation

$$[m_{11} + (\phi_3/\phi_1)_n m_{13}] \ddot{x} + c_1 \dot{x} + k_{11} x = -m_{11} \ddot{x}_g$$

or

$$\ddot{x} + \frac{c_1\dot{x} + k_{11}x}{\left[m_{11}+(\phi_3/\phi_1)_n m_{13}\right]} = \frac{-m_{11}}{\left[m_{11}+(\phi_3/\phi_1)m_{13}\right]} \ddot{x}_g$$

Equations 6.3.1, 6.3.2 and 6.3.3 predict a maximum response for a 5% critically damped system for a given mode as

$$(x_{max})_n = 11.62* \frac{m_{11}}{\left[m_{11}+(\phi_3/\phi_1)_n m_{13}\right]} \quad \text{for } \omega_1, \omega_3 < 2.24$$

$$\text{or } (x_{max})_n = \frac{26.03}{\omega} * \frac{m_{11}}{\left[m_{11}+(\phi_3/\phi_1)_n m_{13}\right]} \quad \text{for } 2.24 < \omega_1, \omega_3 < 12.74$$

$$\text{else } (x_{max})_n = \frac{331.53}{\omega^2} * \frac{m_{11}}{\left[m_{11}+(\phi_3/\phi_1)_n m_{13}\right]} \quad \text{for } \omega_1, \omega_3 > 12.74$$

Similarly for rotational response, the equation of motion is

$$[m_{33} + (\phi_1/\phi_3)_n m_{31}] \ddot{\theta} + c_3 \dot{\theta} + k_{33} \theta = -m_{31} \ddot{x}_g$$

or

$$\ddot{\theta} + \frac{c_3\dot{\theta}+k_{33}\theta}{[m_{33}+(\phi_1/\phi_3)_n m_{31}]} = \frac{-m_{31}}{[m_{33}+(\phi_1/\phi_3)_n m_{31}]} \ddot{x}_g$$

and the maximum response for given mode is

$$(\theta_{max})_n = 11.62 \; \frac{m_{31}}{[m_{33}+(\phi_1/\phi_3)_n m_{31}]} \quad \text{for } \omega_1, \; \omega_3 < 2.24$$

or $$(\theta_{max})_n = \frac{26.03}{\omega} * \frac{m_{31}}{[m_{33}+(\phi_1/\phi_3)_n m_{31}]} \quad \text{for } 2.24 < \omega_1, \; \omega_3 < 12.74$$

else $$(\theta_{max})_n = \frac{331.53}{\omega^2} * \frac{m_{31}}{[m_{33}+(\phi_1/\phi_3)_n m_{31}]} \quad \text{for } \omega_1, \; \omega_3 > 12.74$$

Since being uncoupled, the vertical equation of motion is

$$m_{22} \ddot{Y} + c_2 \dot{Y} + k_{22} y = -m_{22} \ddot{Y}_g$$

or $$\ddot{y} + \frac{c_2 \dot{y} + k_{22} y}{m_{22}} = -\ddot{y}_g = -AMP \; \ddot{x}_g$$

where AMP = ratio of vertical/horizontal El Centro earthquake

accelerations.

The maximum vertical response is

$$(Y_{max})_2 = 11.62 \quad * \; AMP \quad \text{for } \omega_2 < 2/24$$

or

$$(Y_{max})_2 = \frac{26.03}{\omega} \quad * \; AMP \quad \text{for } 2.24 < \omega_2 < 12.74$$

else

$$(Y_{max})_2 = \frac{331.53}{\omega^2} * \; AMP \quad \text{for } \omega_2 > 12.74.$$

Now, the maximum response for each mode of the x and $\theta$

equations and for the uncoupled y equation are calculated.

The configuration of the three degree of freedom system

at any time is a superposition of the two coupled natural mode

shapes along with the independent vertical maximum response.

The absolute maximum response to a given earthquake is the

numerical summation of the maximum response of each mode shape

times its respective participation factor. The general

formula for each modal participation factor is

$$\Gamma_n = \Sigma M_r \phi_{rn} / M_r \phi^2_{rn}$$

where      $\Gamma_n$ = modal particpation factor for the $n^{th}$ mode

         r~ refers to which equation of motion is being

             considered. In the three degree of freeddom

             case, r = 1 or 3.

Using these particpation factors, the maximum response of the

three degree of freedom system should be no greater than

$$x_{max} = (x_{max})_1 \; \Gamma_1 + (x_{max})_3 \; \Gamma_3,$$

$$y_{max} = (y_{max})_2$$

and   $\theta_{max} = (\theta_{max})_1 \; \Gamma_1 + (\theta_{max})_3 \; \Gamma_3.$

These maximum response are determined and listed in Table A3.3

for the eleven vessel-drydock configurations. Once again due

to the uncoupled vertical response, the maximum response of x

and $\theta$ in the two degree of freedom is identical to that of the

three degree of freedom case.

## TABLE A3.1

### Three Degree of Freedom Vessel-Drydock System
### Natural Frequencies
### (rad/sec)

| SYSTEM | $\omega_1$ | $\omega_2$ | $\omega_3$ |
|--------|------------|------------|------------|
| 1 | 5.454 | 39.071 | 37.230 |
| 2 | 3.883 | 36.823 | 34.367 |
| 3 | 4.013 | 29.468 | 23.791 |
| 4 | 2.819 | 27.773 | 21.511 |
| 5 | 2.848 | 35.737 | 32.742 |
| 6 | 9.690 | 45.450 | 40.863 |
| 7 | 7.953 | 41.322 | 36.351 |
| 8 | 6.976 | 39.247 | 34.045 |
| 9 | 5.863 | 32.829 | 29.060 |
| 10 | 6.857 | 34.832 | 29.921 |
| 11 | 6.177 | 33.293 | 28.010 |

NOTE:  Two Degree of Freedom System Natural Frequencies correspond to $\omega_1$ and $\omega_3$.

## TABLE A3.2

### Three Degree of Freedom Vessel-Drydock System
### Damping Coefficients
### (kim-sec/inch)

| SYSTEM | $c_{11}$ | $c_{22}$ | $c_{33}$ | $c_{13}$, $c_{31}$ |
|--------|----------|----------|----------|----------|
| 1 | 65.398 | 166.826 | 1322882.125 | 3920.416 |
| 2 | 58.612 | 157.226 | 938583.250 | 2874.701 |
| 3 | 42.452 | 125.824 | 976657.438 | 2829.964 |
| 4 | 37.308 | 118.583 | 682485.813 | 2053.786 |
| 5 | 54.303 | 152.588 | 687504.500 | 2159.187 |
| 6 | 188.657 | 445.695 | 7879946.000 | 17130.227 |
| 7 | 167.100 | 405.212 | 6430934.500 | 14269.135 |
| 8 | 155.786 | 384.866 | 5622059.000 | 12660.506 |
| 9 | 43.963 | 116.475 | 1196244.250 | 3340.509 |
| 10 | 33.833 | 86.437 | 836179.438 | 2408.758 |
| 11 | 31.639 | 82.618 | 751062.813 | 2185.568 |

NOTE: Two Degree of Freedom System Damping Coefficients correspond to $c_{11}$, $c_{13}$, $c_{31}$ and $c_{33}$.

TABLE A3.3

Three Degree of Freedom Vessel-Drydock System
Maximum Response Using Response Spectrum Analysis

| SYSTEM | $x$ (ins.) | $y$ (ins.) | $\theta$ (rads.) |
|--------|---------|---------|---------|
| 1  | 0.33275 | 0.10859 | 0.01646 |
| 2  | 0.27141 | 0.12225 | 0.02348 |
| 3  | 0.65142 | 0.19089 | 0.02350 |
| 4  | 0.53788 | 0.21491 | 0.02350 |
| 5  | 0.21468 | 0.12980 | 0.03202 |
| 6  | 0.45271 | 0.08025 | 0.00683 |
| 7  | 0.46833 | 0.09708 | 0.00866 |
| 8  | 0.46597 | 0.10762 | 0.01009 |
| 9  | 0.64366 | 0.15381 | 0.01525 |
| 10 | 0.65864 | 0.13662 | 0.01342 |
| 11 | 0.67467 | 0.14955 | 0.01522 |

NOTE:  Two Degree of Freedom System Maximum Response
correspond to $x$ and $\theta$.

END

12-86

DTIC